





































Integrated Lighting














SEL Integrated Lighting Series, makes light and space coexist perfectly and combines luminaire, architectural space and furniture & cabinet skillfully in order to create effects of “Integrated Architecture lighting” and “Integrated Furniture lighting”, with seeing lighting free from luminaire.




Product List






Model	Drawing	Lighting distribution		Size LxWxH(mm)	Installation	Coating	Light source
Basic							
SEL-LS0510				2500x5x10			NPS0409
SEL-LS0709				2500x7.6x9	 	  	D6120-24V-4mm
SEL-LS0812				2500x7.8x12	 	  	D6120-24V-4mm
SEL-LE1212				2500x12x12		  	D6120-24V-8mm D8120-24V-8mm
SEL-LR0812				2500x47.8x12			D6120-24V-4mm
SEL-LS1607				2500x16x7	 	  	D6300-24V-8mm
SEL-LS1613				2500x16x13	 	  	D6120-24V-8mm D8120-24V-8mm
SEL-LE2507				2500x25x7		  	D6300-24V-8mm
SEL-LE2513				2500x25x13		  	D6120-24V-8mm D8120-24V-8mm
SEL-LR1613				2500x56x13			D6120-24V-8mm D8120-24V-8mm
SEL-LS2013				2500x20x13	 	  	D6280-24V-10mm
SEL-LS2020				2500x20x20	 	  	D6280-24V-10mm
SEL-LR2013				2500x60x13			D6280-24V-10mm
SEL-LR3735				2500x99x35			D8168-24V-10mm
SEL-LR3924				2500x85x24			D8280-24V-20mm
SEL-LR5535(A)				2500x95x35			D8280-24V-34mm
SEL-LR5535(B)				2500x93x35			D8280-24V-34mm
SEL-LR10324				2500x150x24			D8560-24V-85mm

Product List

Model	Drawing	Lighting distribution		Size LxWxH(mm)	Installation	Coating	Light source
Gypsum lighting							
SEL-LG7043				2500x43x70			D6120-24V-8mm D8120-24V-8mm
SEL-LG7070				2500x70x70			D6120-24V-8mm D8120-24V-8mm
Skirt lighting							
SEL-LG8513				2500x13x85			D6120-24V-8mm D8120-24V-8mm
Floor lighting							
SEL-LS2126				2500x21.4x27			D6120-24V-8mm D8120-24V-8mm
SEL-LE2711				2500x27.1x11			D8168-24V-10mm
Corner lighting							
SEL-LG2323				2500x40.3x24.3			D6120-24V-4mm
SEL-LG2727				2500x44.9x22.2			D6120-24V-4mm
SEL-LG1616C				2500x16x16			D6120-24V-8mm D8120-24V-8mm
SEL-LG1616K				2500x16x16			D6120-24V-8mm D8120-24V-8mm
SEL-LG3030C				2500x30x30			D6280-24V-10mm
SEL-LG3030K				2500x30x30			D6280-24V-10mm
Edge lighting							
SEL-LE1616				2500x38.4x36.5			D6120-24V-8mm D8120-24V-8mm
SEL-LR1616				2500x26x30.5			D6120-24V-8mm D8120-24V-8mm

Model	Drawing	Lighting distribution		Size LxWxH(mm)	Installation	Coating	Light source
Vario lighting							
SEL-LE2409				2500x23.8x8.8			D6120-24V-4mm
SEL-LS1612L				2500x16x12			D6120-12V-8mm D8120-24V-8mm
SEL-LS1911K				2500x19.7x19.7			D6280-24V-10mm
SEL-LS1911C				2500x19.7x19.6			D6280-24V-10mm

Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m		LM/m(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Silicone neon strip														
SEL-NPS0409		140	7/50mm		24	5.8	5		70	>90	2700 K 3000 K 4000 K 6000 K	5000x4x9mm	5M/Roll	LS0510
Flexible strip														
SEL-D6120-24V-4mm		120	6/50mm		24	9.6	8.6		710	>90	2700 K 3000 K 4000 K 6000 K	5000x4x1.2mm	5M/Roll	LS0709 / LS0812 / LE1212 / LE2409 / LR0812 / LR2323 / LR2727
SEL-D6120-24V-8mm		120	6/50mm		24	9.6	8.6		710	>90	2700 K 3000 K 4000 K 6000 K	5000x8x1.2mm	5M/Roll	LS1613 / LE2513 / LG1616C / LG1616K / LS1612L / LG7070 / LG7043 / LS2126 / SK10031 / SK8231 / LG8513
SEL-D6300-24V-8mm		300	6/20mm		24	14	13		1134	>90	2700 K 3000 K 4000 K 6000 K	5000x8x1.2mm	5M/Roll	LS1607 / LE2507
SEL-D6280-24V-10mm		280	14/50mm		24	16.2	15		1508	>90	2700 K 3000 K 4000 K 6000 K	5000x10x1.2mm	5M/Roll	LS1911K / LS1911C / LG3030C / LG3030K
SEL-D8120-24V-8mm		120	6/50mm		24	14.4	13.5		1320	>90	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x8x1.6mm	5M/Roll	LG7070 / LG7043 / LS2126 / LG8513
SEL-D8168-24V-10mm		168	7/42mm		24	17.3	16.2		1860	>90	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x10x1.6mm	5M/Roll	LE2711 / LR3735
SEL-D6280-24V-10mm		280	14/50mm		24	16.2	15		1508	>90	2700 K 3000 K 4000 K 6000 K	5000x10x1.2mm	5M/Roll	LR2013
SEL-D8280-24V-20mm		280	14/50mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x20x1.5mm	2.5M/Roll	LR3924
SEL-D8280-24V-34mm		280	14/50mm		24	27.5	25		3250 2750	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x34x1.5mm	2.5M/Roll	LR5535(A) / LR5535(B)
SEL-D8560-24V-85mm		560	28/50mm		24	44	40		5050 4300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x85x1.5mm	2.5M/Roll	LR10324

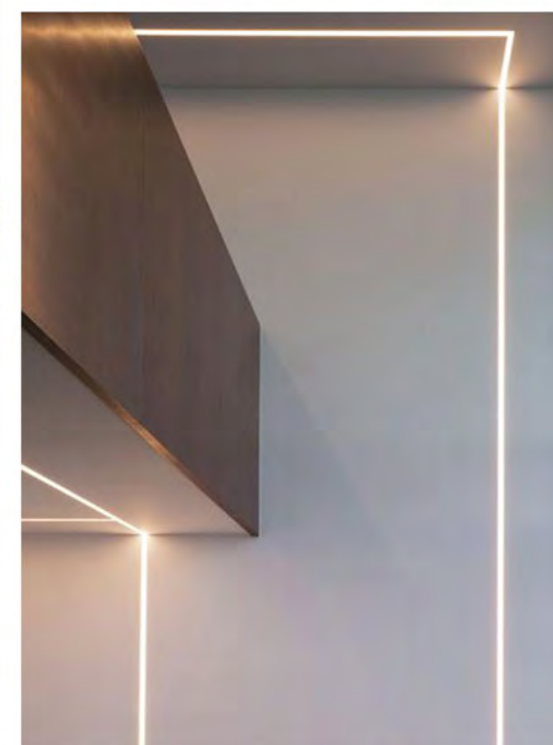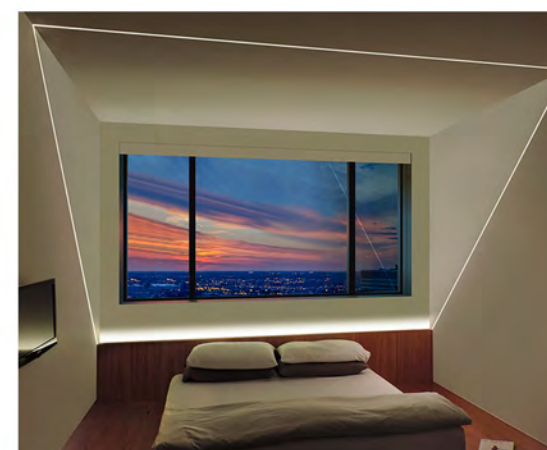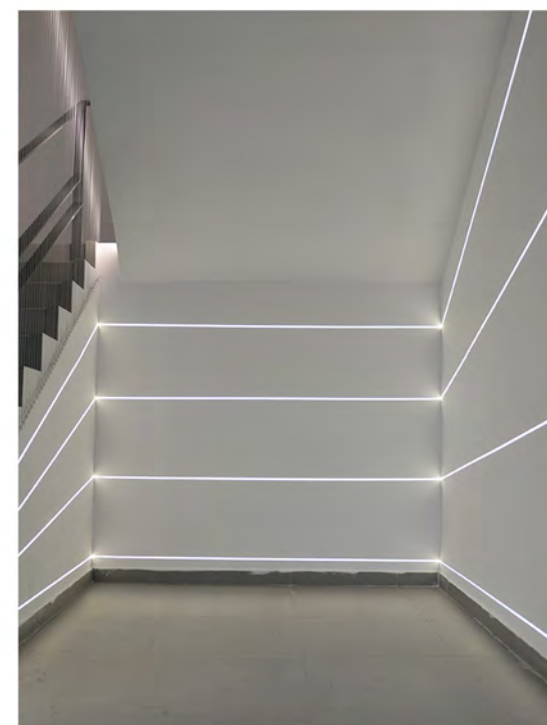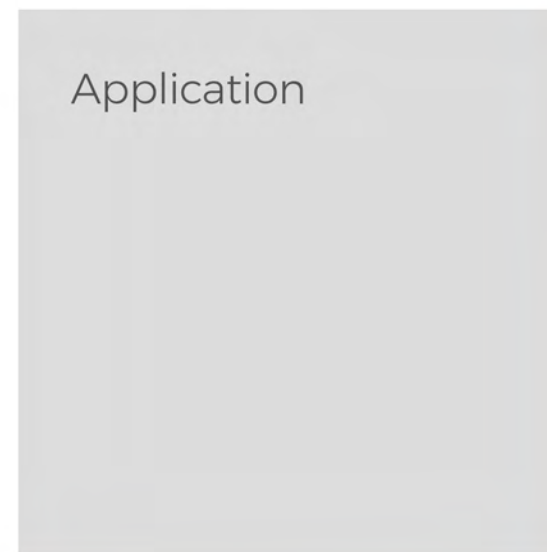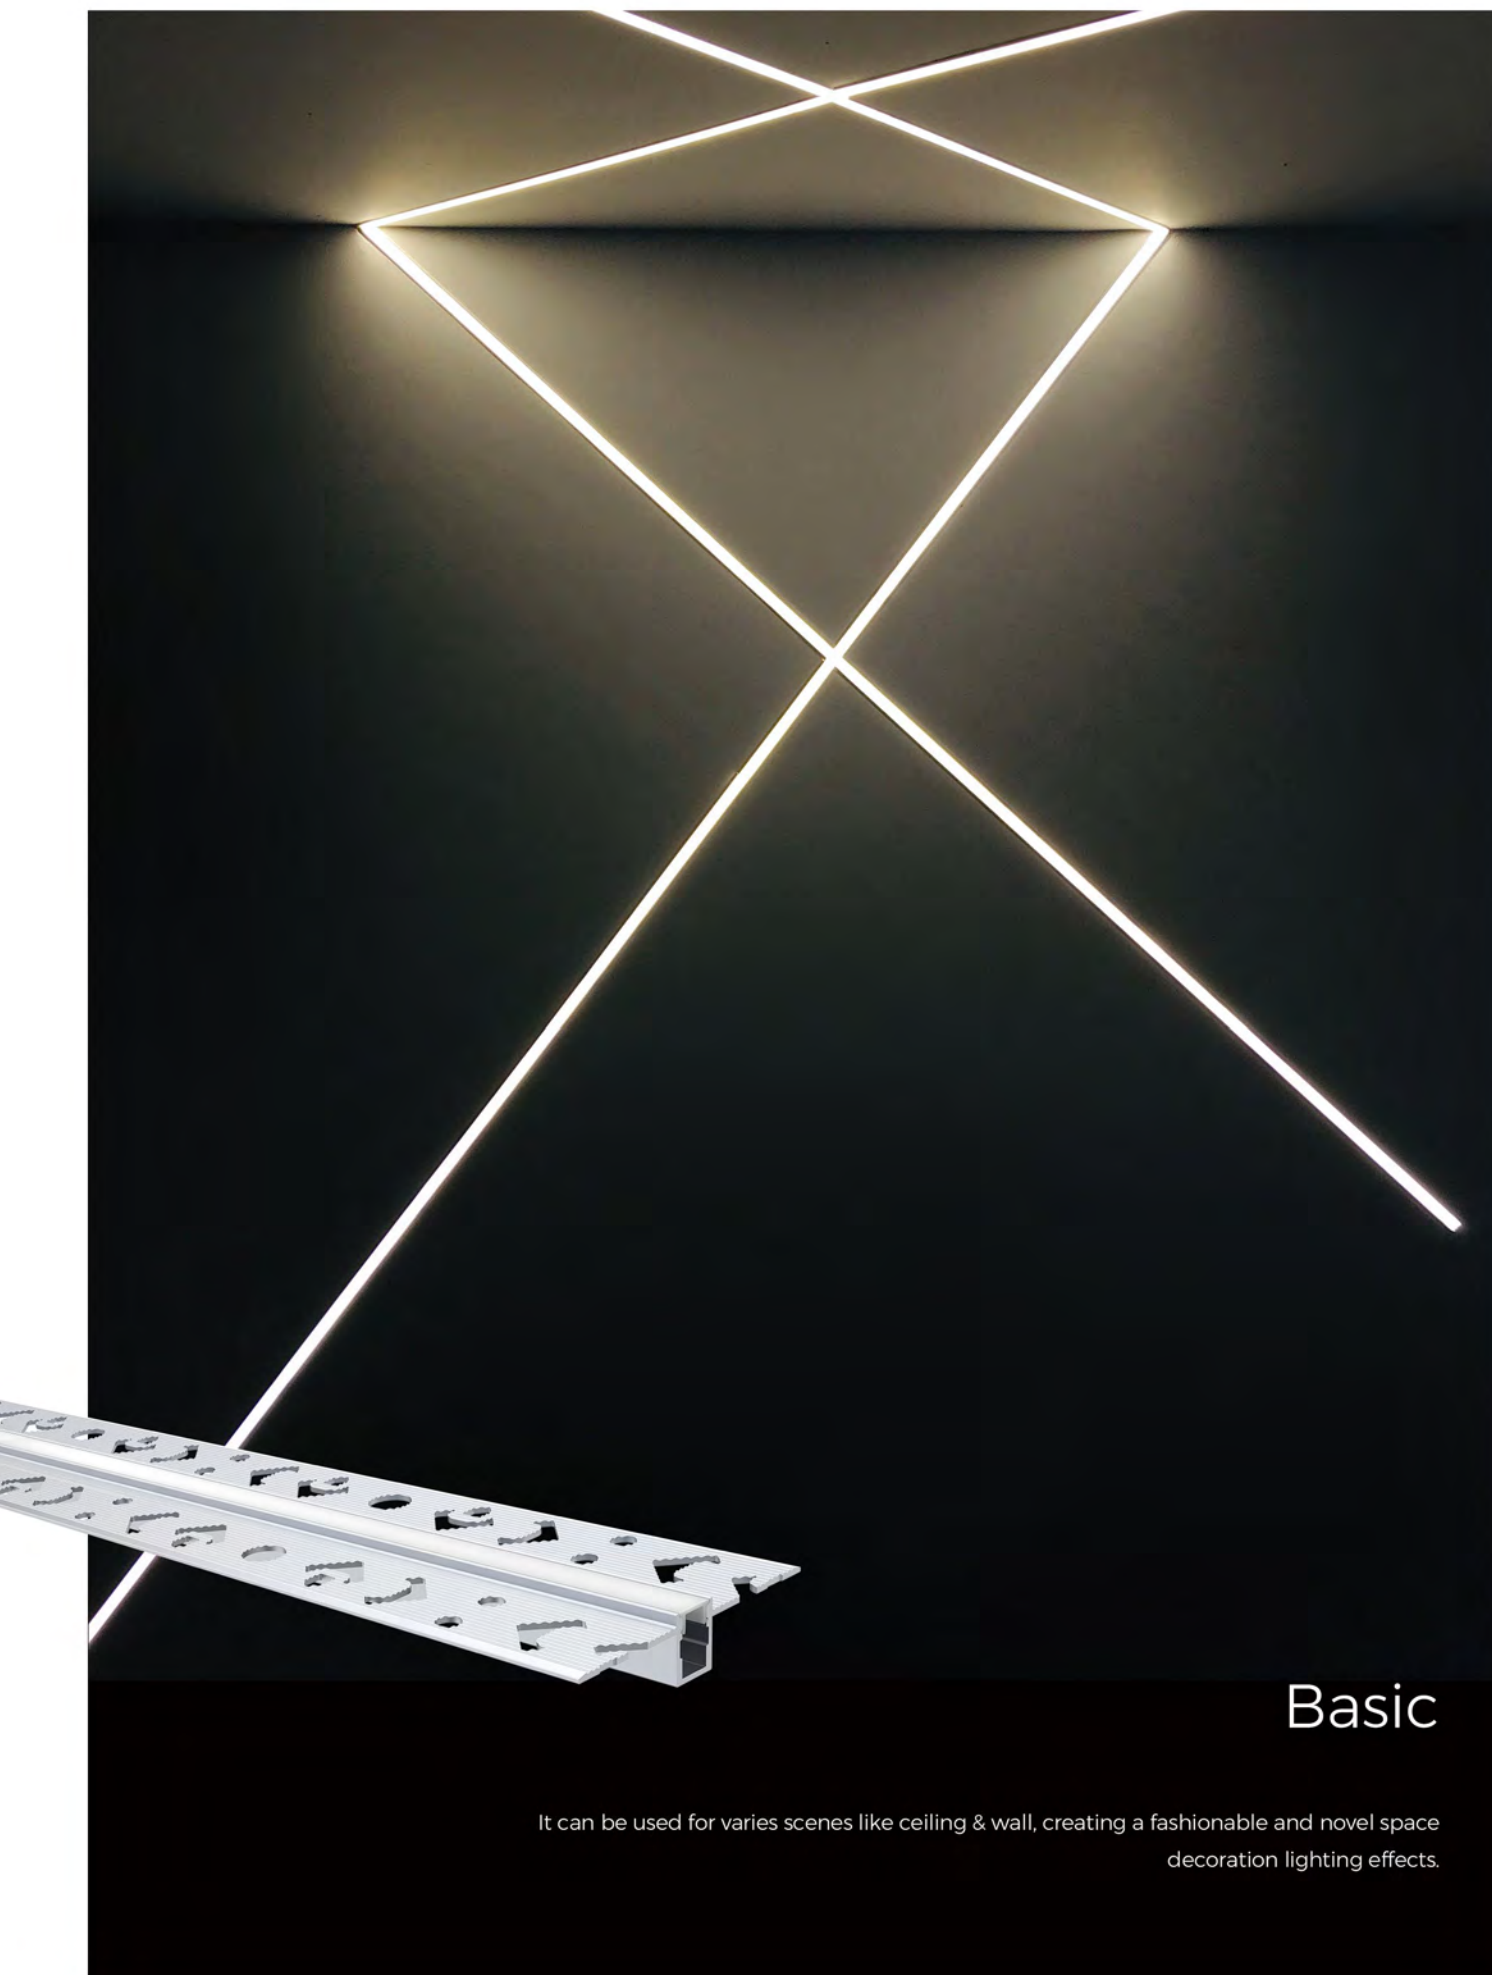


SEL-LS0510

- Ultimate slim with 3.4mm luminous surface
- Flexible in a variety of narrow spaces for outlining & decorating
- AL6063-T5 aluminum profile + silicone neon strip, making it extremely
- convenient to install and maintain the light source
- Applicable to indoor damp environments



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing
LED Strip	Silicone neon
IP grade	IP54

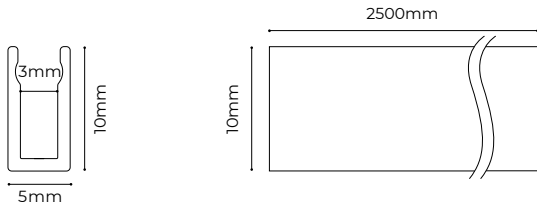

Profile


Profile	L2500 W5 H10mm
---------	----------------

Lighting Source

Silicone neon strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
NPS0409	>90	70LM/m	24V	5W/m	5000x4x9mm	140LEDs	50mm/7LEDs



ð The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type											
ALS	-	Gap Lighting	LS	OS10	No Diffuser	X	No Diffuser	X	No carrier	X	Silver	S	No end cap	X	2500	-	SEL Whole	B	SEL	C										
																													Customized	S
ALS	-					LS		OS10				X							X		X		S		X	2500	-		B	

Ordering profile components SEL-ALS-LS0510XXXSX2500-BC 🔍


SEL-LS0709

- Super narrow and thin, applicable to small spaces
- "Dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- End cap in close-fitting design without screws

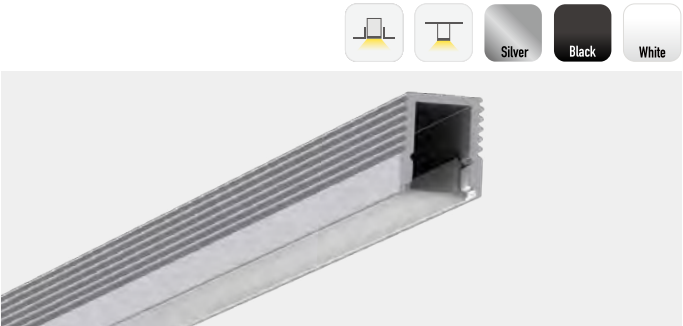

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☐ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 9.6W/m
Transmittance	>55%

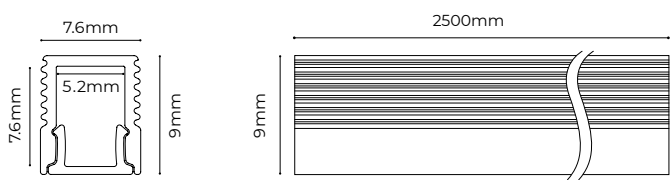

Profile Components


Profile	L2500 W7.6 H9mm	
Diffuser	L2500 W6.4 H3.7mm	
Black Diffuser	L2500 W6.4 H3.7mm	
End cap	EC-LS0709FSS L3 W7.6 H9mm	

Installation Accessories

Mounting clip	CP-03 L15 W9.7 H4.5mm	
---------------	--------------------------	--


Lighting Source

Flexible Strip ①							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000 W 4 1.2mm	120LEDs	6LEDs/50mm



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 5mm, power within 10W/m.

Ū The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Pendant Mounted	LS	0709	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
													3000K	WW			SEL Individual	D	Customized	S											
													4000K	NW																	
													6000K	W																	
DLS	-		LS	0709	F		D		X		S				S	2500	-		F	09		SW		9		X	-		D		C
DLS	-		LS	0709	F		D		X		S				S	2500	-									-		B		C	

Ordering profile components SEL-DLS-LS0709FDXSS2500-BC 🔍 Ordering luminaires kits SEL-DLS-LS0709FDXSS2500-F09SW9X-DC 🔍


SEL-LS0812

- Super narrow and thin, applicable to small spaces
- "Dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 10W/m
Transmittance	>55%

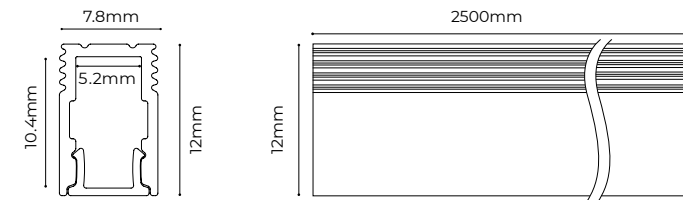

Profile Components


Profile A 1	L250.0 Å W7.8 Å H12mm	
Diffuser A 1	L250.0 Å W6.4 Å H3.7mm	
Black Diffuser A 1	L250.0 Å W6.4 Å H3.7mm	
End cap A 2	EC-LS0812FSS L8 Å W7.8 Å H12mm	
End cap with hole x2	EC-LS0812FSD L8 Å W7.8 Å H12mm	

Installation Accessories

Mounting clip CP-03
L15 W9.7 H4.5mm


Lighting Source

Flexible Strip ①							
Model	CRI	Lumens/Ů	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000Å 4 1.2mm	120LEDs	6LEDs/50mm



✎ Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 5mm, power within 10W/m.

Ů The luminous flux is the testing result of 4000K product.

**Ordering Code**


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Pendant Mounted	LS	0812	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
									Single end with hole			H									3000K	WW						SEL Individual	D	Customized	S
									Double end with hole			D									4000K	NW									
																					6000K	W									
DLS	-		LS	0812		F		D		X		S		S	2500	-		F		09		SW		9		X	-		D		C
DLS	-		LS	0812		F		D		X		S		S	2500	-										-		B			

Ordering profile components (SEL-DLS-LS0812FDXSS2500-BC)

Ordering luminaires kits (SEL-DLS-LS0812FDXSS2500-F09SW9X-DC)


SEL-LE1212

- Super narrow, applicable to a variety of small spaces
- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes

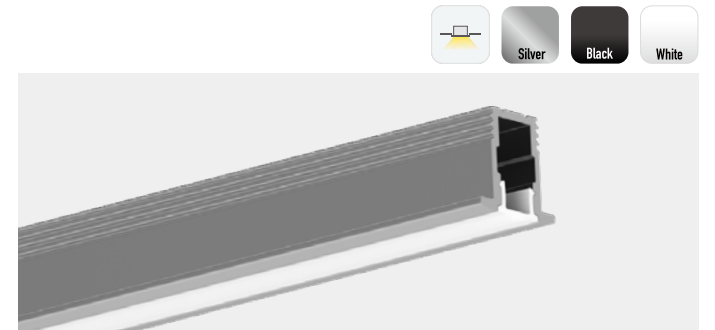

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 
	Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 12W/m
Transmittance	>55%

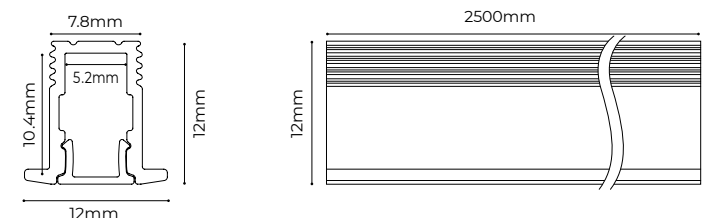

Profile Components


Profile A 1	L2500 A W12 A H12mm	
Diffuser A 1	L2500 A W6.4 A H3.7mm	
Black Diffuser A 1	L2500 A W6.4 A H3.7mm	
End cap A 2	EC-LE1212FSS L12 A W12 A H10mm	
End cap with hole x2	EC-LE1212FSD L12 A W12 A H10mm	

Installation Accessories

Mounting clip	CP-11 25 × 13 × 9.5mm	
---------------	--------------------------	---


Lighting Source

Flexible Strip ①							
Model	CRI	Lumens Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000Å 4.12mm	120LEDs	6LEDs/50mm
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 5mm, power within 12W/m.

Ů The luminous flux is the testing result of 4000K product.

**Ordering Code**

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Recessed N with trim	LE	1212	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	86W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW					SEL Individual	D	Customized	S	
											White	W	Double end with hole	D							4000K	NW									
													6000K	W																	
DLS	-		LE	1212		F		D		X	S		S	2500	-		F		09		SW		9			X	-		D		C
DLS	-		LE	1212		F		D		X	S		S	2500	-											-			B		C

Ordering profile components (SEL-DLS-LE1212FDXSS2500-BC) ☐

Ordering luminaires kits **(SEL-DLS-LE1212FDXSS2500-F09SW9X-DC)**


SEL-LR0812

- 8mm luminous surface, trimless recessed design,integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting end cap design without screw, make installation more convenient



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>55%

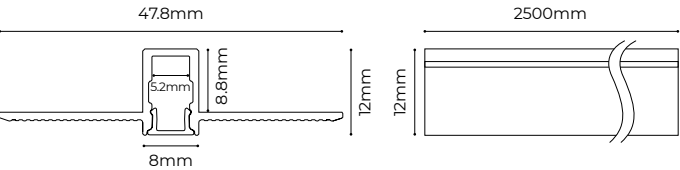

Profile Components

Profile A 1	L2500 A W47.8 A H12mm	
Diffuser A 1	L2500 A W6.4 A H3.7mm	
Black Diffuser A 1	L2500 A W6.4 A H3.7mm	
End cap A 2	EC-LS0812FSS L8 A W7.8 A H12mm	
End cap with hole X2	EC-LS0812FSD L8 A W7.8 A H12mm	


Lighting Source

Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000Å 4 1.2mm	120LEDs	6LEDs/50mm	
								

Installation Accessories

Screw	CL-01	M3.5	40mm	
-------	-------	------	------	--

- Recommended light source, to ensure the best heat dissipation / lighting effect / life span
- The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type		
ALS	-	Trimless Recessed	LR	0812	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C		
													Single end with hole	H							Customized	S
													Double end with hole	D								
ALS	-		LR	0812		F		D		X		S		S	2500	-		B		C		

Ordering profile components


SEL-LS1607

- Super slim, applicable to a variety of small spaces
- "Dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes
- Optional fixed clips for light angel adjustment as you wish

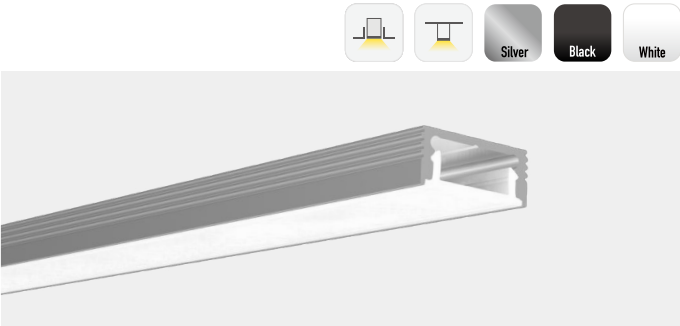

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 13W/m
Transmittance	>60%

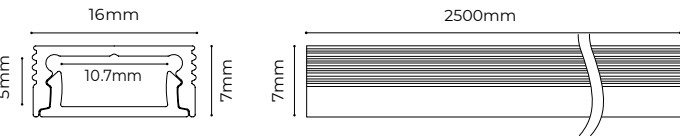

Profile Components

Profile 1	L2500 W16 H7mm	
Diffuser 1	L2500 W14.7 H4.5mm	
Microprism Diffuser 1	L2500 W14.7 H4.3mm	
Black Microprism Diffuser 1	L2500 W14.7 H4.3mm	
End cap 2	EC-LS1607FSS L6 W16 H7mm	
End cap with hole 2	EC-LS1607FSD L6 W16 H7mm	

Installation Accessories

Mounting clip	CP-04	17.8	15	4.5mm	
0-180°adjustable mounting clip	CP-06	35	17	21.4mm	
0-90°adjustable mounting clip	CP-21	20	20	9mm	

Ordering Code


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Pendant Mounted	LS	1607	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	13W/m	T3	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW						SEL Individual	D	Customized	S
											White	W	Double end with hole	D							4000K	NW									
																					6000K	W									
DLS	-		LS	1607	F		D		X		S		S	2500	-		F		T3		SW		9		X	-		D		C	
DLS	-		LS	1607	F		D		X		S		S	2500	-													B		C	

Ordering profile components


Ordering luminaires kits

SEL-LS1613

- "Dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end cap with or without holes
- Optional fixed clips for light angel adjustment as you wish

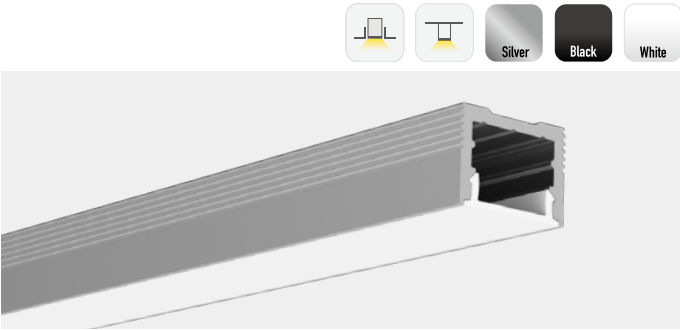

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 14W/m
Transmittance	>60%

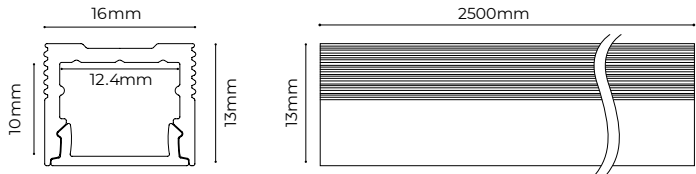

Profile Components	
Profile 1	L2500 16 W16 H13mm
Diffuser 1	L2500 16 W14.7 H4.5mm
Microprism Diffuser 1	L2500 16 W14.7 H4.3mm
Black Microprism Diffuser 1	L2500 16 W14.7 H4.3mm
End cap 2	EC-LS1613FSS L 16 W16 H13mm
End cap with hole 2	EC-LS1613FSD L 16 W16 H13mm


Installation Accessories	
Mounting clip	CP-04 17.8 15 4.5mm
0-180°adjustable mounting clip	CP-06 35 17 21.4mm
0-90°adjustable mounting clip	CP-21 20 20 9mm

Lighting Source

Flexible Strip ①

Model	CRI	Lumens Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-8mm	λ 90	710LM/m	24V	8.6W/m	5000 8 1.2mm	120LEDs	6LEDs/50mm
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 12.4mm, power within 14W/m.
- Ū The luminous flux is the testing result of 4000K product.




Ordering Code																																
Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature			Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
DLS	-	Pendant Mounted	LS	1613	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C	
											Black	B	Single end with hole	H							3000K	WW						SEL Individual	D	Customized	S	
											White	W	Double end with hole	D							4000K	NW										
																					6000K	W										
DLS	-		LS	1613		F		D		X		S		S	2500	-		F		09		SW		9		X	-		D		C	
DLS	-		LS	1613		F		D		X		S		S	2500	-										-		B		C		


Ordering profile components Ordering luminaires kits

SEL-LE2507

- Super-slim recessed, perfectly fitting with space carrier
- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes

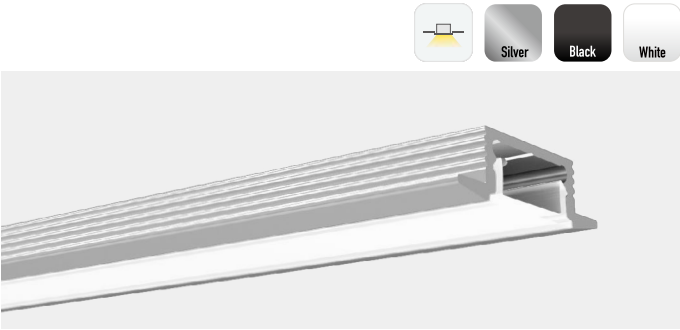

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 13W/m
Transmittance	>60%




Profile Components	
Profile 1	L2500 16 W25 H7mm
Diffuser 1	L2500 16 W14.6 H4.5mm
Microprism Diffuser 1	L2500 16 W14.7 H4.3mm
Black Microprism Diffuser 1	L2500 16 W14.7 H4.3mm
End cap 2	EC-LE2507FSS L25 16 W16 H10mm
End cap with hole 2	EC-LE2507FSD L25 16 W16 H10mm

Lighting Source

Flexible Strip ①

Model	CRI	Lumens Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6300-24V-8mm	λ 90	1134LM/m	24V	13W/m	5000 8 1.2mm	300LEDs	6LEDs/20mm

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 10.7mm, power within 13W/m.
- Ū The luminous flux is the testing result of 4000K product.




Ordering Code																															
Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
DLS	-	Recessed N with trim	LE	2507	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	13W/m	13	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW						SEL Individual	D	Customized	S
											White	W	Double end with hole	D							4000K	NW									
																					6000K	W									
DLS	-		LE	2507		F		D		X		S		S	2500	-		F	13		SW		9			X	-		D		C
DLS	-		LE	2507		F		D		X		S		S	2500	-											-		B		C


Ordering profile components Ordering luminaires kits

SEL-LE2513

- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes
- Easy and efficient installation with recessed clips

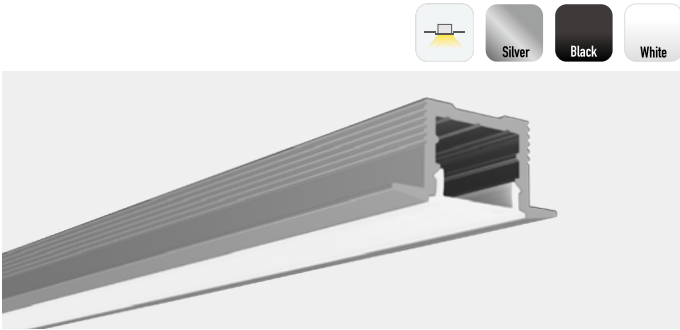

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>60%

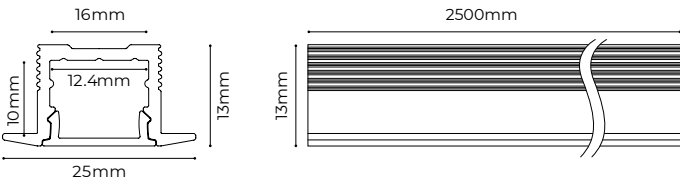


Profile Components		
Profile	L2500	W25
Diffuser	L2500	W147
Microprism Diffuser	L2500	W147
Black Microprism Diffuser	L2500	W147
End cap	EC-LE2513FSS	L25
End cap with hole	EC-LE2513FSD	L25

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-8mm	>90	710LM/m	24V	8.6W/m	5000	120LEDs	6LEDs/50mm
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000	120LEDs	50mm/6LEDs

δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 12.4mm, power within 15W/m.

Ū The luminous flux is the testing result of 4000K product.

Installation Accessories	
Mounting clip	CP-12 25



Ordering Code																															
Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Recessed N with trim	LE	2513	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW						SEL Individual	D	Customized	S
											White	W	Double end with hole	D							4000K	NW									
																					6000K	W									
DLS	-		LE	2513	F		D		X		S		S	2500	-		F		09		NW		9		X	-		D		C	
DLS	-		LE	2513	F		D		X		S		S	2500	-										-		B		C		


Ordering profile components Ordering luminaires kits

SEL-LR1613

- 16mm luminous surface, trimless recessed design, integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting end cap design without screw, make installation more convenient



Basic Parameters	
Profile material	AL6063-T5
Surface processing	Anodizing ☒
Diffuser material	PC
Transmittance	>60%

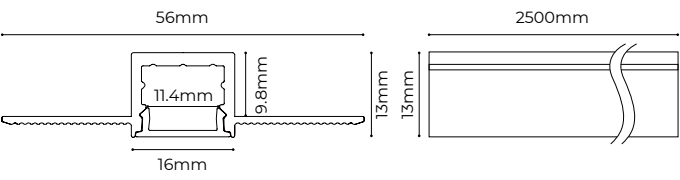


Profile Components		
Profile	L2500	W56
Diffuser	L2500	W147
Microprism Diffuser	L2500	W147
Black Microprism Diffuser	L2500	W147
End cap	EC-LS1613FSS	L7
End cap with hole	EC-LS1613FSD	L7

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000	120LEDs	50mm/6LEDs
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000	120LEDs	50mm/6LEDs

δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span

Ū The luminous flux is the testing result of 4000K product.

Installation Accessories	
Screw	CL-01 M3.5




Ordering Code																						
Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type		
ALS	-	Trimless Recessed	LR	1613	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C		
										Single end with hole		H	Customized	S								
										Double end with hole		D										
ALS	-		LR	1613		F		D		X		S		S	2500	-		B		C		

Ordering profile components


SEL-LS2013

- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany

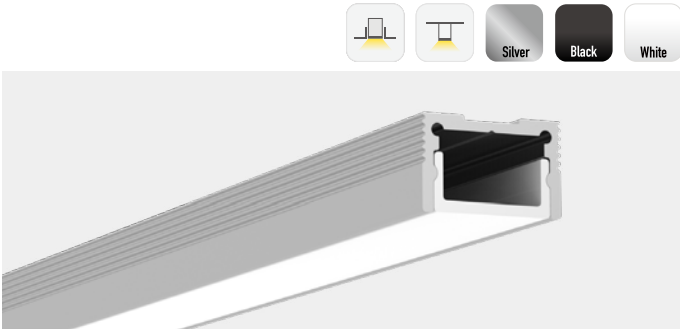

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>60%

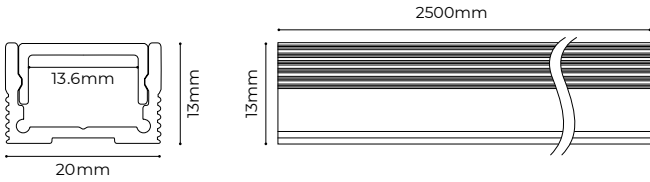

Profile Components


Profile	L250 0Å W20 Å H13mm	
Diffuser	L250 0Å W16.7 Å H7.8mm	
Microprism Diffuser	L250 0Å W16.7 Å H7.8mm	
Black Microprism Diffuser	L250 0Å W16.7 Å H7.8mm	
End cap	EC-LS2013FSS L25 Å W13 Å H11mm	
End cap with hole	EC-LS2013FSD L25 Å W13 Å H11mm	

Installation Accessories


Clips	CP-08	21.8X12X6.4mm	
-------	-------	---------------	--

Lighting Source

Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	50.00x10x1.2mm	280LEDs	50mm/14LEDs	



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 12.4mm, power within 15W/m.
Ů The luminous flux is the testing result of 4000K product.



Ordering Code


Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power		CCT	CRI		Power Type		-	Package		Label Type					
DLS	-	Pendant Mounted	LS	2013	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H				3000K	WW							SEL Individual	D	Customized	S		
											White	W	Double end with hole	D				4000K	NW												
																		6000K	W												
DLS	-		LS	2013	F		D		X		S		S	2500	-		F	15		NW		9		X	-		D		C		
DLS	-		LS	2013	F		D		X		S		S	2500	-									-		B		C			

Ordering profile components

Ordering luminaires kits


SEL-LS2020

- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes
- Easy and efficient installation with recessed clips

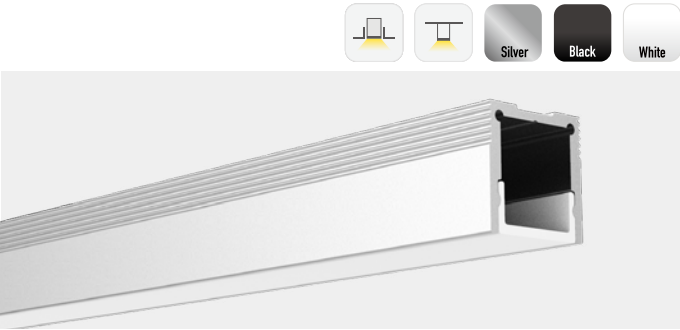

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>60%

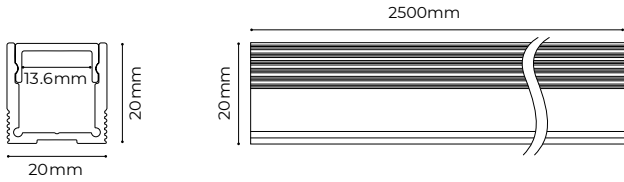

Profile Components


Profile	L2500	W20	H20mm		
Diffuser	L2500	W16.7	H7.8mm		
Microprism Diffuser	L2500	W16.7	H7.8mm		
Black Microprism Diffuser	L2500	W16.7	H7.8mm		
End cap	EC-LS2020FSS	L25	W13	H11mm	
End cap with hole	EC-LS2020FSD	L25	W13	H11mm	

Installation Accessories


Clips	CP-08	21.8X12X6.4mm	
-------	-------	---------------	--

Lighting Source

Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	50.00x10x1.2mm	280LEDs	50mm/14LEDs	



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 12.4mm, power within 15W/m.
Ů The luminous flux is the testing result of 4000K product.



Ordering Code


Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	-	Light Source Type	Light Source Power		CCT	CRI		Power Type		-	Package		Label Type				
DLS	-	Pendant Mounted	LS	2020	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H					3000K	WW						SEL Individual	D	Customized	S		
											White	W	Double end with hole	D					4000K	NW											
																			6000K	W											
DLS	-		LS	2020	F		D		X		S		S	2500	-		F	15		NW		9		X	-		D		C		
DLS	-		LS	2020	F		D		X		S		S	2500	-									-		B		C			

Ordering profile components

Ordering luminaires kits

SEL-LR2013

- 20mm luminous surface, trimless recessed design, integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment

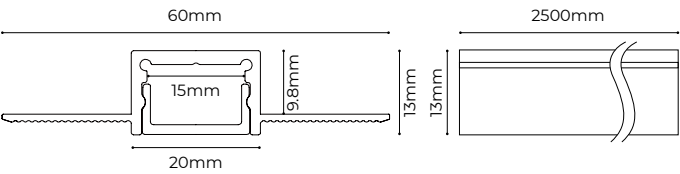

Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>60%

Profile Components


Profile 1	L250 0 0 W60 0 H13mm	
Diffuser 1	L250 0 0 W16.7 0 H7.8mm	
Microprism Diffuser 1	L250 0 0 W16.7 0 H7.8mm	
Black Microprism Diffuser 1	L250 0 0 W16.7 0 H7.8mm	
End cap 2	EC-LS2013FSS L20 0 W13 0 H4.5mm	
End cap with hole 2	EC-LS2013FSD L20 0 W13 0 H4.5mm	

Installation Accessories


Screw	CL-01 M3.5 0 40mm	
-------	----------------------	--

Lighting Source

Flexible Strip 0								
Model	CRI	Lumens 0	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	50 00x10x1.2mm	280LEDs	50mm/14LEDs	



- 0 Recommended light source, to ensure the best heat dissipation / lighting effect / life span
- 0 The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type									
ALS	-	Trimless Recessed	LR	2013	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C									
																							Single end with hole	H				Customized	S
																								Double end with hole	D				
ALS	-		LR	2013		F		D		X		S		S	2500	-		B		C									

Ordering profile components

SEL-LR3735

- 35mm luminous surfaceP trimless recessed design, integrated into architecture
- AL6063-T5 aluminum profile with high-quality surface treatment
- Indirect lighting design

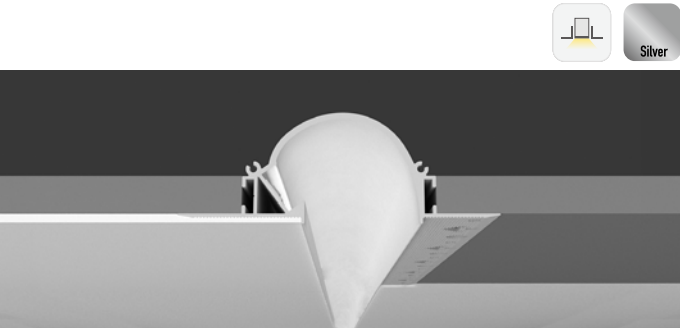

Basic Parameters


Profile material	AL6063-T5
Surface processing	Spraying RAL9003

Profile Components

Profile 1	L250 0 0 W99 0 H35mm	
End cap 2	EC-LR3735XWS L59.8 0 W35 0 H2mm	

Installation Accessories

Screw	CL-01 M3.5 0 40mm	
-------	----------------------	--

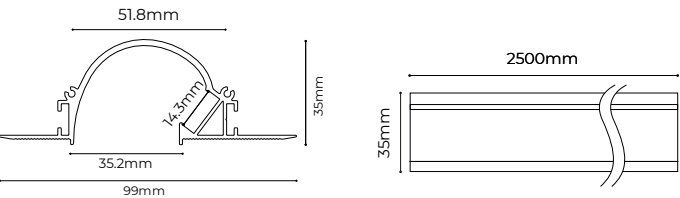


Lighting Source

Flexible Strip 0								
Model	CRI	Lumens 0	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	50 00x10x1.6mm	168LEDs	42mm/7LEDs	



- 0 Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
- 0 The luminous flux is the testing result of 4000K product.





Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Trimless Recessed	LR	3735	No Diffuser	X	No Diffuser	X	No carrier	X	White	W	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
																			Customized	S
ALS	-		LR	3735		X		X		X		W		S	2500	-		B		C

Ordering profile components

SEL-LR3924

- 35mm luminous surfaceP trimless recessed design, integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment

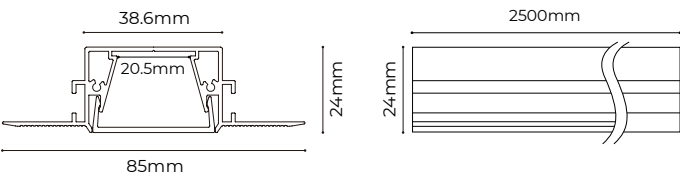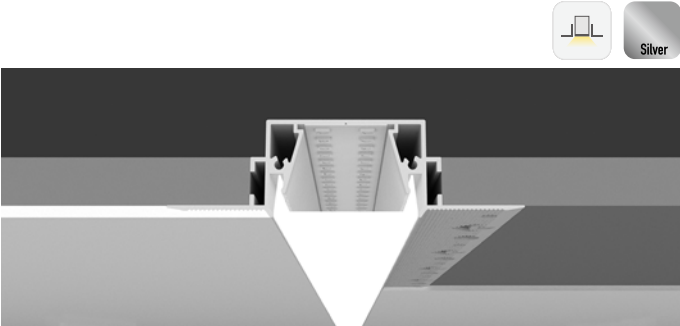

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>70%

Profile Components		
Profile 1	L2500 W85 H24mm	
Diffuser 1	L2500 W342 H10.2mm	
End cap 2	EC-LR3924FSS L38.6 W24 H2mm	


Installation Accessories		
Screw	CL-01 M3.5 40mm	

Lighting Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	>80 >95	2700LM/M 2300LM/M	24V	20W/M	2500x20x1.5mm	280LEDs	50mm/14LEDs

δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ū The luminous flux is the testing result of 4000K product.





Ordering Code																					
Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Trimless Recessed	LR	3924	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C	
																			Customized	S	
ALS	-		LR	3924		F		D		X		S		S	2500	-		B		C	

Ordering profile components

SEL-ALS-LR3924FDXSS2500-BC

SEL-LR10324

- 100mm large luminous surfaceP trimless recessed design, integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment

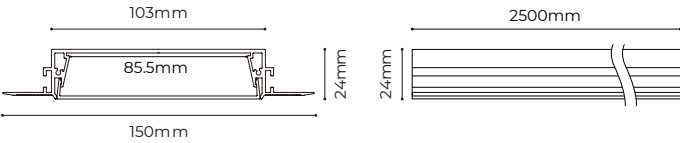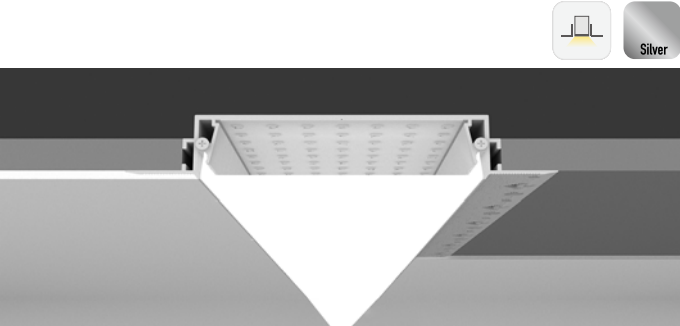

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>75%

Profile Components		
Profile 1	L2500 W150 H24mm	
Diffuser 1	L2500 W977 H10mm	
End cap 2	EC-LR10324FSS L103 W24 H2mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	

Lighting Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8560-24V-85mm	>80 >95	5050LM/M 4300LM/M	24V	40W/M	2500x85x1.5mm	560LEDs	50mm/28LEDs




δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ū The luminous flux is the testing result of 4000K product.



Ordering Code																						
Category		-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Trimless Recessed	LR	10324	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C		
																					Customized	S
ALS	-		LR	10324		F		D		X		S		S	2500	-		B		C		

Ordering profile components

SEL-ALS-LR10324FDXSS2500-BC

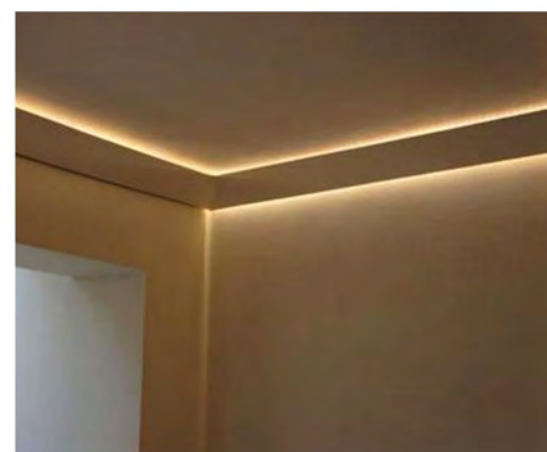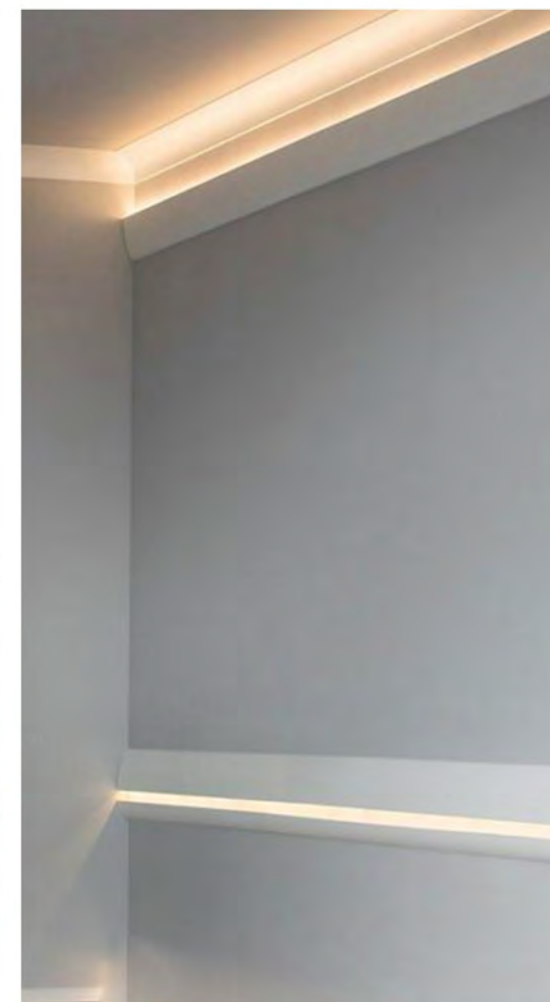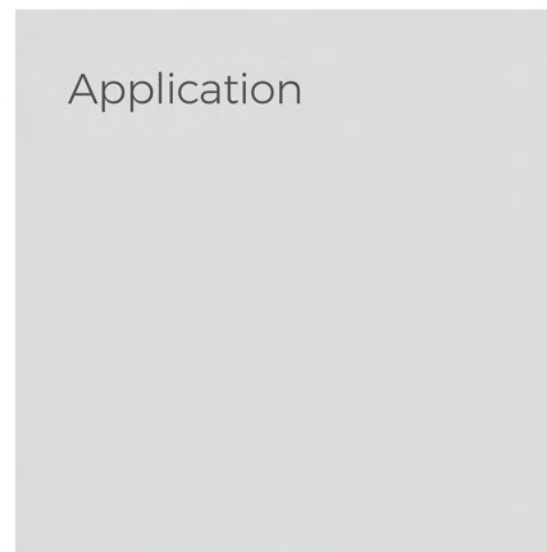


SEL-LG7043

- Apply to gypsum lines, integrated into architecture
- Arc cover design, wider luminous surface
- Detachable clasp design, easy to install
- AL6063-T5 aluminum profile with high-quality surface treatment



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing ●
Diffuser material	PC
Transmittance	>70%

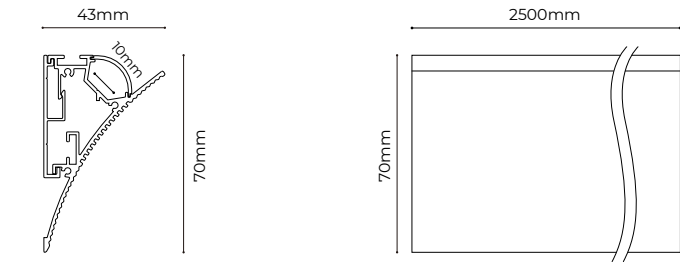


Profile Components

Profile 1	L2500 4 W43 H70mm	
Diffuser 1	L2500 4 W18.9 H6.5mm	
End cap 2	EC-LG7043CSS L70 4 W43 H2mm	

Lighting Source

Model	CRI	LumensŰ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs




Installation Accessories

Screw	CL-01 M3.5 40mm
-------	--------------------



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ű The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Gypsum Lighting	LG	7043	Curve	C	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
																		Customized	S	
ALS	-		LG	7043		C		D		X		S		S	2500	-		B		C

Ordering profile components SEL-ALS-LG7043CDXSS2500-BC


SEL-LG7070

- Apply to gypsum lines, integrated into architecture
- Double light emitting, can be used for ceiling, wall lighting decoration effect
- Arc cover design, wider luminous surface
- Detachable clasp design, easy to install
- AL6063-T5 aluminum profile with high-quality surface treatment

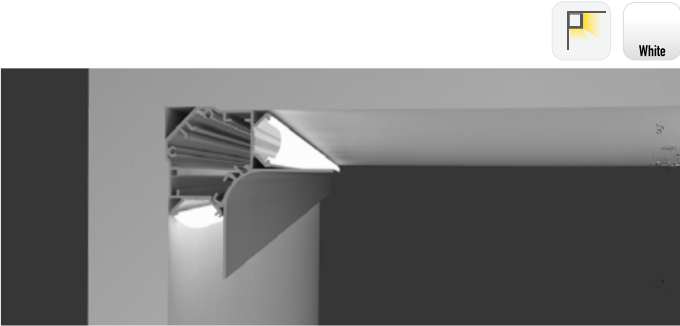

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ○
Diffuser material	PC
Transmittance	>70%

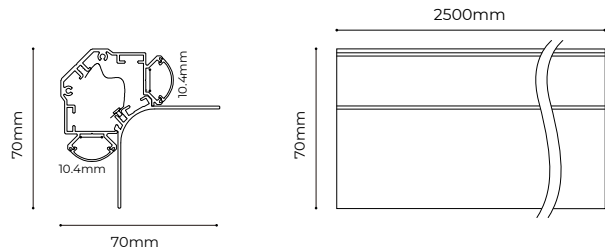


Profile Components

Profile 1	L2500 4 W70 H70mm	
Diffuser 1	L2500 4 W18.9 H6.5mm	
End cap 2	EC-LG7070CWS L70 4 W70 H2mm	

Lighting Source

Model	CRI	LumensŰ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs




Installation Accessories

Screw	CL-01 M3.5 40mm
-------	--------------------






ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ű The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type										
ALS	-	Gypsum Lighting	LG	7070	Curve	C	Diffuser	D	No carrier	X	White	W	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C	Customized	S
ALS	-		LG	7070		C		D		X	W		S	2500	-		B		C			

Ordering profile components SEL-ALS-LG7070CDXWS2500-BC

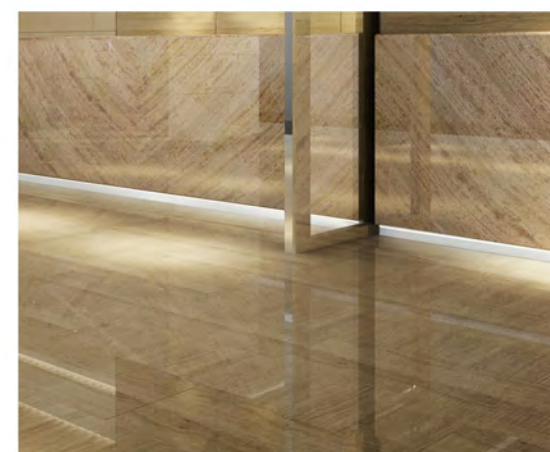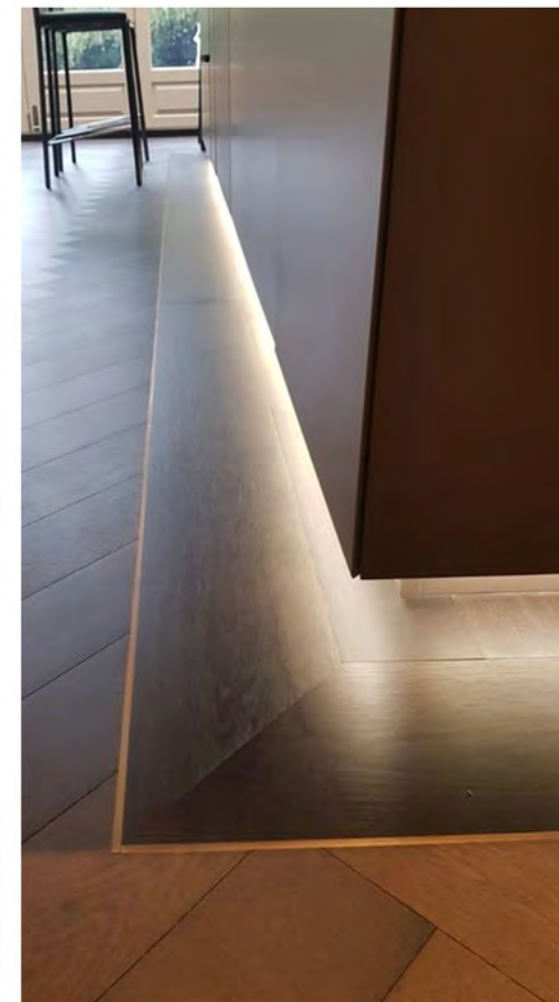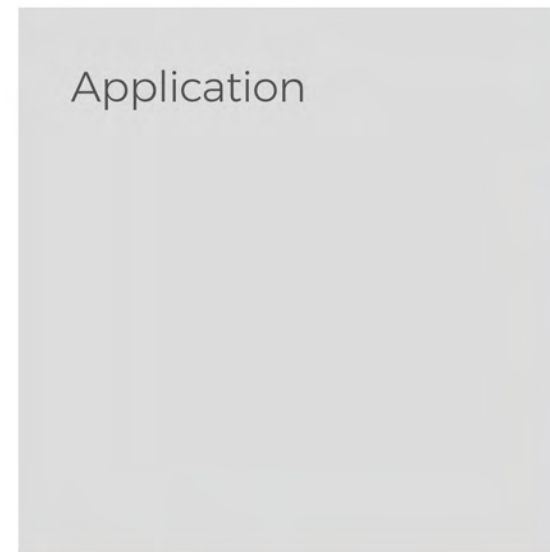


SEL-LG8513

- Apply to gypsum lines, integrated into architecture
- Double light emitting, can be used for ceiling, wall lighting decoration effect
- Arc cover design, wider luminous surface
- Detachable clasp design, easy to install
- AL6063-T5 aluminum profile with high-quality surface treatment



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Anodizing ☒
Diffuser material	PC
Transmittance	>70%

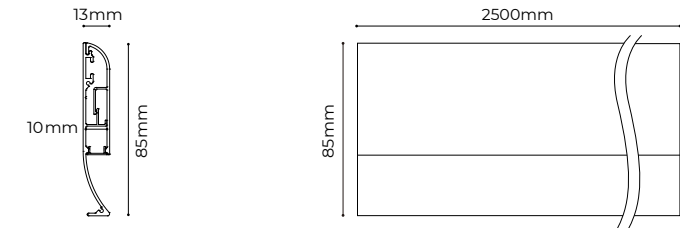

Profile Components

Profile 1	L2500 13mm W13 H85mm	
Diffuser 1	L2500 13mm W10 H41mm	
End cap 2	EC-LG8513FSS L85 13mm W13 H1.5mm	


Installation Accessories

Screw	CL-01 M3.5 20mm	
-------	--------------------	--

Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320 LM/M	24V	13.5W/M	5000x8x1.6mm	120 LEDs	50mm/6 LEDs
D6120-24V-8mm	>90	710 LM/M	24V	8.6W/M	5000x8x1.2mm	120 LEDs	50mm/6 LEDs

- δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
- Ū The luminous flux is the testing result of 4000K product.

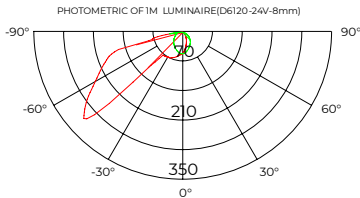

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Skirt Lighting	LG	8513	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
											White	W							Customized	S
ALS	-		LG	8513		F		D		X		S		S	2500	-		B		C





Ordering profile components



Floor Lighting

IK10, IP65 waterproof level design, can be widely used in indoor and outdoor floors, sidewalks, bicycle lanes, parking lots and other scenes.

Application

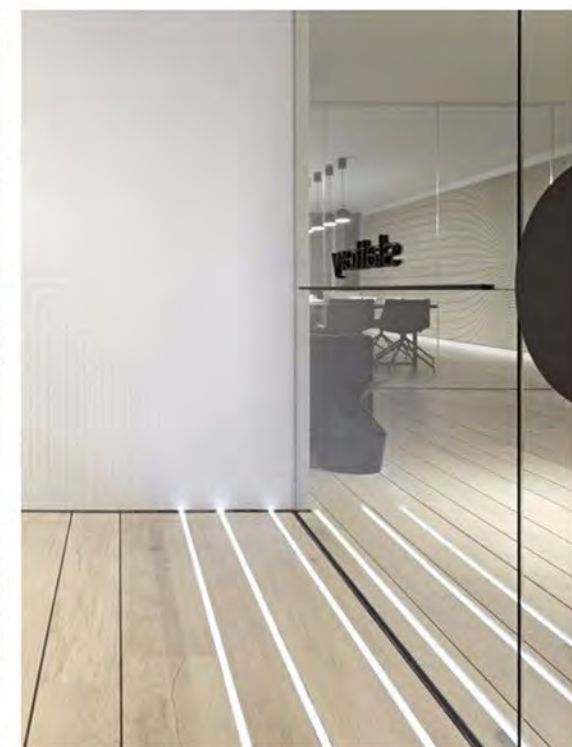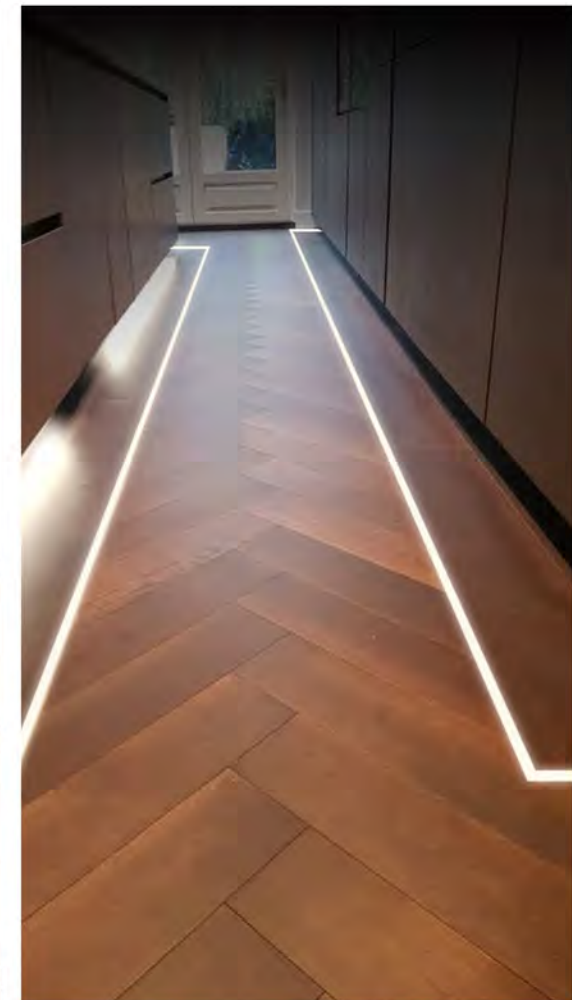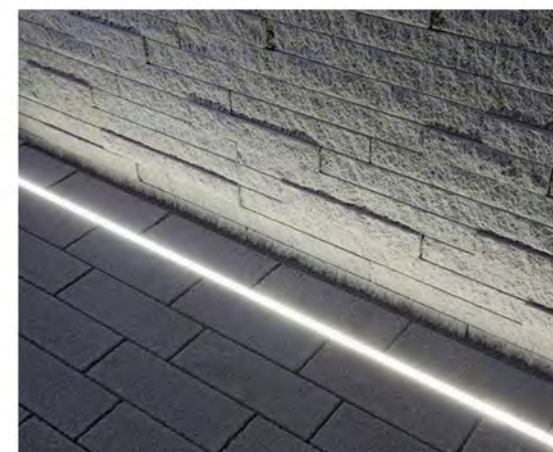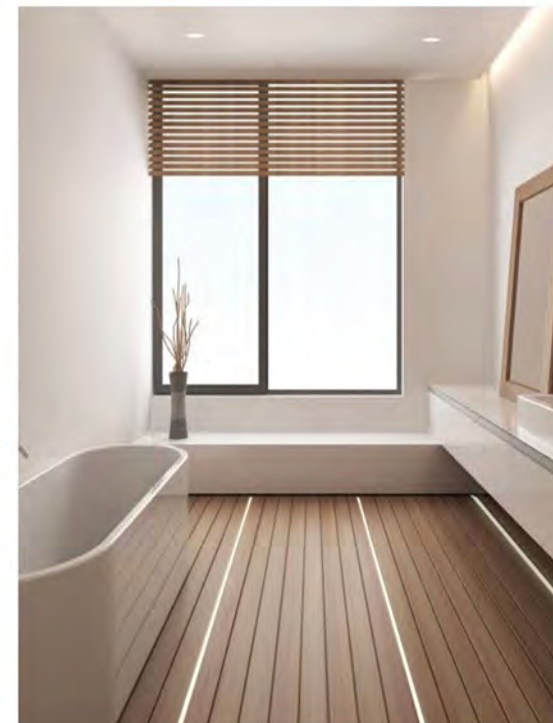


SEL-LS2126

- AL6063-T5 aluminum profile with high-quality surface treatment
- "Dot-free" lighting source producing homogeneous & soft lights
- IK10 ☿ IP65 waterproof level designP can be used widely in indoor and outdoor floors



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing ●
Diffuser material	PC
Transmittance	>75%

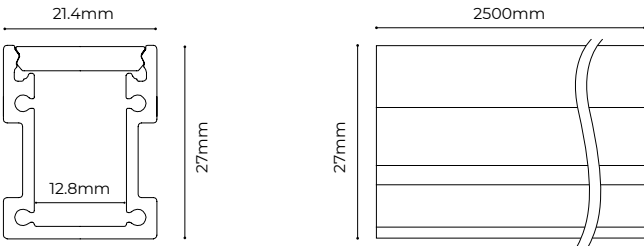


Profile Components

Profile	L2500 Å W21.4 Å H27mm	
Diffuser	L2500 Å W18 Å H3.4mm	
End cap	EC-LS2126FSS L27 Å W21.4 Å H5mm	
End cap with hole	EC-LS2126FSD L27 Å W21.4 Å H5mm	

Lighting Source

Flexible Strip							
Model	CRI	LumensŪ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs

☿ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ū The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type		
ALS	-	Floor Lighting	LS	2126	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C	
													Single end with hole	H						Customized	S
													Double end with hole	D							
ALS	-		LS	2126		F		D		X		S		S	2500	-		B		C	

Ordering profile components SEL-ALS-LS2126FDXSS2500-BC 🔍


SEL-LE2711

- AL6063-T5 aluminum profile with high-quality surface treatment
- "Dot-free" lighting source producing homogeneous & soft lights
- IK10 ☿ IP65 waterproof level designP can be used widely in indoor and outdoor floors

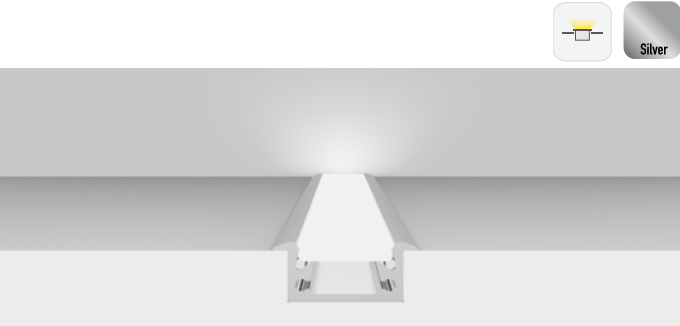

Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing ●
Diffuser material	PC
Transmittance	>75%

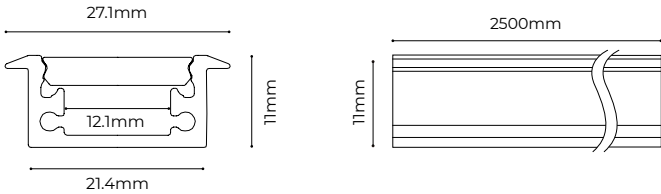


Profile Components

Profile	L2500 Å W27 Å H11mm	
Diffuser	L2500 Å W18 Å H3.4mm	
End cap	EC-LE2711FSS L27.2 Å W1 Å H7.8mm	
End cap with hole	EC-LE2711FSD L27.2 Å W1 Å H7.8mm	

Lighting Source

Flexible Strip							
Model	CRI	LumensŪ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	42mm/7LEDs

☿ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ū The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type									
ALS	-	Floor Lighting	LE	2711	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C	
													Single end with hole	H						Customized	S
													Double end with hole	D							
ALS	-		LE	2711		F		D		X	S		S	2500	-		B		C		



Ordering profile components SEL-ALS-LE2711FDXSS2500-BC 🔍



Corner Lighting

We integrate the light into the inner and outer corners of the wall, perfectly integrate with the building, and realize the scene application of local space decorative lighting.

Application

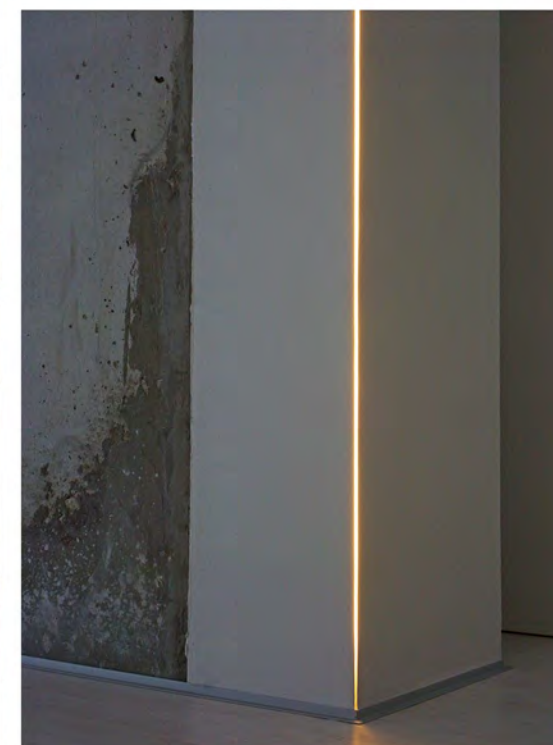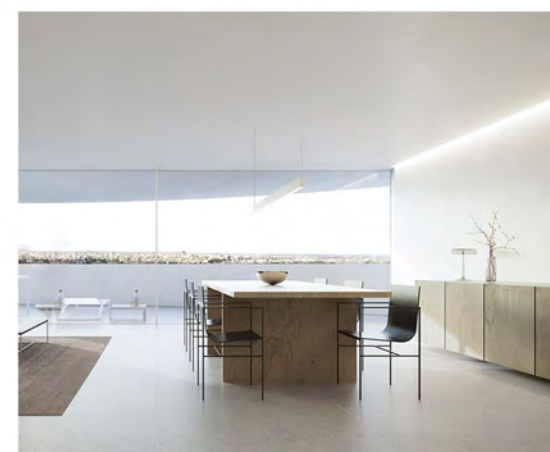


SEL-LG2323

- Apply to outer corner of wall edges and integrated into the wall by embedded design
- Only 8mm luminous surface outlining the decorative effects in a slim and exquisite manner
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>55%

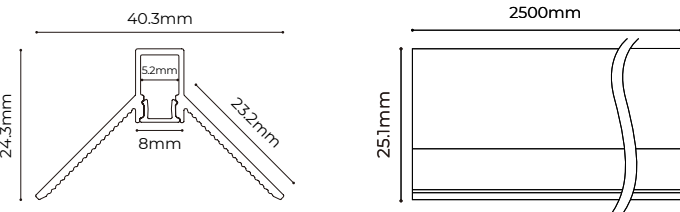

Profile Components

Profile A 1	L250 0A W40.3A H24.3mm	
Diffuser A 1	L250 0A W6.4A H3.7mm	
Black Diffuser A 1	L250 0A W6.4A H3.7mm	
End cap A 2	EC-LS0812FSS L8A W7.8A H12mm	
End cap with hole X2	EC-LS0812FSD L8A W7.8A H12mm	


Lighting Source

Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000	4	1.2mm	120LEDs 6LEDs/50mm

Installation Accessories

Screw	CL-01	M3.5	40mm	
-------	-------	------	------	--

- δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
- Ū The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type								
ALS	-	Corner Lighting	LG	2323	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
													Single end with hole	H					Customized	S
													Double end with hole	D						
ALS	-		LG	2323		F		D		X		S		S	2500	-		B		C

Ordering profile components SEL-ALS-LG2323FDXSS2500-BC Q


SEL-LG2727

- Apply to outer corner of wall edges and integrated into the wall by embedded design
- Only 8mm luminous surface outlining the decorative effects in a slim and exquisite manner
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient



Basic Parameters

Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>55%

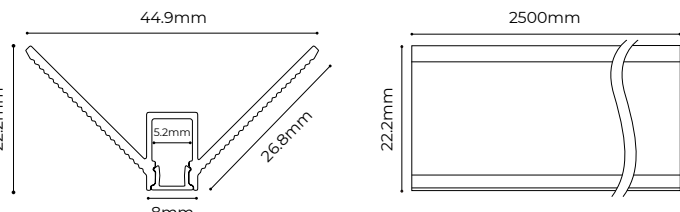

Profile Components

Profile 1	L2500 W44.9 H22.2mm	
Diffuser 1	L2500 W6.4 H3.7mm	
Black Diffuser 1	L2500 W6.4 H3.7mm	
End cap 2	EC-LS0812FSS L8 W7.8 H12mm	
End cap with hole x2	EC-LS0812FSD L8 W7.8 H12mm	


Lighting Source

Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000	4	1.2mm	120LEDs 6LEDs/50mm

Installation Accessories

Screw	CL-01	M3.5	40mm	
-------	-------	------	------	--

- δ Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
- Ū The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type								
ALS	-	Corner Lighting	LG	2727	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
													Single end with hole	H					Customized	S
													Double end with hole	D						
ALS	-		LG	2727		F		D		X		S		S	2500	-		B		C

Ordering profile components SEL-ALS-LG2727FDXSS2500-BC Q


SEL-LG1616C

- Designed in a right angle b fit in different wall corners
- Domed lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 13W/m
Transmittance	>70%

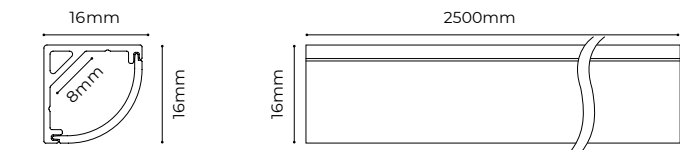

Profile Components

Profile	L2500Å W16Å H16mm	
Diffuser	L2500Å W19.4Å H6mm	
End cap	EC-LG1616CSS L16Å W16Å H6.5mm	
End cap with holeX2	EC-LG1616CSD L16Å W16Å H6.5mm	


Lighting Source

Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-8mm	λ 90	710LM/m	24V	8.6W/m	5000Å	8Å 1.2mm	120LEDs	6LEDs/50mm
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm		120LEDs	50mm/6LEDs

Installation Accessories

Mounting clip	CP-13 15Å 17Å 17mm	
---------------	-----------------------	--

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 8mm, power within 13W/m.
- Ū The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power		CCT	CRI	Power Type		-	Package	Label Type							
DLS	-	Linear Angle	LG	1616	Curve	C	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H				3000K	WW			SEL Individual	D	Customized	S						
											White	W	Double end with hole	D				4000K	NW												
																		6000K	W												
DLS	-		LG	1616		C		D		X	S			S	2500	-		F	09		SW		9		X	-		D		C	
DLS	-		LG	1616		C		D		X	S			S	2500	-									-		B		C		

Ordering profile components (SEL-DLS-LG1616CDXSS2500-BC) Ordering luminaires kits (SEL-DLS-LG1616CDXSS2500-F09SW9X-DC)


SEL-LG1616K

- Designed in a right angle b fit in different wall corners
- Double-side lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 13W/m
Transmittance	>70%

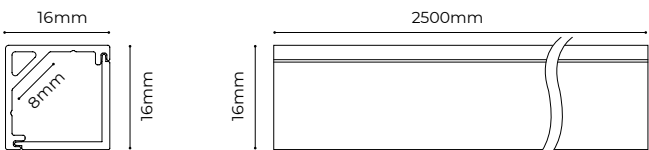

Profile Components

Profile	L2500Å W16Å H16mm	
Diffuser	L2500Å W14.6Å H14.6mm	
End cap	EC-LG1616KSS L16Å W16Å H6.5mm	
End cap with holeX2	EC-LG1616KSD L16Å W16Å H6.5mm	


Lighting Source

Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-8mm	λ 90	710LM/m	24V	8.6W/m	5000Å	8Å 1.2mm	120LEDs	6LEDs/50mm
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm		120LEDs	50mm/6LEDs

Installation Accessories

Mounting clip	CP-13 15Å 17Å 17mm	
---------------	-----------------------	--

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 8mm, power within 13W/m.
- Ū The luminous flux is the testing result of 4000K product.




Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
DLS	-	Linear Angle	LG	1616	Square	K	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.6W/m	09	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW					SEL Individual	D	Customized	S	
											White	W	Double end with hole	D							4000K	NW									
																					6000K	W									
DLS	-		LG	1616		K		D		X	S			S	2500	-		F		09		SW		9		X	-		D		C
DLS	-		LG	1616		K		D		X	S			S	2500	-										-		B		C	

Ordering profile components (SEL-DLS-LG1616KDXSS2500-BC) Ordering luminaires kits (SEL-DLS-LG1616KDXSS2500-F09SW9X-DC)


SEL-LG3030C

- Designed in a right angle b fit in different wall corners
- Domed lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole

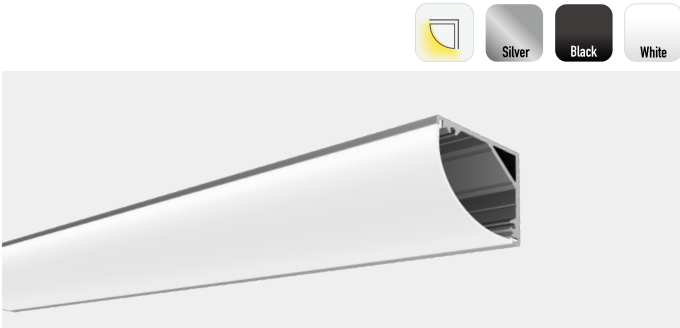

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>85%

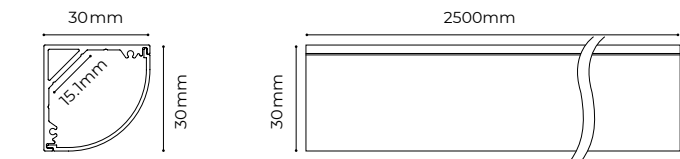

Profile Components

Profile	L2500Å W30Å H30mm	
Diffuser	L2500Å W29.2Å H29.2mm	
End cap	EC-LG3030CSS L30Å W30Å H5mm	
End cap with hole	EC-LG3030CSD L30Å W30Å H5mm	


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	λ 90	1508LM/m	24V	15W/m	5000Å 10Å 1.2mm	280LEDs	14LEDs/50mm

Installation Accessories

Mounting clip	CP-14 31Å 31Å 14mm	
---------------	-----------------------	--

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 15mm, power within 15W/m.
- Ů The luminous flux is the testing result of 4000K product.



Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power		CCT	CRI	Power Type		-	Package		Label Type						
DLS	-	Linear Angle	LG	3030	Curve	C	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H				3000K	WW								SEL Individual	D	Customized	S	
											White	W	Double end with hole	D				4000K	NW												
																		6000K	W												
DLS	-		LG	3030		C		D		X		S		S	2500	-		F	15		SW		9		X	-		D		C	
DLS	-		LG	3030		C		D		X		S		S	2500	-									-		B		C		

Ordering profile components (SEL-DLS-LG3030CDXSS2500-BC)

Ordering luminaires kits (SEL-DLS-LG3030CDXSS2500-F15SW9X-DC)


SEL-LG3030K

- Designed in a right angle b fit in different wall corners
- Double-side lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>85%

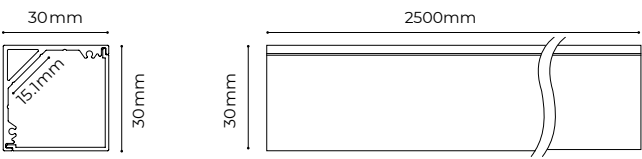

Profile Components

Profile	L2500Å W30Å H30mm	
Diffuser	L2500Å W29.2Å H29.2mm	
End cap	EC-LG3030KSS L30Å W30Å H5mm	
End cap with hole	EC-LG3030KSD L30Å W30Å H5mm	


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	λ 90	1508LM/m	24V	15W/m	5000Å 10Å 1.2mm	280LEDs	14LEDs/50mm

Installation Accessories

Mounting clip	CP-14 31Å 31Å 14mm	
---------------	-----------------------	--

- ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 15mm, power within 15W/m.
- Ů The luminous flux is the testing result of 4000K product.






Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
DLS	-	Linear Angle	LG	3030	Square	K	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H							3000K	WW					SEL Individual	D	Customized	S	
											White	W	Double end with hole	D							4000K	NW									
																					6000K	W									
DLS	-		LG	3030		K		D		X		S		S	2500	-		F		15		SW		9		X	-		D		C
DLS	-		LG	3030		K		D		X		S		S	2500	-										-		B			C

Ordering profile components (SEL-DLS-LG3030KDXSS2500-BC)

Ordering luminaires kits (SEL-DLS-LG3030KDXSS2500-F15SW9X-DC)

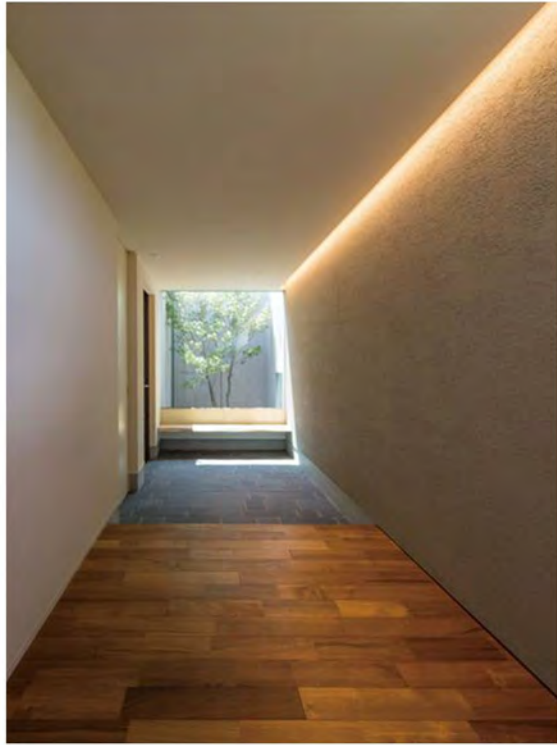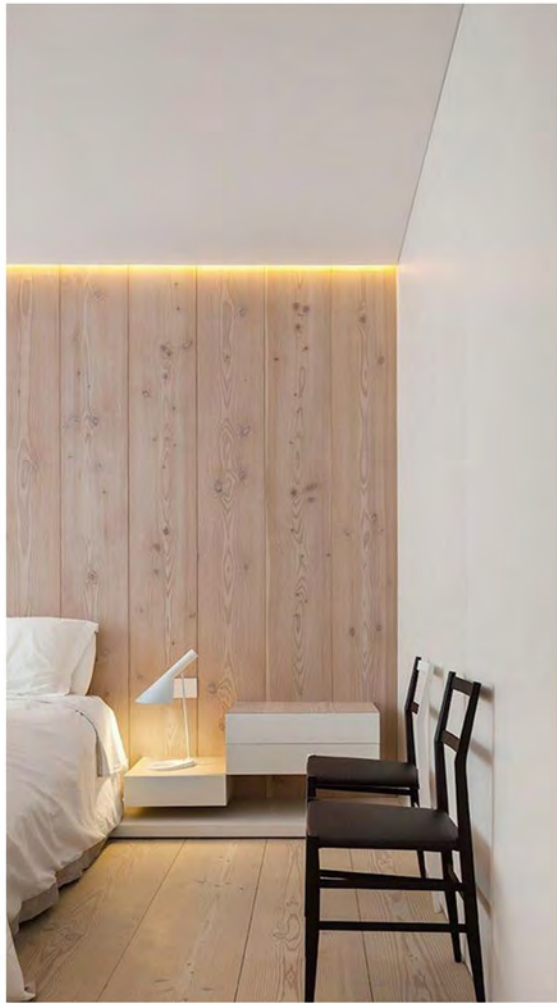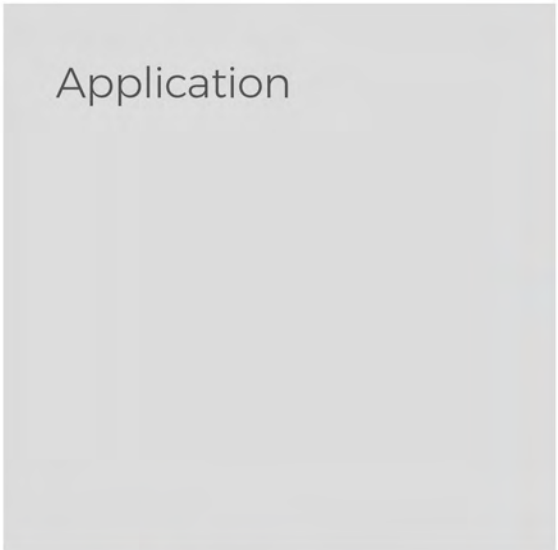


SEL-LE1616

- Apply to the edge of ceiling to achieve the lighting effect of washing walls
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>85%

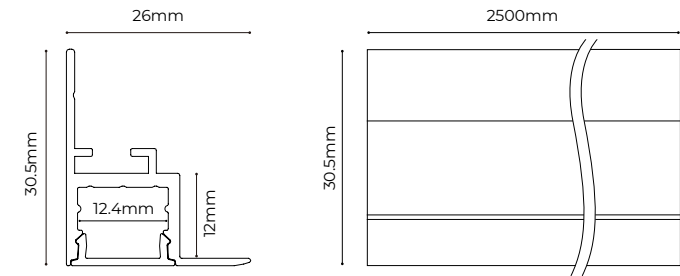

Profile Components		
Profile	L2500 W26 H30.5mm	
Diffuser	L2500 W14.7 H4.5mm	
Microprism Diffuser	L2500 W16.7 H7.8mm	
Black Microprism Diffuser	L2500 W16.7 H7.8mm	
End cap	EC-LS1613FSS L7 W16 H13mm	
End cap with hole	EC-LS1613FSD L7 W16 H13mm	

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs

ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ű The luminous flux is the testing result of 4000K product.



Ordering Code																					
Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Edge Lighting	LE	1616	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C	
													Single end with hole	H					Customized	S	
													Double end with hole	D							
ALS	-		LE	1616		F		D		X		S		S	2500	-		B		C	

Ordering profile components 🔍


SEL-LR1616



- Apply to the edge of ceiling to achieve the lighting effect of washing walls
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Embedded design, integrated with architecture
- AL6063-T5 aluminum profile with high-quality surface treatment




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>85%

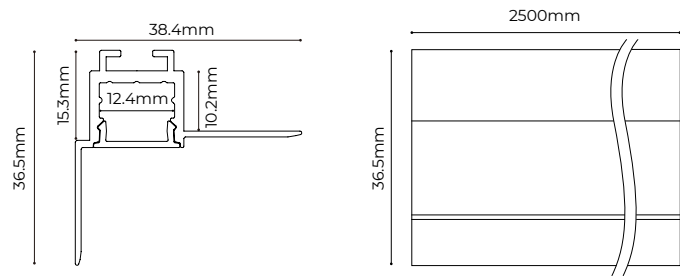

Profile Components		
Profile	L2500 W38.4 H36.5mm	
Diffuser	L2500 W14.7 H4.5mm	
Microprism Diffuser	L2500 W16.7 H7.8mm	
Black Microprism Diffuser	L2500 W16.7 H7.8mm	
End cap	EC-LS1613FSS L7 W16 H13mm	
End cap with hole	EC-LS1613FSD L7 W16 H13mm	



Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>90	1320LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs

ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
Ű The luminous flux is the testing result of 4000K product.




Ordering Code																				
Category	-	Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Package		Label Type	
ALS	-	Edge Lighting	LR	1616	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	SEL Whole	B	SEL	C
										Single end with hole		H	Customized	S						
										Double end with hole		D								
ALS	-		LR	1616		F		D		X		S		S	2500	-		B		C

Ordering profile components 🔍

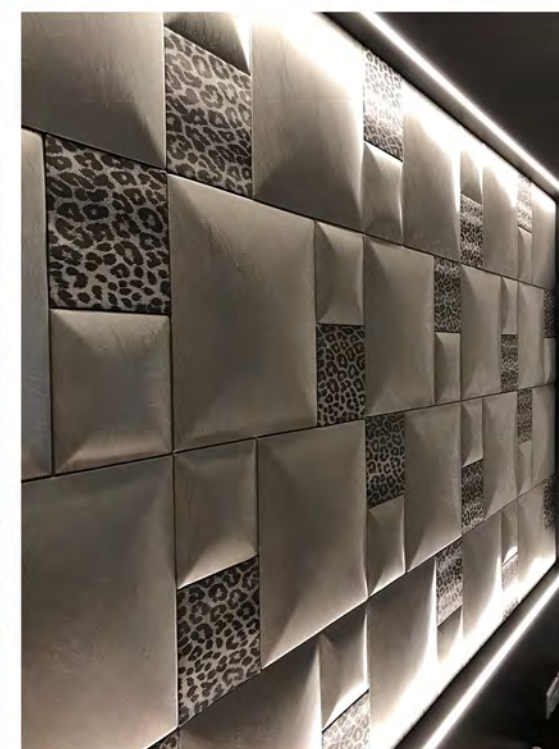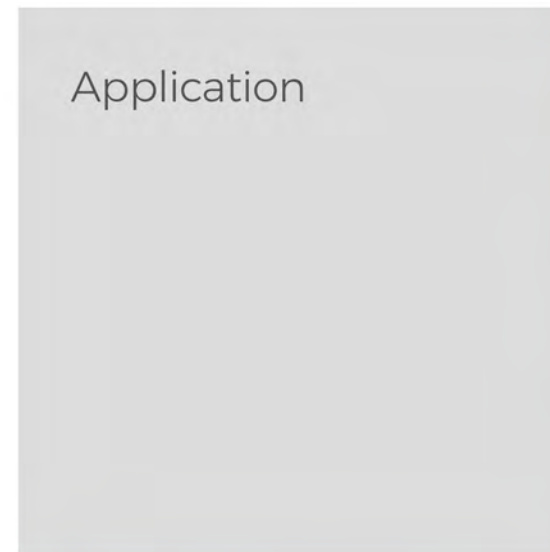


SEL-LE2409

- Super slim, applicable to a variety of small spaces
- "Dot-free" lighting source producing homogeneous & soft slant lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes

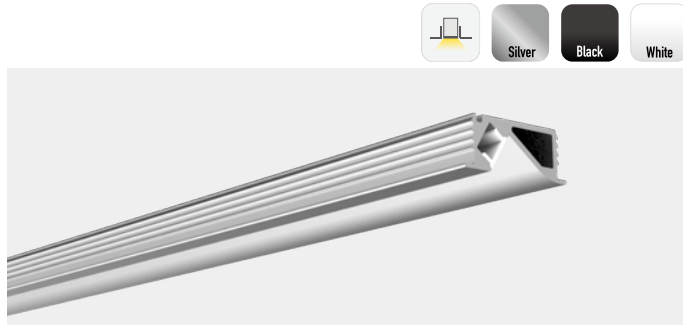


Basic Parameters

Profile material	AL6063-T5	
Surface processing	Spraying RAL9003  Spraying RAL9005 	Anodizing 
Diffuser material	PC	
Heat dissipation capability	Max 13W/m	
Transmittance	>60%	

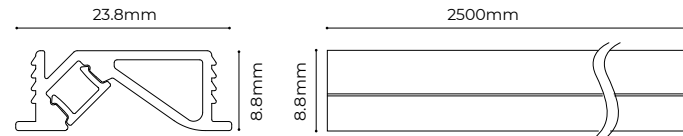

Profile Components


Profile 1	L2500 W23.8 H8.8mm	
Diffuser 1	L2500 W6.4 H2.8mm	
End cap with hole 2	EC-LE2409FXH L23.8 W8.8 H13.3mm	



Lighting Source


Flexible Strip ①

Model	CRI	Lumens/Ů	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6120-24V-4mm	λ 90	710LM/m	24V	8.6W/m	5000Å 4.12mm	120LEDs	6LEDs/50mm



ð Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 5.7mm, power within 13W/m.

Ű The luminous flux is the testing result of 4000K product.

**Ordering Code**

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
DLS	-	Recessed N with trim	LE 2409	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	8.3W/M	9	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
								Black	B	Single end with hole	H		3000K	WW						3000K	WW					SEL Individual	D	Customized	S	
								White	W	Double end with hole	D		4000K	NW						4000K	NW									
													6000K	W						6000K	W									
DLS	-		LE 2409		F		D		X	S		S	2500	-			F		9		NW		9		X	-		D		C
DLS	-		LE 2409		F		D		X	S		S	2500	-											-		B			

Ordering profile components (SEL-DLS-LE2409FDXSS2500-BC)

Ordering luminaires kits SEL-DLS-LE2409FDXSS2500-F9NW9X-DC


SEL-LS1612L

- By changing the position of the carrier, a variety of beam angles of 20°/40°/60°/80° can be achieved
- AL6063-T5 aluminum profiles with high quality surface treatment and three optional colors of black, white and silver
- Close-fitting design without screws, optional end caps with or without holes



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 14W/m
Transmittance	>85%

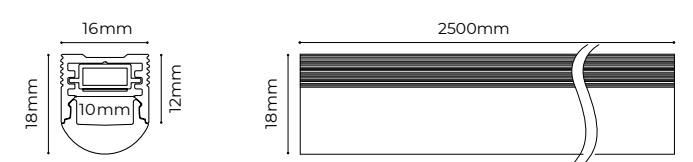

Profile Components

Profile A 1	L2500 A W16 A H12mm	
Diffuser A 1	L2500 A W147 A H45mm	
End cap A 2	EC-LS1612LSS L16 A W7 A H18mm	
End cap with hole A 2	EC-LS1612LSD L16 A W7 A H18mm	




Installation Accessories

Mounting clip	CP-04 17.8Å 15Å 4.5mm	
0-180°adjustable mounting clip	CP-06 35Å 17.7Å 21.4mm	
0-90°adjustable mounting clip	CP-21 20Å 20Å 9mm	



Ö Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 10mm, power within 14W/m.

Ŭ The luminous flux is the testing result of 4000K product.

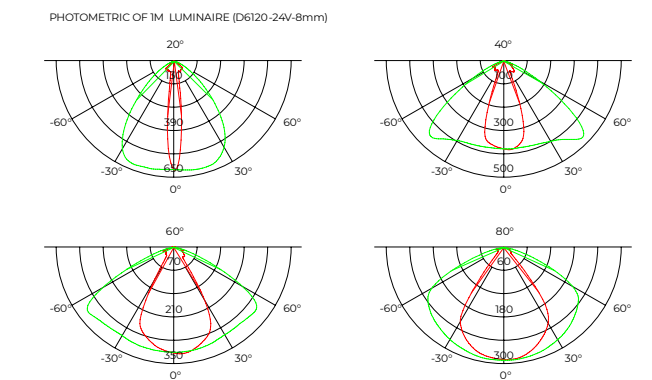**Ordering Code**


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
DLS	-	Pendant Mounted	LS	1612	Prism	L	Transparent	T	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	14W/m	14	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C	
											Black	B	Single end with hole	H							3000K	WW						SEL Individual	D	Customized	S	
											White	W	Double end with hole	D							4000K	NW										
																					6000K	W										
DLS	-		LS	1612		L		T		F		S		S	2500	-			F		13		SW		9		X	-		D		C
DLS	-		LS	1612		L		T		F		S		S	2500	-											-		B		C	

Ordering profile components (SEL-DLS-LS1612LTFSS2500-BC)

Ordering luminaires kits (SEL-DLS-LS1612LTFSS2500-F14SW9X-DC)


SEL-LS1911K

- Three-side lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole
- Free & flexible connection

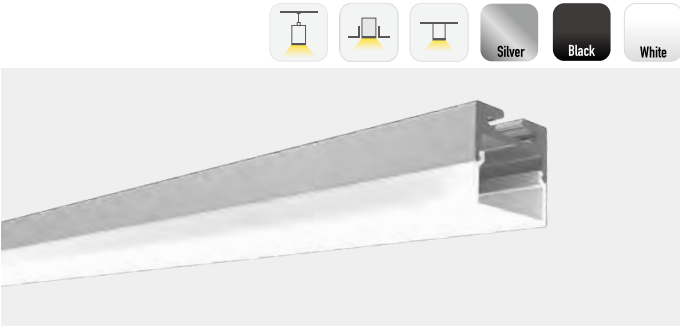

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>85%

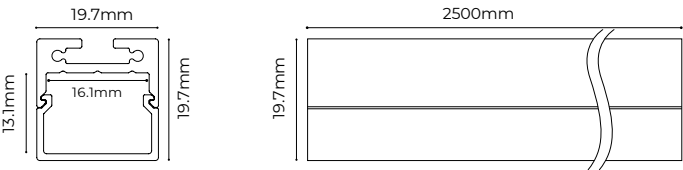

Profile Components

Profile	L2500Å W19.7Å H11.1mm	
Diffuser	L2500Å W19.7Å H10.6mm	
End cap	EC-LS1911KSS L19.7Å W19.7Å H5mm	
End cap with hole	EC-LS1911KSD L19.7Å W19.7Å H5mm	

Installation Accessories

Mounting clip	CP-07 38Å 15Å 4.5mm	
Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	
Pendant cable (Wire and line in one)	PN-EAX 2m/4m	


Standard extenders

180°/"L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	
---	---	--

Lighting Source

Flexible Strip ①							
Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter
D6280-24V-10mm	λ 90	1508LM/m	24V	15W/m	5000Å 10Å 1.2mm	280LEDs	14LEDs/50mm

ø Recommended light source, to ensure the best heat dissipation / lighting effect / life span, customer can freely select LED strip of width within 16mm, power within 15W/m.
Ū The luminous flux is the testing result of 4000K product.



Ordering Code


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
DLS	-	Pendant Mounted	LS	1911	Square	K	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
							Black	B	Single end with hole	H			3000K	WW			SEL Individual	D	Customized	S											
							White	W	Double end with hole	D			4000K	NW																	
													6000K	W																	
DLS	-		LS	1911		K		D		X	S				S	2500	-		F	15		SW		9		X	-		D		C
DLS	-		LS	1911		K		D		X	S				S	2500	-									-		B			C

Ordering profile components (SEL-DLS-LS1911KDXSS2500-BC)

Ordering luminaires kits (SEL-DLS-LS1911KDXSS2500-F15SW9X-DC)


SEL-LS1911C

- Domed lighting & "dot-free" lighting source producing homogeneous & sft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole
- Free & flexible connection

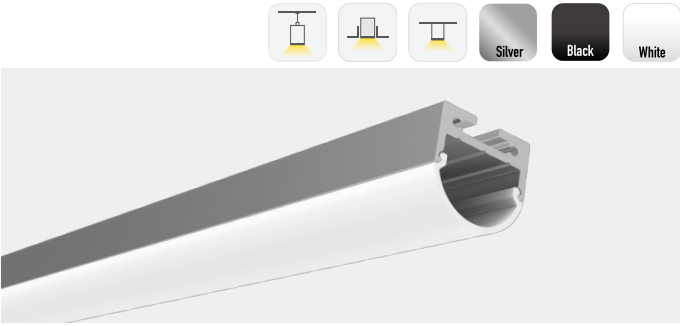

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 15W/m
Transmittance	>85%

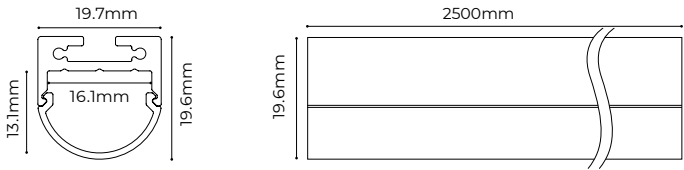

Profile Components

Profile	L2500Å W19.7Å H11.1mm	
Diffuser	L2500Å W19.7Å H10.6mm	
End cap	EC-LS1911CSS L19.7Å W19.7Å H5mm	
End cap with hole	EC-LS1911CSD L19.7Å W19.7Å H5mm	

Installation Accessories

Mounting clip	CP-07 38Å 15Å 4.5mm	
Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	
Pendant cable (Wire and line in one)	PN-EAX 2m/4m	

Standard extenders

180°/"L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	
---	---	--

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type		
DLS	-	Pendant Mounted	LS	1911	Curve	C	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	S	2500mm	-			24VDC flexible strip	F	15W/m	15	2700K	SW	>90	9	No Power	X	-	SEL Whole	B	SEL	C
											Black	B	Single end with hole	H					12VDC flexible strip	G			3000K	WW					SEL Individual	D	Customized	S	
											White	W	Double end with hole	D									4000K	NW									
																							6000K	W									
DLS	-		LS	1911		C		D		X	S			S	2500	-			F		15		SW		9		X	-		D		C	
DLS	-		LS	1911		C		D		X	S			S	2500	-											-			B		C	

Ordering profile components (SEL-DLS-LS1911CDXSS2500-BC)

Ordering luminaires kits (SEL-DLS-LS1911CDXSS2500-F15SW9X-DC)



Linear Lighting System

SEL' The linear lighting system is based on the "flexible" and "splicable" linear light sources, strengthening the fixture structure and optics design , and makes the light to be an important interior design element. The continuous splicable linear light can travel freely across space, and can be combined into an infinite creative space shaping at will, meet the basic needs of flood lighting and image decoration. The final effect is very creative and futuristic, give a new choice for space design.




Product Series

Linear Lighting System includes Linear Lighting System LLS2.0, Linear Lighting System M-LINE 60, Curve Lighting System LLS-C and Linear Lighting System SKYLINE series.


LLS 2.0 Series

The System, by changing the modular design and installation method of the product, has redefined the function and application mode of linear lighting and has broken the constraints on traditional lighting system, which has achieved "three freedoms", namely, the design freedom of people, the installation freedom of product, and the application freedom of environment. LLS2.0 is iterated and upgraded based on the LLS 1.0 design with more corner accessories added to achieve more creative styles.

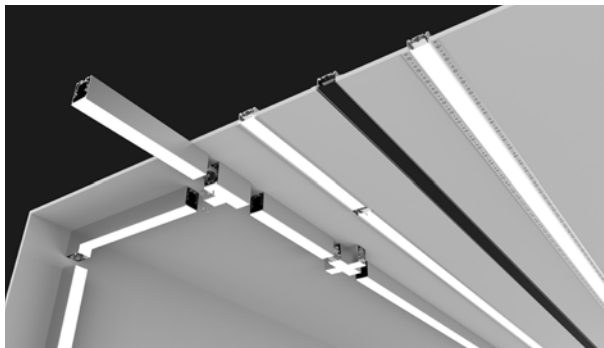

M-LINE 60 Series

SEL "M-LINE60" linear modular lighting system, combining wiring and lighting installation in one , different from traditional cumbersome installation, just need to pre-install the profile frame, then can switch 12 optical models at will Group, with more combination, it can accurately light up the space where light is needed, free light&shadow, applicable in many scenes.

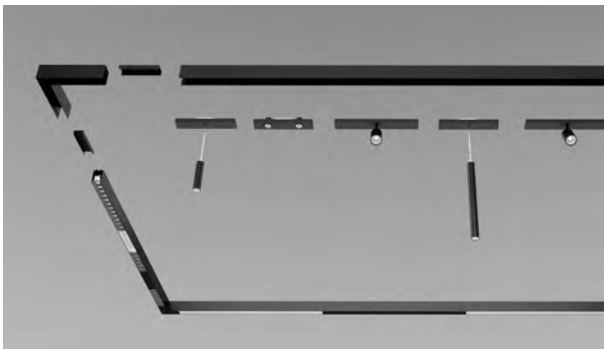


LLS-C Series

SEL Curve Lighting System, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The straight and curve basic modules are utilized to produce various circular luminaires, interconnect curves freely and intersperse combined structure randomly. limitless possibilities produce limitless imagination. The flowing light shuttles back and forth along the edge of ceilings, wall and floors, creating thousands of styles and opening new illumination horizons.



SKYLINE Series

SEL "SKYLINE series" connects two points to be one line, can be extremely free applied across space, and derive thousands of stylings, to bring a brand-new innovative experience to linear lighting, realize the purest linear beauty, and open up a new lighting experience.

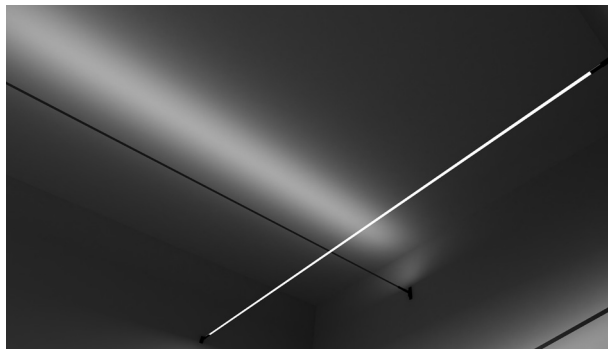



LLS-L FREE LIGHT

LLS-L free light, the newest linear lighting system launched by SEL, can shuttle freely among ceiling, floor and wall edge to form boundless creative styling through cutting, splicing and cornering of arbitrary lengths. It has been iterated to 3rd generation with installation experience, splicing experience and application flexibility improved significantly.

LLS-L serie includes mainstream sizes of 30mm, 50mm and 70mm, multiple installation methods of pendant, embedding, surface mounting and pre-embedding etc. Meanwhile, it offers a full set of product solution from light source, structural parts, installation accessories, power supply to driver, as well as flexible customization service in terms of surface processing, length, power and styling.

Product List

Model	Diagram	Product Size(Mm)	Installation Method	Exterior Color	Standard Splicing bar	Splicing Corner	Dedicated Light Source
SEL-BS3360		2500×33×60		  			DL8160-24V-8mm
SEL-BS5470		2500×54×70		  			DL8280-24V-18mm
SEL-BS7977		2500×79×77		  			DL8280-24V-30mm
SEL-BH3360		2500×33×60		  			DL8160-24V-8mm DL880-24V-8mm
SEL-BH5470		2500×54×70		  			DL8280-24V-18mm DL8160-24V-8mm
SEL-BH7977		2500×79×77		  			DL8280-24V-18mm DL8160-24V-8mm

Light Source for LLS-L

Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m	LM/m(4000K)	CRI	CCT/Color	Size	Package	Adaptive models
Flexible light source													
SEL-DL880-24V-8mm		80	8/100mm		24	8.2	7.5	1190	>80 >90	     	2500 x8x1.5mm	2.5M/Roll	Up Light: BH3360
SEL-DL8160-24V-8mm		160	850mm		24	16.5	15	2015	>80 >90	     	2500 x8x1.5mm	2.5M/Roll	Down light BS3360/BH336 0 Up Light: BH5470/BH7977
SEL-DL8280-24V-18mm		280	14/50mm		24	27.5	25	3400	>80 >90	     	2500 x18x1.5mm	2.5M/Roll	Down light BS5470/BH5470
SEL-DL8280-24V-30mm		280	14/50mm		24	33	30	4080	>80 >90	     	2500x 30x1.5mm	2.5M/Roll	Down light BS7977/BH7977



* All ErP information are reference to commission regulation(EU) 2019/2020
* ErP level may be different according to the CCT and CRI, the specific ErP level shall be subject to the specifications

Model	Drawing	Size L×W×H(mm)	Input Voltage	Input Current	Output Voltage	Output Current	Output Power	Power Factor	Power Efficiency	Certification
DALI dimming driver										
LV30W24 DALI		230×30×21mm	200-240VAC	0.18A Max	DC24V	1.25A Max	30W	0.92	83%	CE, ENEC
BK-DGV060-24V0D		285×30×21mm	200-240VAC	0.35A Max	DC24V	2.5A Max	60W	0.95	90%	CE, ENEC
BK-DGV100-24V0D		355×30×21mm	200-240VAC	0.7A Max	DC24V	4A Max	100W	0.95	91%	CE, ENEC
1-10V dimming driver										
LV30W24 1-10		230×30×21mm	200-240VAC	0.18A Max	DC24V	1.25A Max	30W	0.92	83%	CE, ENEC
BK-MGV060-24V0M		285×30×21mm	200-240VAC	0.35A Max	DC24V	2.5A Max	60W	0.95	89%	CE, ENEC
BK-MGV100-24V0M		355×30×21mm	200-240VAC	0.7A Max	DC24V	4A Max	100W	0.95	91%	CE, ENEC
Non-dimming driver										
BN-V24-030P-VI		261×30×17mm	220-240VAC	0.24A Max	DC24V	1.25A Max	30W	0.95	85%	CE
BN-V24-060P-VI		329×30×17mm	220-240VAC	0.46A Max	DC24V	2.5A Max	60W	0.95	89%	CE
BN-V24-100P-VI		365×30×18mm	220-240VAC	0.78A Max	DC24V	4.17A Max	100W	0.95	91%	CE

SEL-BS3360


NEW

- Innovative buckle end cap, all-wrapped for no light leakage.
- Carrier compact design, convenient for installation and maintenance.
- Germany brand diffuser, featured in uniform and soft light emission.
- Free splicing combination: 180°, L shape, T shape, X shape optional.
- Support built-in linear power supply, invisible and aesthetic.
- Multiple installation methods optional: pendant, embedded, surface mounted.

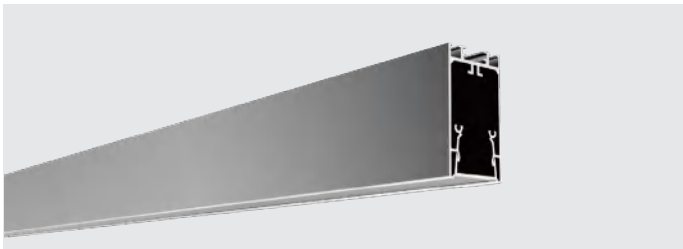

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%


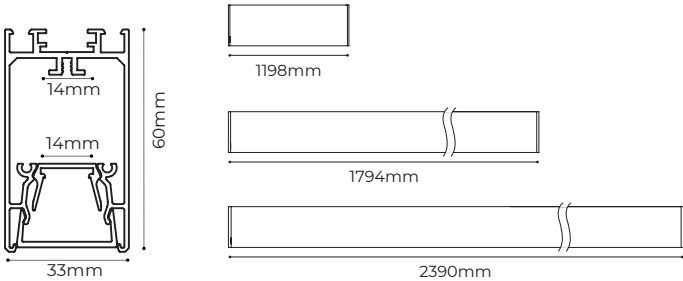


Profile Components ①

Profile & Carrier *1	L2500*W33*H60mm	
Diffuser	L2500*W26.6*H10.2mm	
End Cap	EC-BS3360FSS L33*W60*H10.5mm	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-01	

Light Source

Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DL8160-24V-8mm	>80 >90	2015LM/m	24V	15W/m	2500x8x1.5mm	160 LEDs	8LEDs/50mm

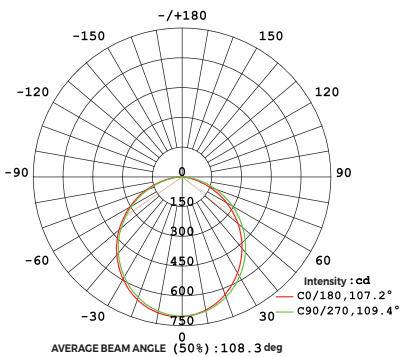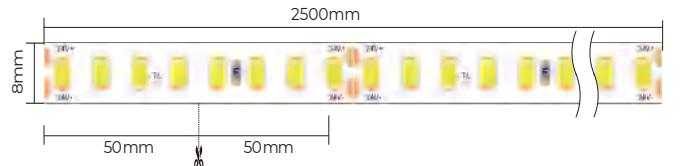


Height	Xavg, Xmax	Angle	Diameter
1m	226.8, 704.21x	107.23 deg	271.42cm
2m	56.69, 176.01x		542.85cm
3m	25.20, 78.241x		814.27cm
4m	14.17, 44.011x		1085.69cm
5m	9.071, 28.171x		1357.12cm
6m	6.299, 19.561x		1628.54cm
7m	4.628, 14.371x		1899.96cm
8m	3.543, 11.001x		2171.38cm
9m	2.800, 8.6931x		2442.81cm
10m	2.268, 7.0421x		2714.23cm

Note: The curves indicate of the illumination areas and the average luminance within the areas under different illumination distances.

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Trimless Recessed Accessory	RE-03 110X25X82mm	
Ceiling Accessory	CL-01 M3.5*40mm	
Reflective Paper	BG-23 15000 X19X0.188mm	
Integrated Wiring Accessory	CM-XX	

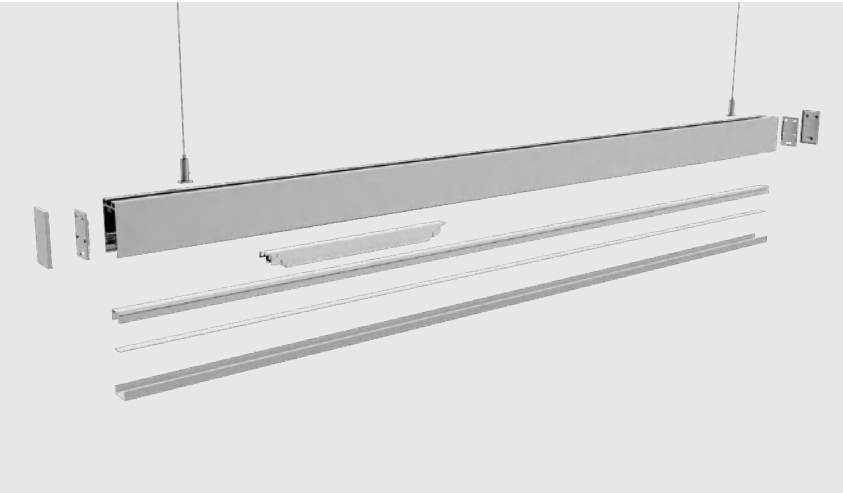

Corners ③

L shape	L90-BS3360 150X150X70mm	
L shape (inner)	L90N-BS3360 150X150X33mm	
L shape (outer)	L90W-BS3360 150X150X33mm	
T shape	T90-BS3360 300X177X60mm	
X shape	X90-BS3360 300X300X60mm	

Interconnection Accessory

Whole Luminaire Splicing Bar

EX-38-S
80X51X6mm



Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	261X30X17mm	24VDC	100W	

- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End Cap Type	Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type			
LLS	-	LLS-L	BS	3360	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	15W/m	15	2700K	SW	>80	8	1-10VDimming	D	-	SEL individual	D	SEL	L
	Black										B	3000K										WW	>90	9	DALI Dimming	A	Customized				S	
	Silver										S	3500K										PW			Non-dimming	N						
	4000K										NW																					
	5000K										DW																					
	6500K										W																					
LLS	-		BS	3360		F		D		F		W		S		2500	-		F		15		NW		8		D	-		D	L	
LLS	-		BS	3360		F		D		F		W		S		2500	-									-		D				

Ordering profile components

LLSBS3360FDFWS2500DL



Ordering luminaireskits

LLSBS3360FDFWS2500F15NW8DDL

SEL-BS5470


NEW

AL6063-T5 material, undergone high-quality surface processing.
Black, white, silver optional.
LM80 certified, Bridgelux light source, life span > 50000H.
Built-in highly-effective and safe flicker-free non-dimming power supply, support 1-10V or DALI dimming.
Power supply of CRI 90 can be customized.

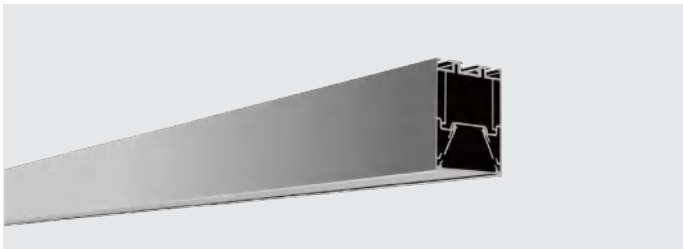

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003 Spraying RAL9005 Anodizing
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%


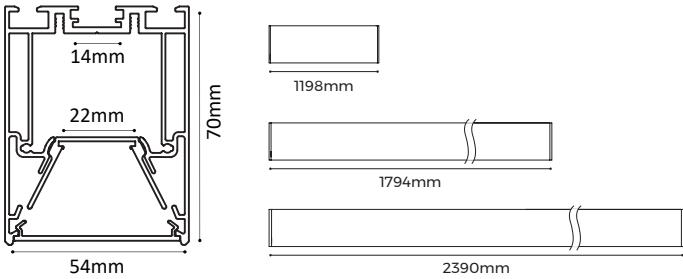


Profile Components ①

Profile & Carrier *1	L2500*W54*H70mm	
Diffuser	L2500*W48.8*H5.9mm	
End Cap	EC-BS5470FSS L54*W70*H10.5mm	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-02	


Light Source

Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DL8280-24V-18mm	>80 >90	3400LM/m	24V	25W/m	2500x18x15mm	280LEDs	14LEDs/50mm

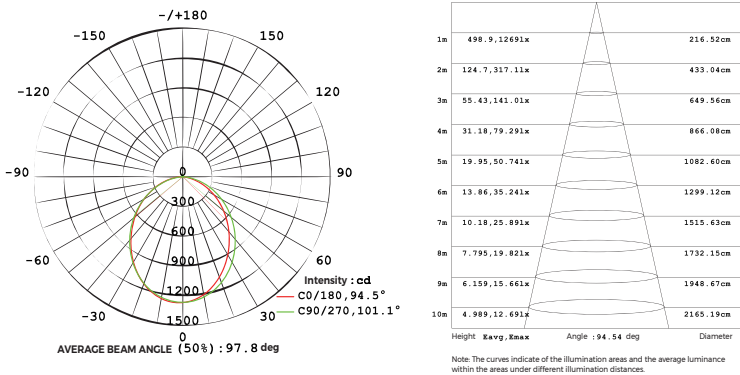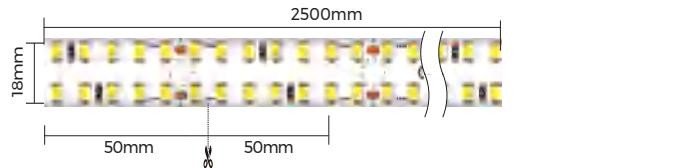

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Trimless Recessed Accessory	RE-03 110X25X82mm	
Ceiling Accessory	CL-01 M3.5*40mm	
Ceiling Accessory	CL-06 90.5X54X5.9mm	
Reflective Paper	BG-13 15000X19X0.188mm	
Integrated Wiring Accessory	CM-XX	

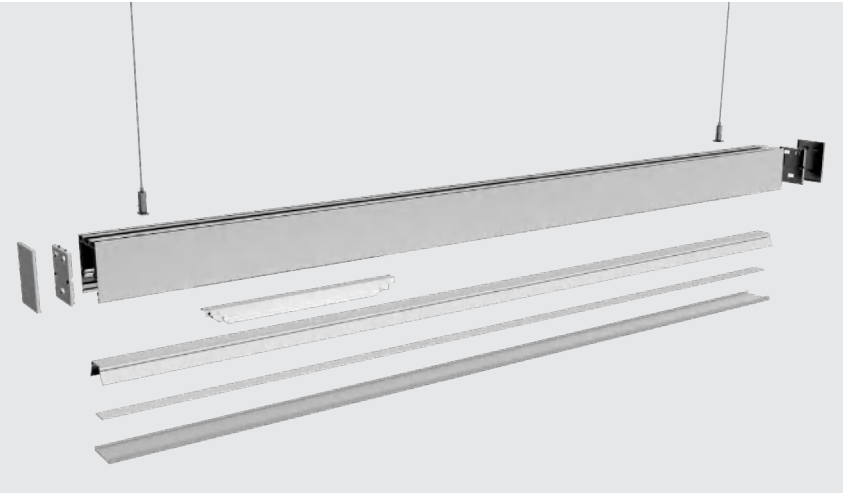

Corners ③

L shape	L90-BS5470 150X150X70mm	
L shape (inner)	L90N-BS5470 150X150X54mm	
L shape (outer)	L90W-BS5470 150X150X54mm	
T shape	T90-BS5470 300X177X70mm	
X shape	X90-BS5470 300X300X70mm	

Interconnection Accessory

Whole Luminaire Splicing Bar	EX-39-S 80X51X6mm
------------------------------	----------------------



Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	261X30X17mm	24VDC	100W	

- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code



Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Type	Profile Color	End Cap Type	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
LLS	-	LLS-L	BS	5470	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	25W/m	25	2700K	SW	>80	8	1-10VDimming	D	-	SEL individual	D	SEL	L
											Black	B										3000K	WW	>90	9	DALI Dimming	A				Customized	S
											Silver	S										3500K	PW			Non-dimming	N					
											4000K	NW																				
											5000K	DW																				
											6500K	W																				
LLS	-		BS	5470		F		D	F	W			S		2500	-		F		25		NW		8		D	-		D		L	
LLS	-		BS	5470		F		D	F	W			S		2500	-											-		D		L	

Ordering profile components LLSBS5470FDFWS2500DL Ordering luminaires kits LLSBS5470FDFWS2500F25NW8DDL

SEL-BS7977


NEW

- Innovative buckle end cap, all-wrapped for no light leakage.
- Carrier compact design, convenient for installation and maintenance.
- Germany brand diffuser, featured in uniform and soft light emission.
- Free splicing combination: 180°, L shape, T shape, X shape optional.
- Support built-in linear power supply, invisible and aesthetic.
- Multiple installation methods optional: pendant, embedded, surface mounted.

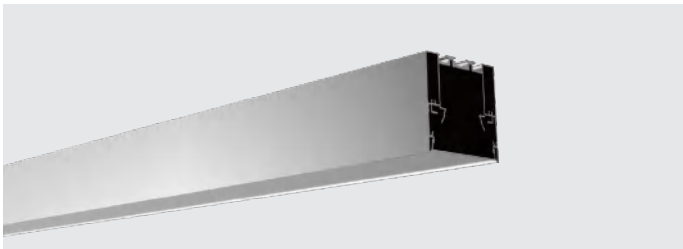

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003○ Spraying RAL9005● Anodizing●
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%


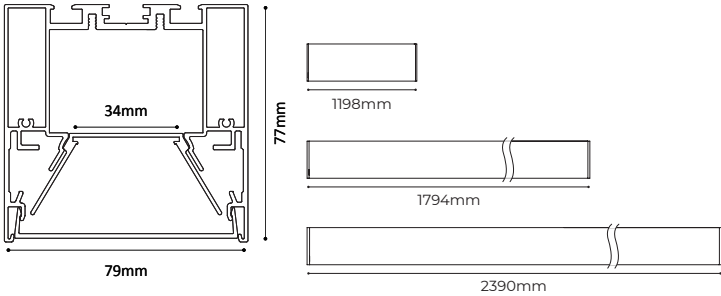


Profile Components ①

Profile & Carrier *1	L2500*W79*H77mm	
Diffuser	L2500*W62*H26.4mm	
End Cap	EC-BS7977FSS L79*W77*H10mm	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-21	


Light Source

Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DLB280-24V-30mm	>80 >90	4100LM/m	24V	30 W/m	2500x30x15.5mm	280LEDs	14LEDs/50mm

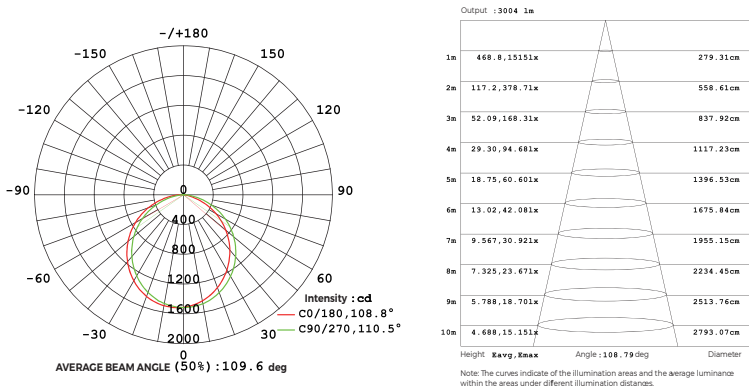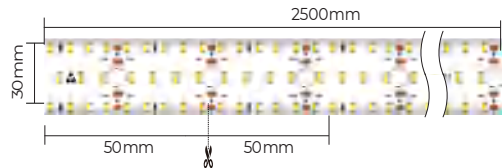

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Trimless Recessed Accessory	RE-04 135.4x25x90mm	
Ceiling Accessory	CL-01 M3.5*40mm	
Ceiling Accessory	CL-09 126x54x5.9mm	
Reflective Paper	BG-24 25000x26.3x0.2mm	
Integrated Wiring Accessory	CM-XX	

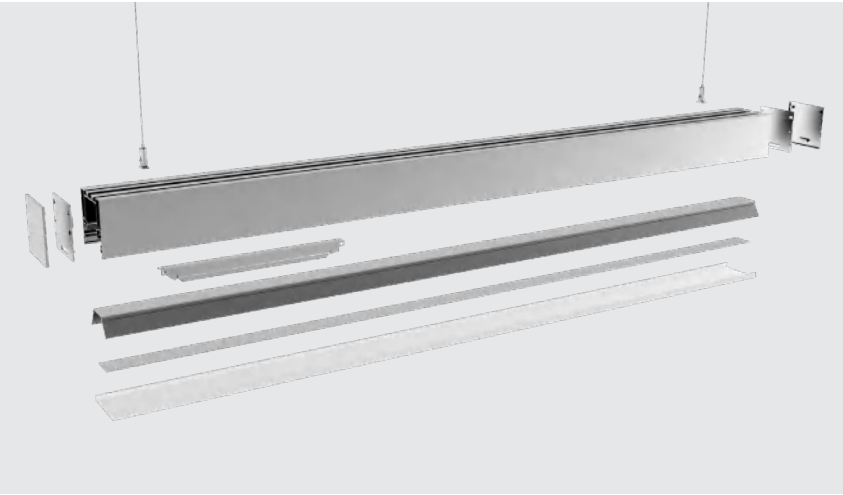

Corners ③

L shape	L90-BS7977 150X150X77mm	
L shape (inner)	L90N-BS7977 150X150X79mm	
L shape (outer)	L90W-BS7977 150X150X79mm	
T shape	T90-BS7977 300X177X77mm	
X shape	X90-BS7977 300X300X77mm	

Interconnection Accessory

Whole Luminaire Splicing Bar	EX-40-S 50X22.5X9mm
------------------------------	------------------------



Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	329X30X17mm	24VDC	100W	

- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Type	Profile Color	End Cap Type	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
LLS	-	LLS-L	BS	7977	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	30W/m	30	2700K	SW	>80	8	1-10VDimming	D	-	SEL individual	D	SEL	L
																						3000K	WW	>90	9	DALI Dimming	A			Customized	S	
																						3500K	PW			Non-dimming	N					
																						4000K	NW									
																						5000K	DW									
																						6500K	W									
LLS	-		BS	7977	F		D	F	W		S	2500	-					F		30		NW		8			D	-		D		L
LLS	-		BS	7977	F		D	F	W		S	2500	-														-		D			

Ordering profile components LLSBS7977FDFWS2500L


Ordering luminaireskits LLSBS7977FDFWS2500F30NW8DL

SEL-BH3360

NEW


- Upward and downward lighting profile
- Carrier compact design, convenient for installation and maintenance.
- Germany brand diffuser, featured in uniform and soft light emission.
- Free splicing combination: 180°, L shape, T shape, X shape optional.
- Support built-in linear power supply, invisible and aesthetic.

Multiple installation methods optional: pendant, embedded, surface mounted.

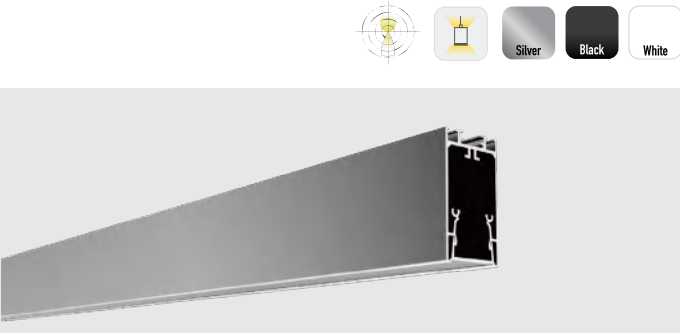

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%

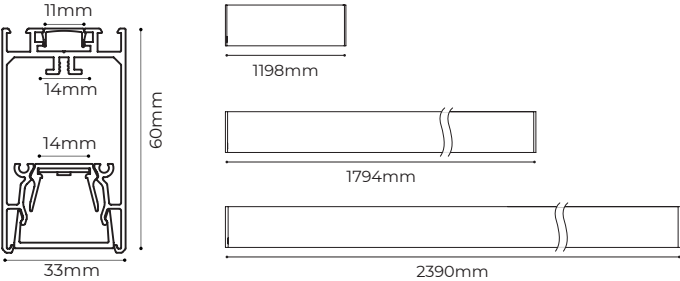




Profile Components ①

Profile & Carrier *1	L2500*W33*H60mm	
Diffuser	L2500*W26.6*H10.2mm	
End Cap	EC-BS3360FSS L33*W60*H5.5	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-01	

Light Source


Flexible LED strip

Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DL8160-24V-8mm	>80 >90	2015LM/m	24V	15W/m	2500x8x1.5mm	160 LEDs	8LEDs/50mm
DL880-24V-8mm	>80 >90	1015LM/m	24V	15W/m	2500x8x1.5mm	160 LEDs	8LEDs/100mm

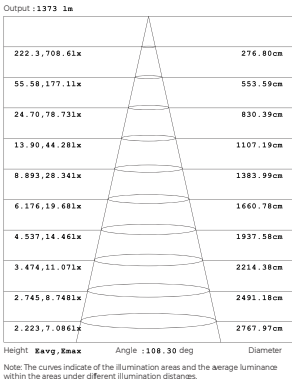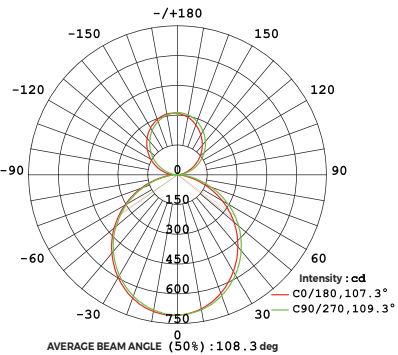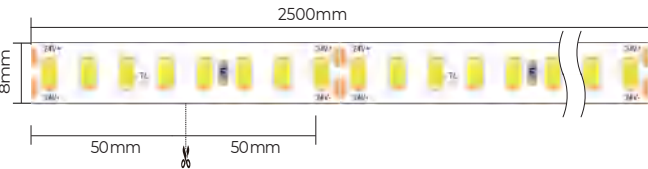

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Pendant Clip	CP-33	
Reflective Paper	BG-13 L5000*W10*H0.075mm	
Integrated Wiring Accessory	CM-XX	

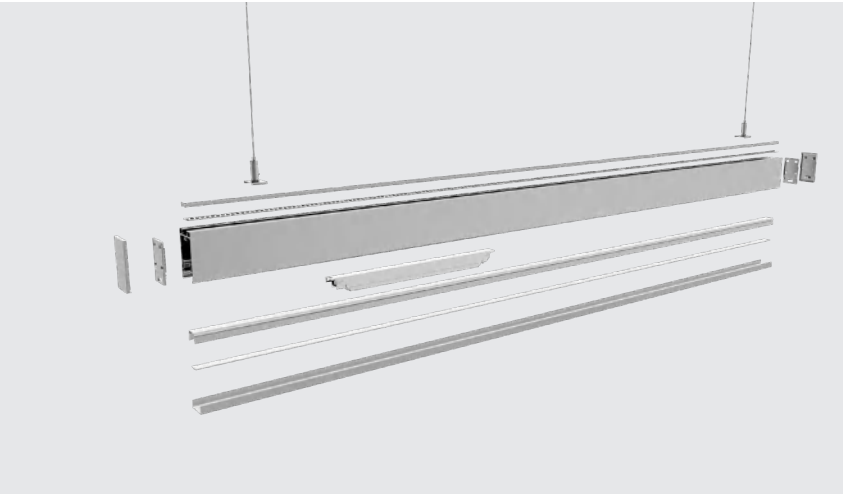

Corners ③

L shape	L90-BH3360 150X150X60mm	
T shape	T90-BH3360 300X177X60mm	
X shape	X90-BH3360 300X300X60mm	

Interconnection Accessory

Whole Luminaire Splicing Bar	EX-38-S 80X51X6mm	
------------------------------	----------------------	---

Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	329X30X17mm	24VDC	100W	

- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Type	Profile Color	End Cap Type	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type																
LLS	-	LLS-L	BH	3360	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	15W/m	15	2700K	SW	>80	8	1-10V Dimming	D	-	SEL individual	D	SEL	L		
											Black	B										3000K	WW	>90	9	DALI Dimming	A						Customized	S
											Silver	S										3500K	PW			Non-dimming	N							
											4000K	NW																						
											5000K	DW																						
											6500K	W																						
LLS	-		BH	3360		F		D	F		W		S		2500	-			F		15		NW		8		D	-		D		L		
LLS	-		BH	3360		F		D	F		W		S		2500	-											-		D					


Ordering profile components LLSBH3360FDFWS2500DL

Ordering luminaires kits LLSBH3360FDFWS2500F15NW8DDL

SEL-BH5470


NEW

- Innovative buckle end cap, all-wrapped for no light leakage.
- Carrier compact design, convenient for installation and maintenance.
- Germany brand diffuser, featured in uniform and soft light emission.
- Support free conjunction with general PC diffuser, flexible diffuser, anti-glare flexible diffuser, black diffuser and aluminum diffuser.
- Free splicing combination: 180°, L shape, T shape, X shape optional.
- Support built-in linear power supply, invisible and aesthetic.
- Multiple installation methods optional: pendant, embedded, surface mounted.

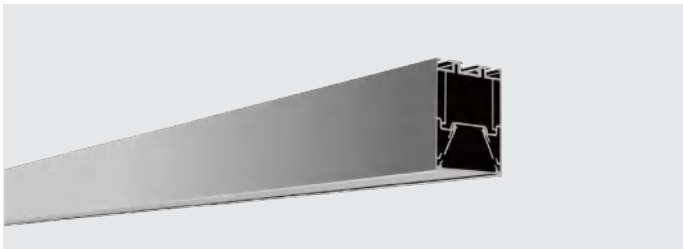

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003 Spraying RAL9005 Anodizing
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%



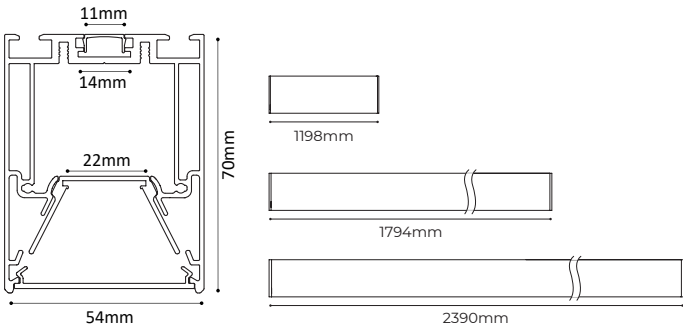


Profile Components ①

Profile & Carrier *1	L2500*W54*H70mm	
Diffuser	L2500*W48.8*H5.6mm	
End Cap	EC-BS5470FSS L54*W70*H10.5mm	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-02	


Light Source

Flexible LED strip							
Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DL8280-24V-18mm	>80 >90	3400LM/m	24V	25W/m	2500x18x1.5mm	280LEDs	14LEDs/50mm
DL8160-24V-8mm	>80 >90	2015LM/m	24V	15W/m	2500x8x1.5mm	160LEDs	8LEDs/50mm

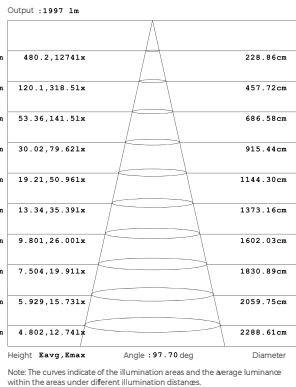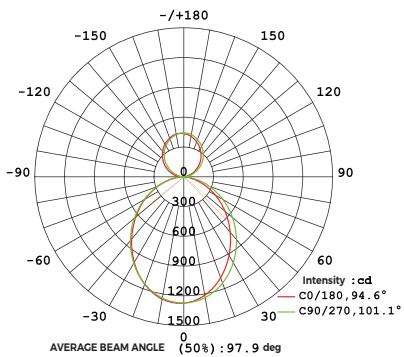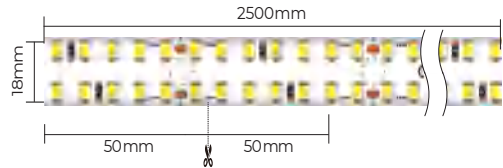

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Pendant Clip	CP-16	
Reflective Paper	BG-13 15000 X19X0.188mm	
Integrated Wiring Accessory	CM-XX	

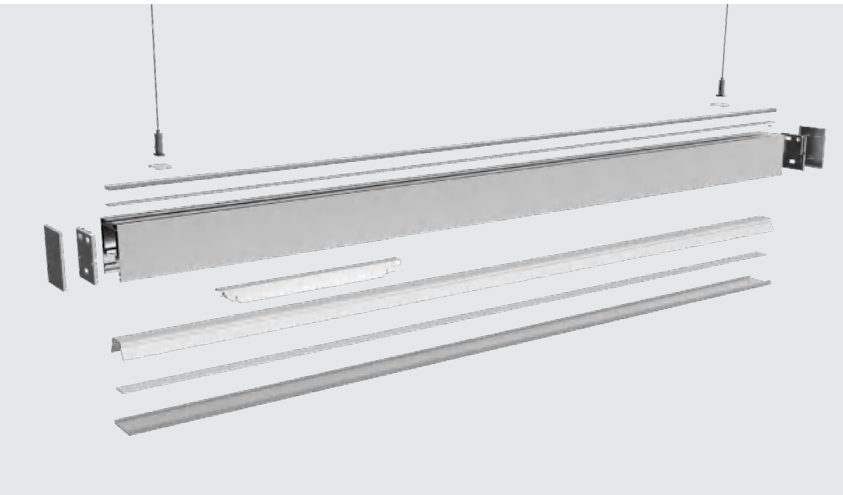

Corners ③

L shape	L90-BH5470 150X150X70mm	
T shape	T90-BH5470 300X177X70mm	
X shape	X90-BH5470 300X300X70mm	

Interconnection Accessory

Whole Luminaire Splicing Bar

EX-39-S
80X51X6mm



Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	261X30X17mm	24VDC	100W	

- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code


Category	-	Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color	End Cap Type	Length	-	Light Source Type	Light Source Power		CCT	CRI		Power Type		-	Package		Label Type						
LLS	-	LLS-L	BS	5470	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	25W/m	25	2700K	SW	>80	8	1-10VDimming	D	-	SEL individual	D	SEL	L
											Black	B										3000K	WW	>90	9	DALI Dimming	A			Customized	S	
											Silver	S										3500K	PW			Non-dimming	N					
											4000K	NW																				
											5000K	DW																				
											6500K	W																				
LLS	-		BH	5470	F		D	F		W		S	2500	-		F	25		NW		8			D	-		D		L			
LLS	-		BH	5470	F		D	F		W		S	2500	-										-		D						

Ordering profile components LSBH5470FDFWS2500DL

Ordering luminaires kits LLSBH5470FDFWS2500F25NW8DDL


SEL-BH7977

- Innovative buckle end cap, all-wrapped for no light leakage.
- Carrier compact design, convenient for installation and maintenance.
- Germany brand diffuser, featured in uniform and soft light emission.
- Free splicing combination: 180°, L shape, T shape, X shape optional.
- Support built-in linear power supply, invisible and aesthetic.
- Multiple installation methods optional: pendant, embedded, surface mounted.

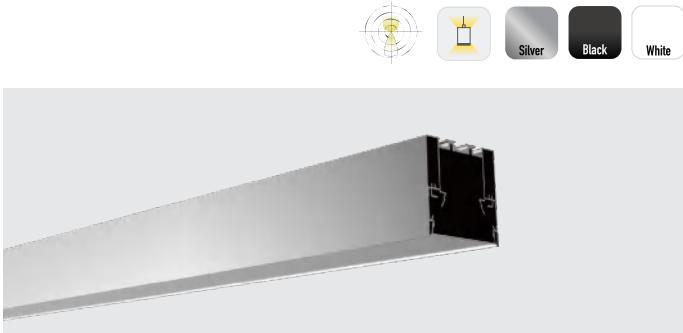

Basic Parameters

Profile	AL6063-T5
Surface Processing	Spraying RAL9003 Spraying RAL9005 Anodizing
Diffuser Material	PC
Heat Dissipation	Max 38W/m
Transmittance	>75%



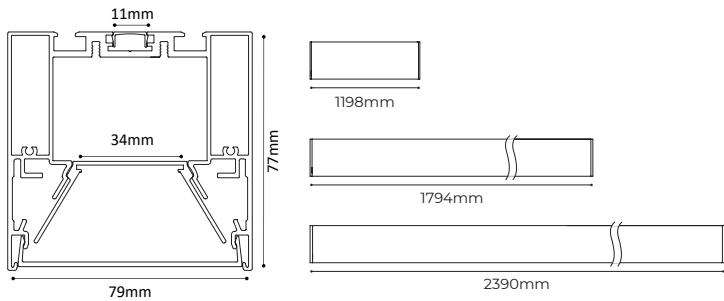


Profile Components ①

Profile & Carrier *1	L2500*W79*H77mm	
Diffuser	L2500*W62*H26.4mm	
End Cap	EC-BS7977FSS L79*W77*H10mm	
Ceiling Accessories	CL-01 M3.5*40mm	
Accessories Package	BG-21	


Light Source

Model	CRI	Lumens②	Voltage	Typ. Power	Dimension	LEDs/m	Cutting unit
DLB280-24V-18mm	>80 >90	3400LM/m	24V	25W/m	2500x18x1.5mm	280LEDs	14LEDs/50mm
DLB160-24V-8mm	>80 >90	2015LM/m	24V	15W/m	2500x8x1.5mm	160LEDs	8LEDs/50mm

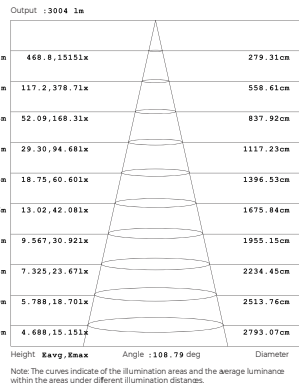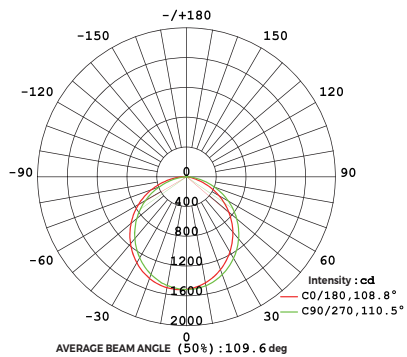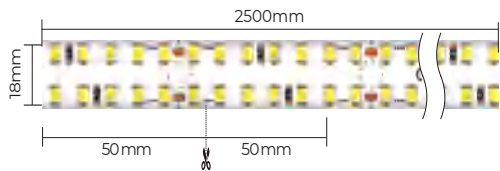

Installation Accessory

Pendant Accessory (with junction box)	PY-DXXX 2m/4m	
Pendant Accessory	PN-DXX 2m/4m	
Pendant Clip	CP-16	
Reflective Paper	BG-24 2500X26.3X0.2mm	
Integrated Wiring Accessory	CM-XX	

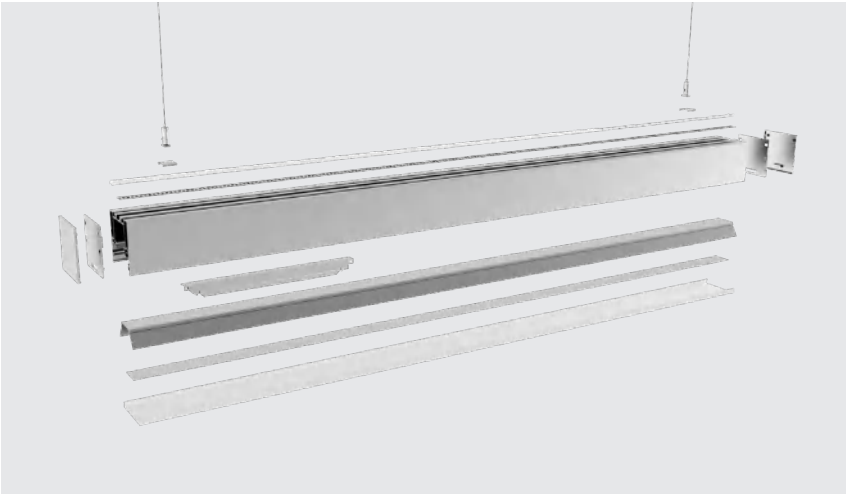

Corners ③

L shape	L90-BH5470 150X150X70mm	
T shape	T90-BH5470 300X177X70mm	
X shape	X90-BH5470 300X300X70mm	

Interconnection Accessory

Whole Luminaire Splicing Bar	EX-40-S 80X51X6mm
------------------------------	----------------------



Power Supply ④

Model	Size	Output Voltage	Output Power	Diagram
BN-V24-060P-VI	261X30X17mm	24VDC	100W	



- ①Parts of profile components can be purchased separately
- ②Corners with or without power supply is optional
- ③The luminous flux is the testing result of 4000K product
- ④Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End Cap Type	Length		-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type				
LLS	-	LLS-L	BH	7977	Flat	F	Diffuser	D	Flat	F	White	W	Holeless end cap	S	2500mm	2500	-	Flexible strip	F	30W/m	30	2700K	SW	>80	8	1-10VDimming	D	-	SEL individual	D	SEL	L		
											Black	B										3000K	WW	>90	9	DALI Dimming	A						Customized	S
											Silver	S										3500K	PW			Non-dimming	N							
											4000K	NW																						
											5000K	DW																						
											6500K	W																						
LLS	-		BH	7977		F		D		F		W		S	2500	-			F	30		NW		8		D	-		D		L			
LLS	-		BH	7977		F		D		F		W		S	2500	-										-		D						

SEL-BS3360


- Profile material-AL6063-T5; high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, life span >50000H.
- Built-in high-efficient and safe flicker-free non-dimming power supply; supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

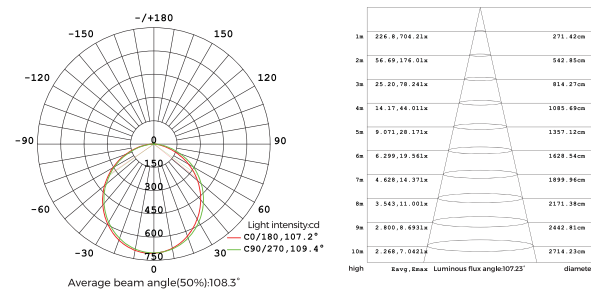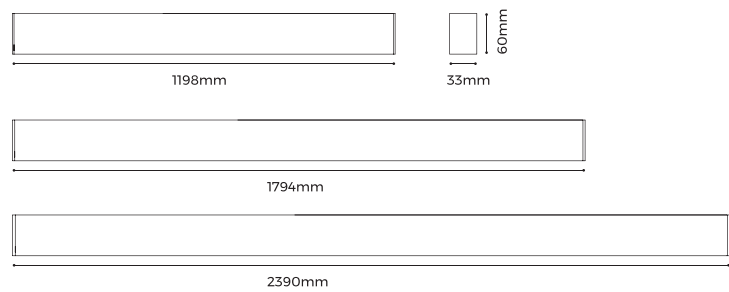

Luminaire Parameters			
Size	1198*33*60mm	1794*33*60mm	2390*33*60mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	2000LM	2800LM	3880LM
Power	20W	28W	39W
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver  White  Black 		
Installation Method	Pendant/ Ceiling/ Embedding		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessories

Pendant Accessory (with junction box)	PY-DXXX 2m ⁴ /4m	
Pendant Accessory	PN-DXX 2m ⁴ /4m	
Ceiling Screws	CL-01 M3.5×40mm	
Pendant Rods	PG-IA2	
Whole Luminaire Splicing Bar	EX-38-S 80X51X6mm	

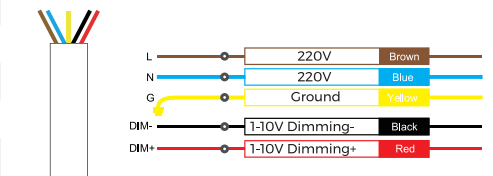



Ordering Code

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap type		Length		Light Source Type		Typical power		CCT		CRI		Power Type		Package		Label Type		
LLS	-	LLS-L	BS	30	Flat	F	Diffuser	D	Flat	F	White	W	Holeless	S	118mm	1200mm	Constant Current Rigid Module	T	20W	20	2700K	SW	>80	8	100%Dimming	B	SEL individual	D	SEL	L
											Black	B			1794mm	1800mm			28W	28	3000K	WW	>90	9	DAJ Dimming	A		Customized	S	
											Silver	S			2390mm	2400mm			39W	39	3500K	PW	Nondimming	N						
											4000K	NW																		
											5000K	DW																		
											6500K	W																		
LLS	-		BS	3360		F		D		F	W		S	1200		-		T	20		NW	8		N	-		D			

LLS-BS3360FDFWS1200-T20NW8N-DL

SEL-BS5470


- Profile material-AL6063-T5, high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, Life span >50000H.
- Built-in high-efficient and safe flicker-free non-dimming power supply; supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

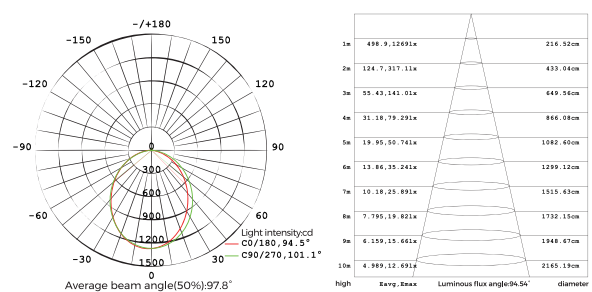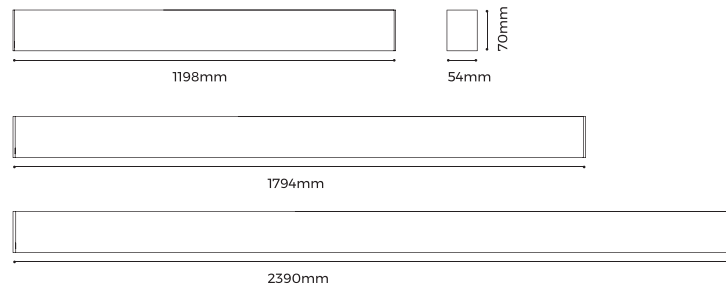

Luminaire Parameters			
Size	1198*54*70mm	1794*54*70mm	2390*54*70mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	2000LM	4095LM	5775LM
Power	28W	39W	55W
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver  White  Black 		
Installation Method	Pendant/ Ceiling/ Embedding		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessories

Pendant Accessory (with junction box)	PY-DXXX 2m ¹ / ₄ m	
Pendant Accessory	PN-DXX 2m ¹ / ₄ m	
Trimless Recessed Accessory	RE-03 110×25×82mm	
Ceiling Screws	CL-01 M3.5×40mm	
Ceiling Accessory	CL-06 90.5×54×5.9mm	
Pendant Rods	PG-1A2	
Whole Luminaire Splicing Bar	EX-39-S 80X51X6mm	

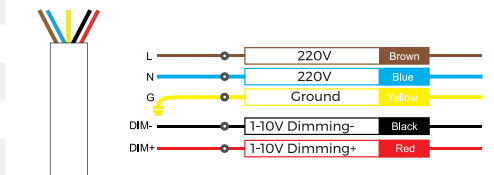**Ordering Code**

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap Type		Length		Light Source Type		Typical power		CCT		CRI		Power Type		Package		Label Type		
LLS	-	LLS-L	BS	50	Flat	F	Diffuser	D	Flat	F	White	W	Holeless	S	1198mm	1200mm	Constant Current Rigid Module	T	28W	28	2700K	SW	>80	8	H0VDimming	B	SEL individual	D	SEL	L
											Black	B			1794mm	1800mm			39W	39	3000K	VWV	>90	9	DAUDimming	A			Customized	S
											Silver	S			2390mm	2400mm			55W	55	3500K	PW	Non-dimming	N						
																					4000K	NW								
																					5000K	DW								
LLS	-		BS	5470		F		D		F	W		S		1200	-		T		28		NW		8		B	-		D	




LLS-BS5470FDFWS1200-T28NW8B-DL



SEL-BS7977


NEW

- Profile material-AL6063-T5; high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, life span >50000H
- Built-in high-efficient and safe flicker-free non-dimming power supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

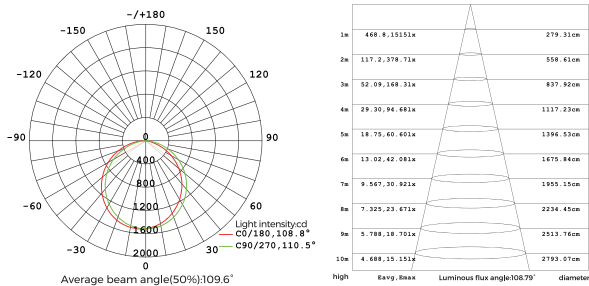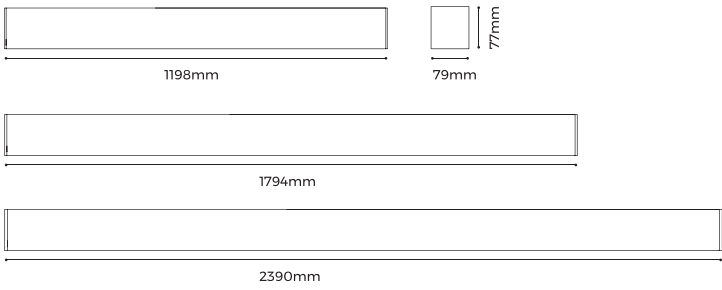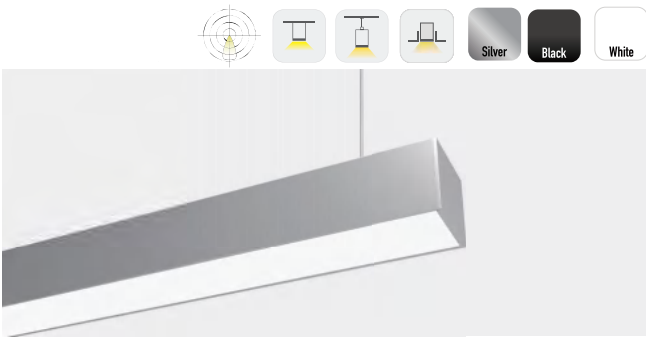

Luminaire Parameters			
Size	1198*79*77mm	1794*79*77mm	2390*79*77mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	4290LM	6820LM	8470LM
Power	28W	39W	55W
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver White Black		
Installation Method	Pendant/ Ceiling/ Embedding		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessories	
Pendant Accessory (with junction box)	PY-LXXX 2m/4m
Pendant Accessory	PN-LXX 2m/4m
Trimless Recessed Accessory	RE-04 1354X25X90mm
Ceiling Accessory	CL-09 126X54X5.9mm
Pendant Rods	PG-1A2
Whole Luminaire Splicing Bar	EX-40 50X22.5X9mm

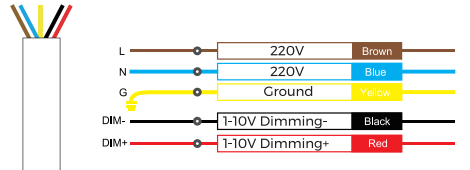

Ordering Code

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap Type	Length		Light Source Type	Typical power		CCT	CRI		Power Type		Package	Label Type										
LLS	-	LLS-L	BS	70	Flat	F	Diffuser	D	Flat	F	White	W	Holeless	S	1198mm	1200mm	Constant Current rigid Module	T	39W	39	2700K	SW	>80	8	10VDimming	B	SEL individual	D	SEL	L				
											Black	B			1794mm	1800mm			62W	62	3000K	WW	>90	9	DAUDimming	A					Customized	S		
											Silver	S			2390mm	2400mm			77W	77	4000K	NW	5000K	DW	6500K	W							Non-dimming	N
LLS	-		BS	7977		F		D		F		W		S		1200	-		T		39		NW	8		N	-		D		L			




LLS-BS7977DFW51200-T39NW8N-DL



SEL-BH3360


NEW

- Profile material-AL6063-T5; high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, life span >50000H.
- Built-in high-efficient and safe flicker-free non-dimming power supply; supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

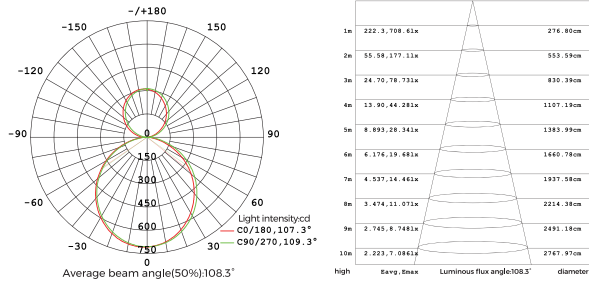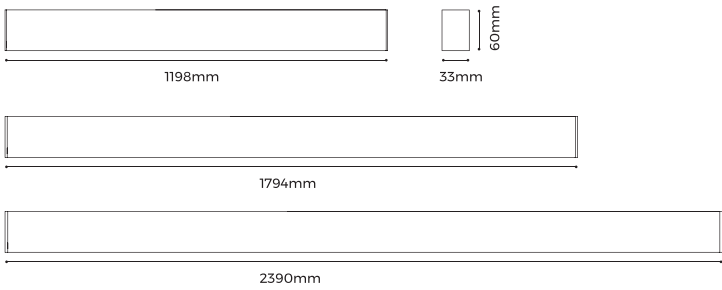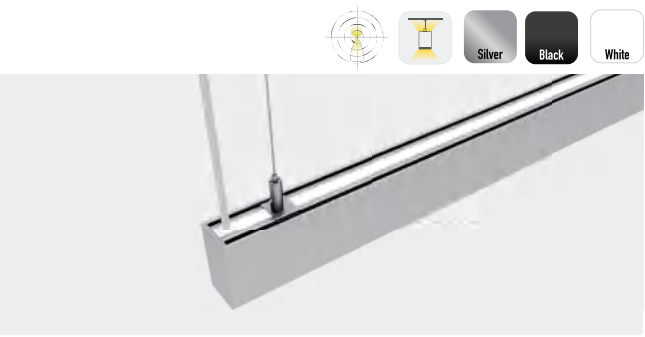

Luminaire Parameters			
Size	1198*33*60mm	1794*33*60mm	2390*33*60mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	900lm(up)1900lm(down)	1500lm(up)3100lm(down)	2100lm(up)4100lm(down)
Power	9W(up)19W(down)	15W(up)31W(down)	21W(up)41W(down)
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver White Black		
Installation Method	Pendant		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessories	
Pendant Accessory (with junction box)	PY-DXXX 2m/4m
Pendant Accessory	PN-DXX 2m/4m
Pendant Clip	CP-13
Whole Luminaire Splicing Bar	EX-24 80X51X6mm

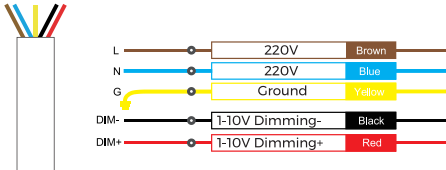

Ordering Code

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap Type		Length		Light Source Type		Typical power		CCT		CRI		Power Type		Package		Label Type		
LLS	-	BH	30	Flat	F	Diffuser	D	Flat	X	White	W	Holeless	S	1198mm	1200mm	Constant Current Rigid Module	T	28W	28	2700K	SW	>80	8	10V Dimming	B	SEL individual	D	SEL	L	
										Black	B			1794mm	1800mm			46W	46	3000K	WW	>90	9	DAU Dimming	A			Customized	S	
										Silver	S			2390mm	2400mm			62W	62	3500K	PW	Non-dimming	N							
										4000K	NW																			
										5000K	DW																			




LLS-BH3360FDXWS1200-T28NW8N-DL



SEL-BH5470




- Profile material-AL6063-T5; high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, life span >50000H.
- Built-in high-efficient and safe flicker-free non-dimming power supply; supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

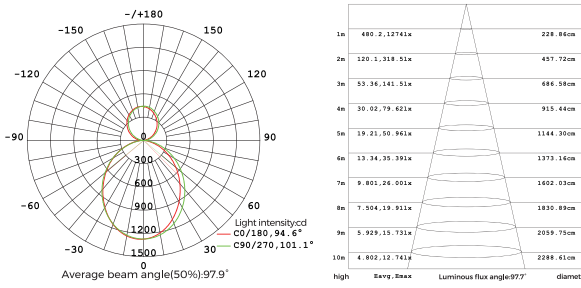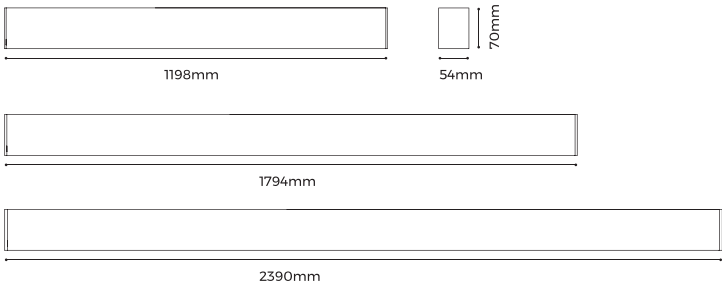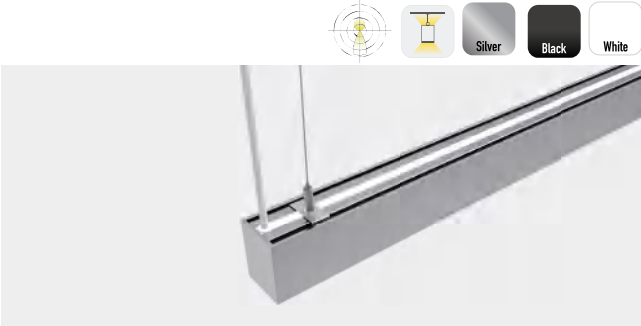

Luminaire Parameters			
Size	1198*54*70mm	1794*54*70mm	2390*54*70mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	1365lm(up)/2730lm(down)	2205lm(up)/4305lm(down)	2730lm(up)/5355lm(down)
Power	13W(up)/26W(down)	21W(up)/41W(down)	26W(up)/51W(down)
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver White Black		
Installation Method	Pendant		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessory	
Pendant Component (with ceiling box)	PY-DXXX 2m/4m
Pendant Component (without ceiling box)	PN-DXX 2m/4m
Lifting clip	CP-16
Whole light splicing strip	EX-39-S 80X51X6mm

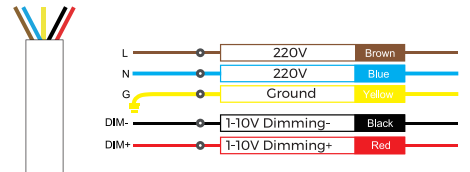

Ordering Code

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap Type		Length		Light Source Type		Typical power		CCT		CRI		Power Type		Package		Label Type												
LLS	-	LLS-L	BH	50	Flat	F	Diffuser	D	Flat	X	White	W	Holeless	S	1198mm	1200mm	- Constant Current Rigid Module	T	39W	39	2700K	SW	>80	8	10V/Dimming	B	-	SEL individual	D	SEL	L									
											Black	B																											Customized	S
											Silver	S																												
LLS	-		BH	5470		F		D		X	W		S		1200	-		T	39		NW		8		B	-		D		L										



LLS-BH5470FDXWS1200-T39NW8B-D L



SEL-BH7977




- Profile material-AL6063-T5; high-quality surface processing.
- Three colors optional -Black, White and Silver.
- Qualified for LM80 certification, Bridgelux light source, life span >50000H.
- Built-in high-efficient and safe flicker-free non-dimming power supply; supports 1-10V/ DALI dimming.
- Support customization of Ra90 light source.

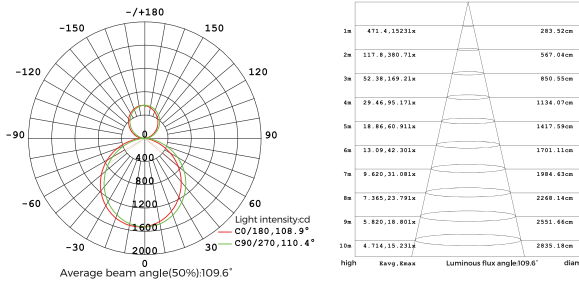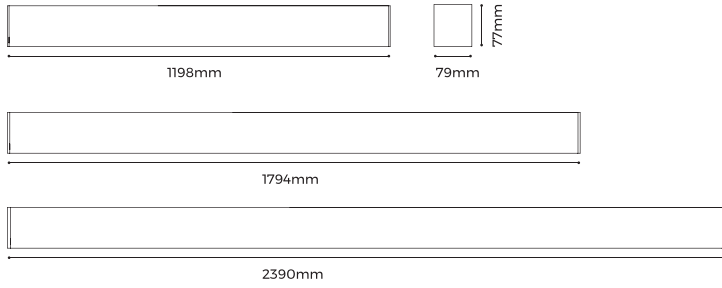

Luminaire Parameters			
Size	1198*79*77mm	1794*79*77mm	2390*79*77mm
Diffuser	Diffuser		
Diffuser Material	PC		
Luminous Flux	1540lm(up)/4510lm(down)	2200lm(up)/6270lm(down)	3080lm(up)/8470lm(down)
Power	14W(up)/41W(down)	20W(up)/57W(down)	28W(up)/77W(down)
CCT	2700K/3000K/3500K/4000K/5000K/6500K		
CRI	>80		
Beam Angle	110°		
Input Voltage	200-240VAC 50Hz/60Hz		
Power Factor	>0.9		
Power Supply	Built-in isolated power supply		
Dimming Method	Non-dimming/1-10V/DALI		
Luminaire Color	Silver White Black		
Installation Method	Pendant		
Warranty	5 years		
Certification	CE (Under Certification)		

Installation Accessory	
Pendant Accessory (with junction box)	PY-DXXX 2m/4m
Pendant Accessory	PN-DXX 2m/4m
Pendant Clip	CP-16
Whole Luminaire Splicing Bar	EX-24 80X51X6mm

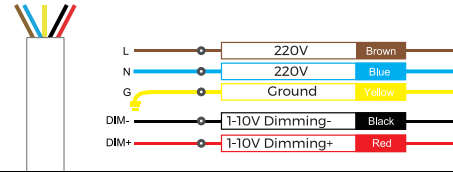


Ordering Code

Category	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Type		Profile Color		End cap Type	Length	Light Source Type	Typical power		CCT	CRI	Power Type		Package	Label Type																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
LLS	-	LLS-L	BH	70	Flat	F	Diffuser	D	Flat	X	White	W	Holeless	S	1198mm	1200mm	Constant Current Rigid Module	T	55W	55	2700K	SW	>80	8	10V/Dimming	B	-	SEL individual	D	SEL	L																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
											Black	B			1794mm	1800mm			77W	77	3000K	WW								>90	9	DALI/Dimming	A	Customized	S																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
											Silver	S			2390mm	2400mm			105W	105	4000K	NW																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
																																				5000K	DW																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
																																						6500K	W																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		

LLS-BH7977FDXWS1200-T55NW8N-D L












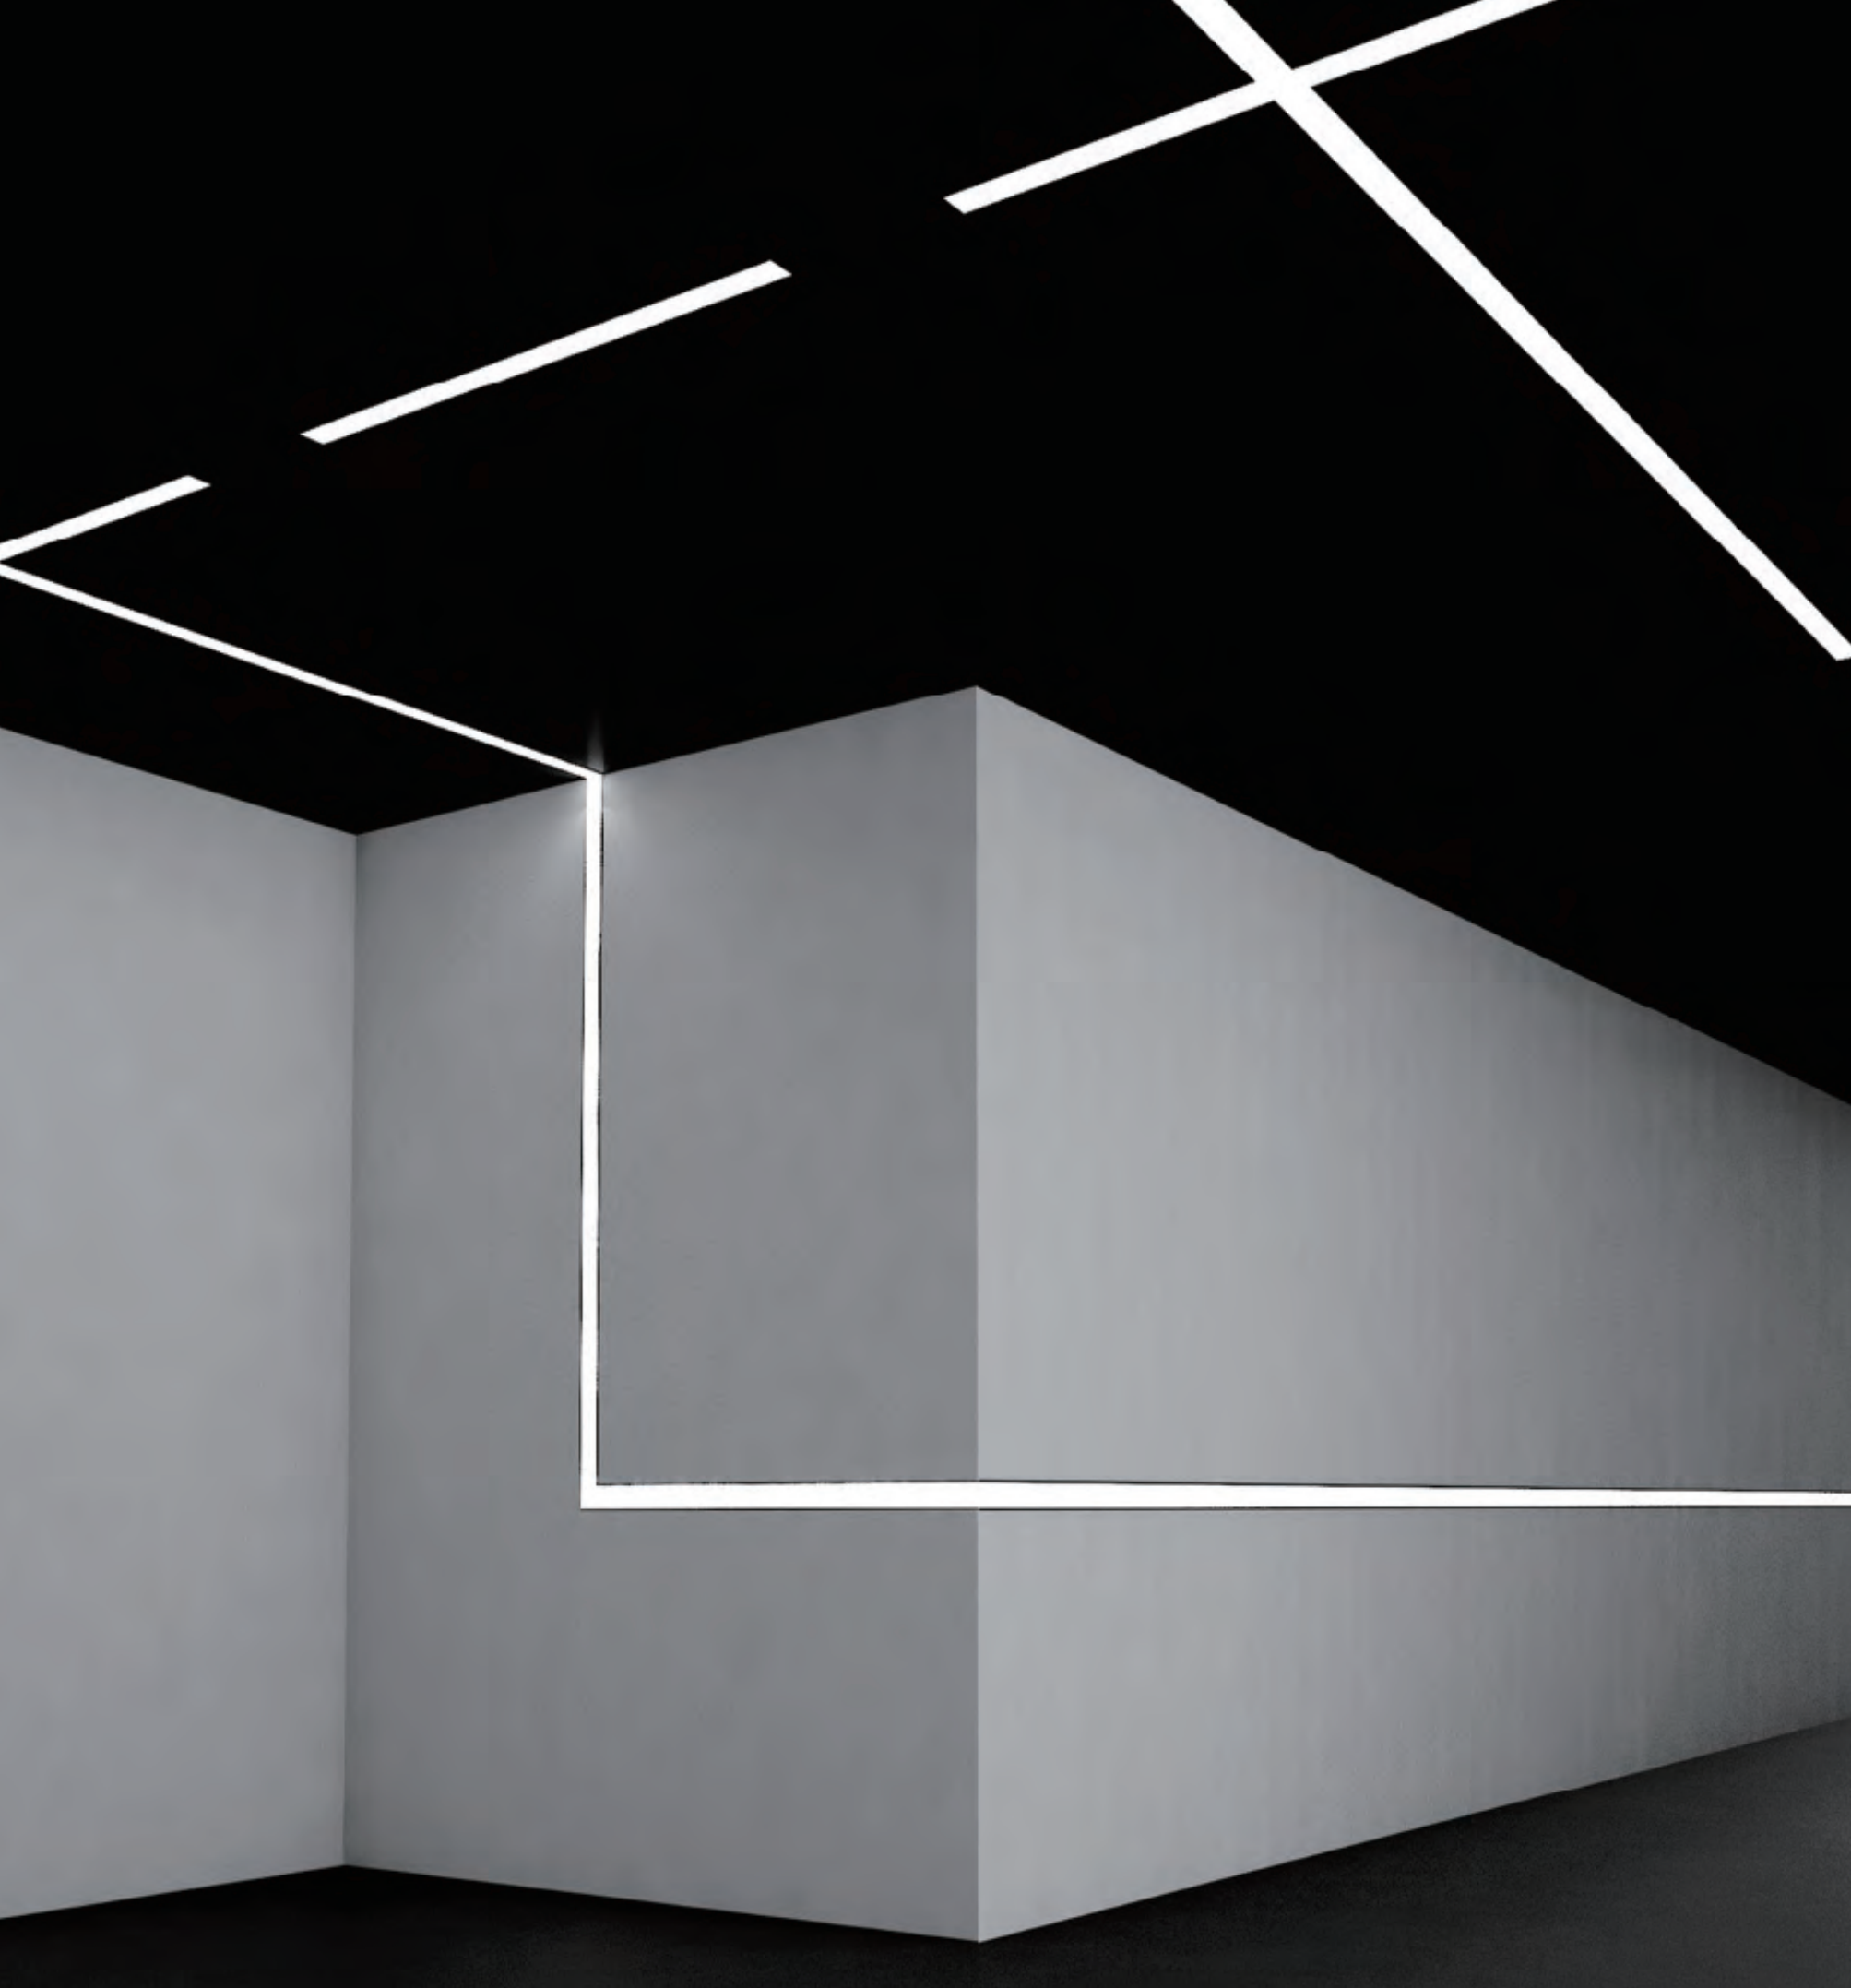

LLS 2.0 Series

Linear lighting system 2.0 redefines features and application mode of linear lighting in virtue of its innovative modular design and installation method. It breaks restraint of traditional lighting system, and further achieve "three freedom", that is, design freedom, installation freedom and application freedom. Iterating from LLS1.0, it enriches many corner accessories to achieve more creative styling.


Product List

Model	Drawing	Size L×W×H(mm)	Installation	Coating	Standard extender	Customizable corners	Light source
30mm (Luminous surface size)							
SEL-LS3360		2500×33×60					D8280-24V-15mm DY8280-24V-17mm
40mm (Luminous surface size)							
SEL-LS4067		2500×40×67					D8280-24V-20mm DY8280-24V-23mm
SEL-LE5535		2500×55×35					D8280-24V-20mm DY8280-24V-23mm
50mm (Luminous surface size)							
SEL-LS5470(F)		2500×54×70					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LE6935(F)		2500×69×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LR5535(A)		2500×95×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LR5535(B)		2500×93×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
70mm (Luminous surface size)							
SEL-LS7977		2500×79×77					D8420-24V-59mm DY8420-24V-62mm
SEL-LE9435		2500×94×35					D8420-24V-59mm DY8420-24V-62mm
>100mm (Luminous surface size)							
SEL-LS10570		2500×105×70					D8560-24V-85mm DY8560-24V-88mm
SEL-LS12335		2500×123×35					D8560-24V-85mm
φ60/90/120mm (Luminous surface size)							
SEL-LT60		2500×φ60					D8280-24V-20mm
SEL-LT90		2500×φ90					D8160-24V-15mm
SEL-LT120		2500×φ120					D8420-24V-59mm

Light Source for LLS2.0

Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m		LM/m(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Flexible light source														
SEL-D8160-24V-15mm		160	8/50 mm		24	10.5	9.5		1510 1280	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x15x1.5mm	5M/Roll	LT90
SEL-D8280-24V-15mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x15x1.5mm	2.5M/Roll	LS3360
SEL-D8280-24V-20mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x20x1.5mm	2.5M/Roll	LS4067/LE5535/LT60
SEL-D8280-24V-34mm		280	14/50 mm		24	27.5	25		3250 2750	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x34x1.5mm	2.5M/Roll	LS5470(F)/LE6935(F) LR5535(A)/LR5535(B)
SEL-D8420-24V-59mm		420	21/50 mm		24	33	30		3900 3300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x59x1.5mm	2.5M/Roll	LS7977 LE9435 LT120
SEL-D8560-24V-85mm		560	28/50 mm		24	44	40		5050 4300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x85x1.5mm	2.5M/Roll	LS10570 LS12335
SEL-D8560SWW-24V-34mm		560	28/50 mm		24	27.5	25		2740	>80	2700 K 6000 K	2500x34x1.5mm	2.5M/Roll	LS5470(F)/LE6935(F) LR5535(A)/LR5535(B)

Light Source for LLS2.0

Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m		LM/m(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Rigid module														
SEL-DY8280-24V-17mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	249x17x5.6mm 299x17x5.6mm 499x17x5.6mm	20 pcs/Box 16 pcs/Box 20 pcs/Box	LS3360
SEL-DY8280-24V-23mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	249x23x5.6mm 299x23x5.6mm 499x23x5.6mm	20 pcs/Box 16 pcs/Box 20 pcs/Box	LS4067/LE5535/
SEL-DY8280-24V-36mm		280	14/50 mm		24	27.5	25		3250 2750	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x36x5.6mm 499x36x5.6mm	16 pcs/Box 20 pcs/Box	LS5470 (F)/LE6935 (F) LR5535 (A)/LR5535 (B)
SEL-DY8420-24V-62mm		420	21/50 mm		24	33	30		3900 3300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x62x5.6mm 499x62x5.6mm	8 pcs/Box 10 pcs/Box	LS7977 LE9435
SEL-DY8560-24V-88mm		560	28/50 mm		24	44	40		5050 4300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x88x5.6mm 499x88x5.6mm	8 pcs/Box 10 pcs/Box	LS10570
SEL-DY8560SWW-24V-36mm		560	28/50 mm		24	27.5	25		2740	>80	2700 K 6000 K	499x36x5.6mm	20 pcs/Box	LS5470 (F)/LE6935 (F) LR5535 (A)/LR5535 (B)

Power Supply for LLS2.0

Model	Drawing	Size L×W×H(mm)	Input Voltage	Input Current	Output Voltage	Output Current	Output Power	Power Factor	Power Efficiency	Certification
DALI dimming driver										
SEL-BDD-V24-030S		377×21×19.5	100-277VAC 50/60Hz	0.38A Max	24VDC	1.25A Max	30W	>0.95	83%	CB/CE/SAA
SEL-BDD-V24-065S		346×30×23.5	100-277VAC 50/60Hz	0.8A Max	24VDC	2.7A Max	65W	>0.95	88%	CB/CE/SAA
SEL-BDD-V24-100S		373×39×27	100-277VAC 50/60Hz	1.15A Max	24VDC	4.2A Max	100W	>0.95	90%	CB/CE/SAA
3-In-1 dimming driver										
SEL-BSD-V24-030S		377×21×19.5	100~277VAC 50/60Hz	0.38A Max	24VDC	1.25A Max	30W	>0.95	83%	CB/CE/SAA
SEL-BSD-V24-065S		346×30×23.5	100~277VAC 50/60Hz	0.8A Max	24VDC	2.7A Max	65W	>0.95	88%	CB/CE/SAA
SEL-BSD-V24-100S		373×39×27	100~277VAC 50/60Hz	1.15A Max	24VDC	4.2A Max	100W	>0.95	90%	CB/CE/SAA
SEL-BSD-V48-065S		346X29.5X23.5	220~240VAC 50/60Hz	0.35A Max	48VDC	1.35A Max	65W	>0.9	86%	CE
SEL-BSD-V48-100S		346X29.5X23.5	220~240VAC 50/60Hz	0.52A Max	48VDC	2.1A Max	100W	>0.9	86%	CE
SEL-BSD-V48-150S		373X39X27	220~240VAC 50/60Hz	0.75A Max	48VDC	3.1A Max	150W	>0.9	91%	CE
SEL-BSD-V48-200S		373X39X27	220~240VAC 50/60Hz	0.98A Max	48VDC	4.15A Max	200W	>0.9	92%	CE
Non dimming driver										
SEL-FN-V24-030P		250×30×17	220~240VAC 50/60Hz	0.2A Max	24VDC	1.25A Max	30W	>0.95	86%	CB/CE
SEL-FN-V24-060P		312×30×18	220~240VAC 50/60Hz	0.35A Max	24VDC	2.5A Max	60W	>0.95	91%	CB/CE
SEL-FN-V24-100P		312×30×18	220~240VAC 50/60Hz	0.6A Max	24VDC	4.16A Max	100W	>0.95	92%	CB/CE

Highlight


LLS2.0 Upgrade




Flexible diffuser:
50M/roll, flexible diffuser, meet the requirement of different applications.




Surface mouting:
luminaire can fit the wall seamlessly, the installation and maintenance are easy and efficient.

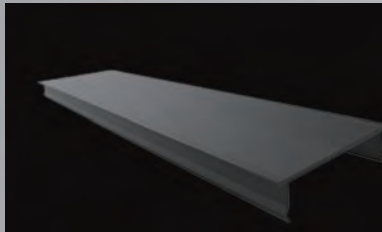


Black diffuser:
Integrated with architecture, provides lighting effect without seeing the luminaire.

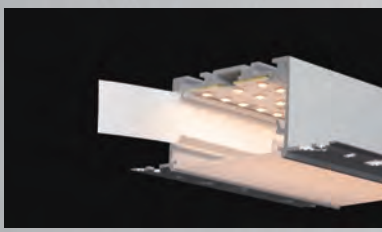


Luminous efficiency improved:
Reflective paper is attached on the flanks of the profile, which can optimize and improve the luminous efficiency, and meet higher lighting requirements.

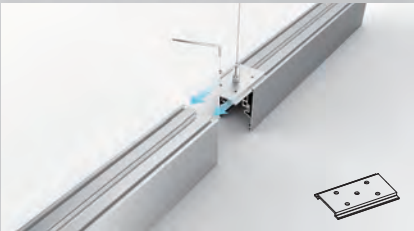


Interconnection of luminaire:
The brand-new interconnection accessory, interconnection of the luminaire without disassembly, convenient and efficient.

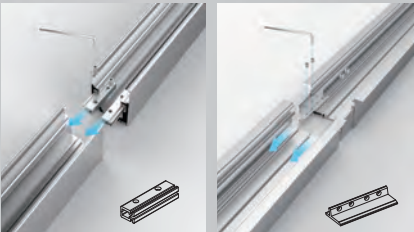


Interconnection of profile:
New-added interconnection accessory of profile, the screws can be turned from the front of profile, convenient and efficient.

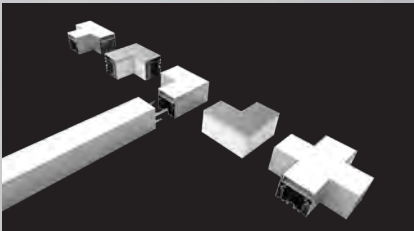

Connectors:
Multiple optional standard connectors, and any other special angle (L-shape, T-shape, X-shape and other angles) can be customized; seamless connection with appealing design.

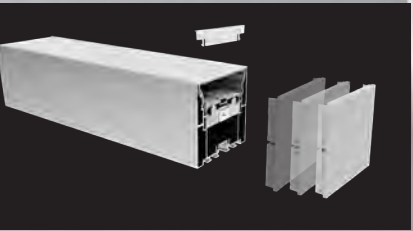

Magnetic End Cap:
Magnetic absorption design, connect in seconds; Minimalist and trendy appearance without screws.

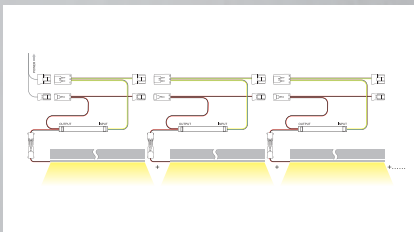


Integrated Track Cabling:
Integrated track cabling solution, save effort and time, includes dimming and non-dimming.




Professional Matching Tool:
Professional matching tool of diffuser installing, used for ultra-long application of pendant, surface mounted, save time and complete easily.

Linear Lighting Solution

Light source



Flexible strip



Rigid module



Tonning rigid module


Other Brands: TRIDONIC PHILIPS OSRAM

Installation

Wall mounted




Recessed without trim



Recessed with trim



Pendant




Surface mounted



Integrated track cabling



Beautiful overall effect

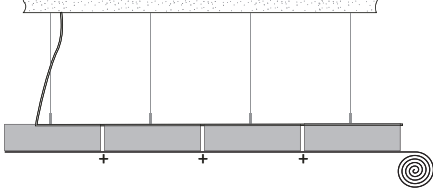


Quick connector




Convenient Connection

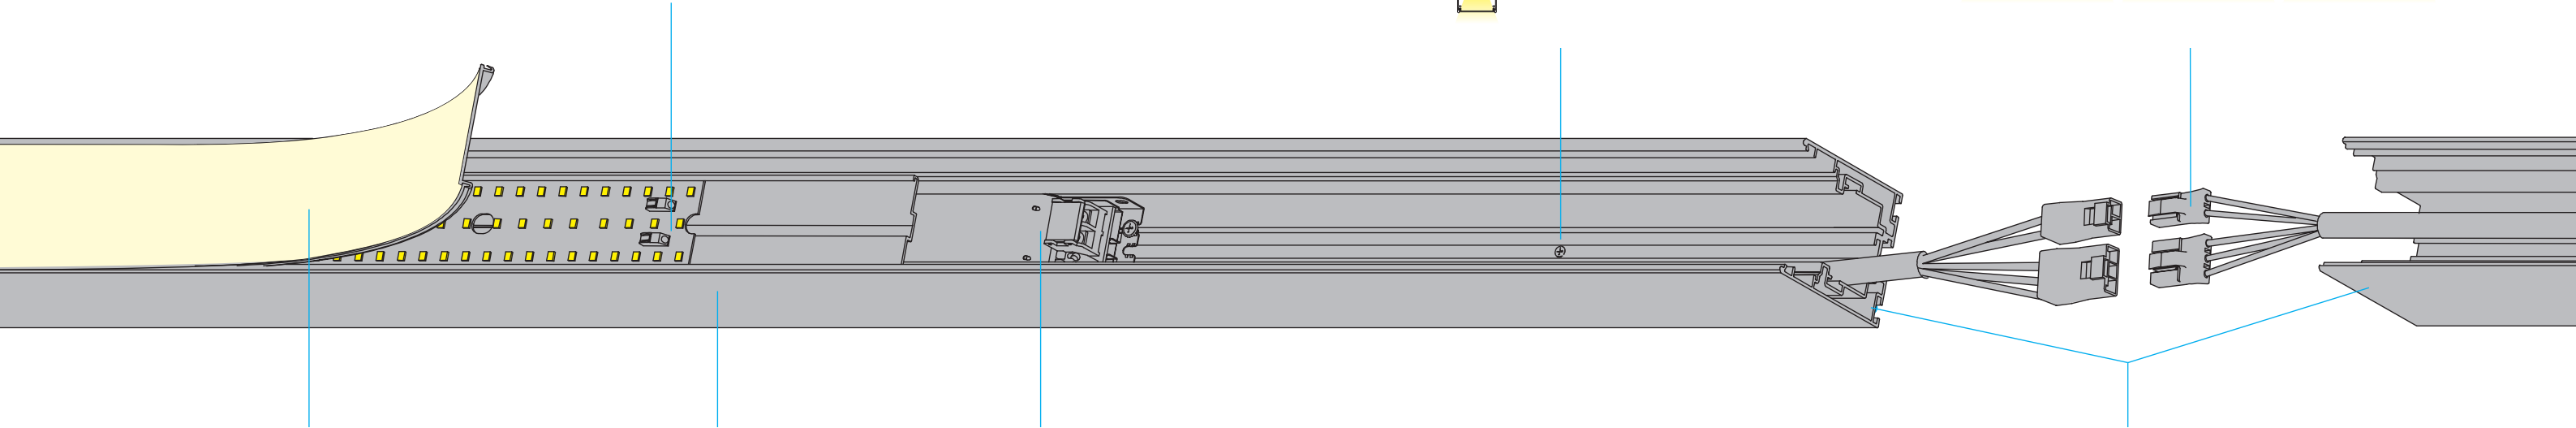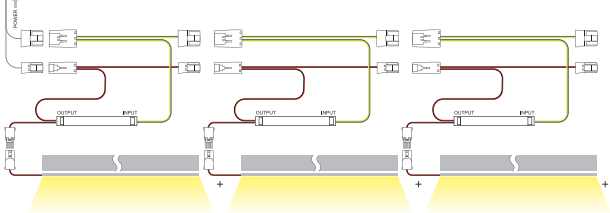

Diffuser




General diffuser
PC material/2.5M



Black diffuser
PC material/2.5M




Aluminium blind diffuser
AL6063/2.5M




Flexible diffuser
PC material/50M


Profile




LS series



LE series



LR series



LR series



LT series

Power supply



0-10V/PWM/Resistor dimming



DALI-dimming




Non-dimming

Other Brands: TRIDONIC PHILIPS OSRAM

Interconnection

Vertical connectors




7-typeN90ä 7-typeN120ä 7-typeN60ä

Horizontal connectors




X-typeN90ä X-typeN60ä+120ä Y-typeN120ä L-typeN90ä L-typeN60ä L-typeN120ä T-typeN60ä+120ä T-typeN90ä 180äExtender

Profile interconnection



EX-23 EX-17

Luminaire interconnection




EX-24

Customized corner



L90 L90N L90W T90 X90

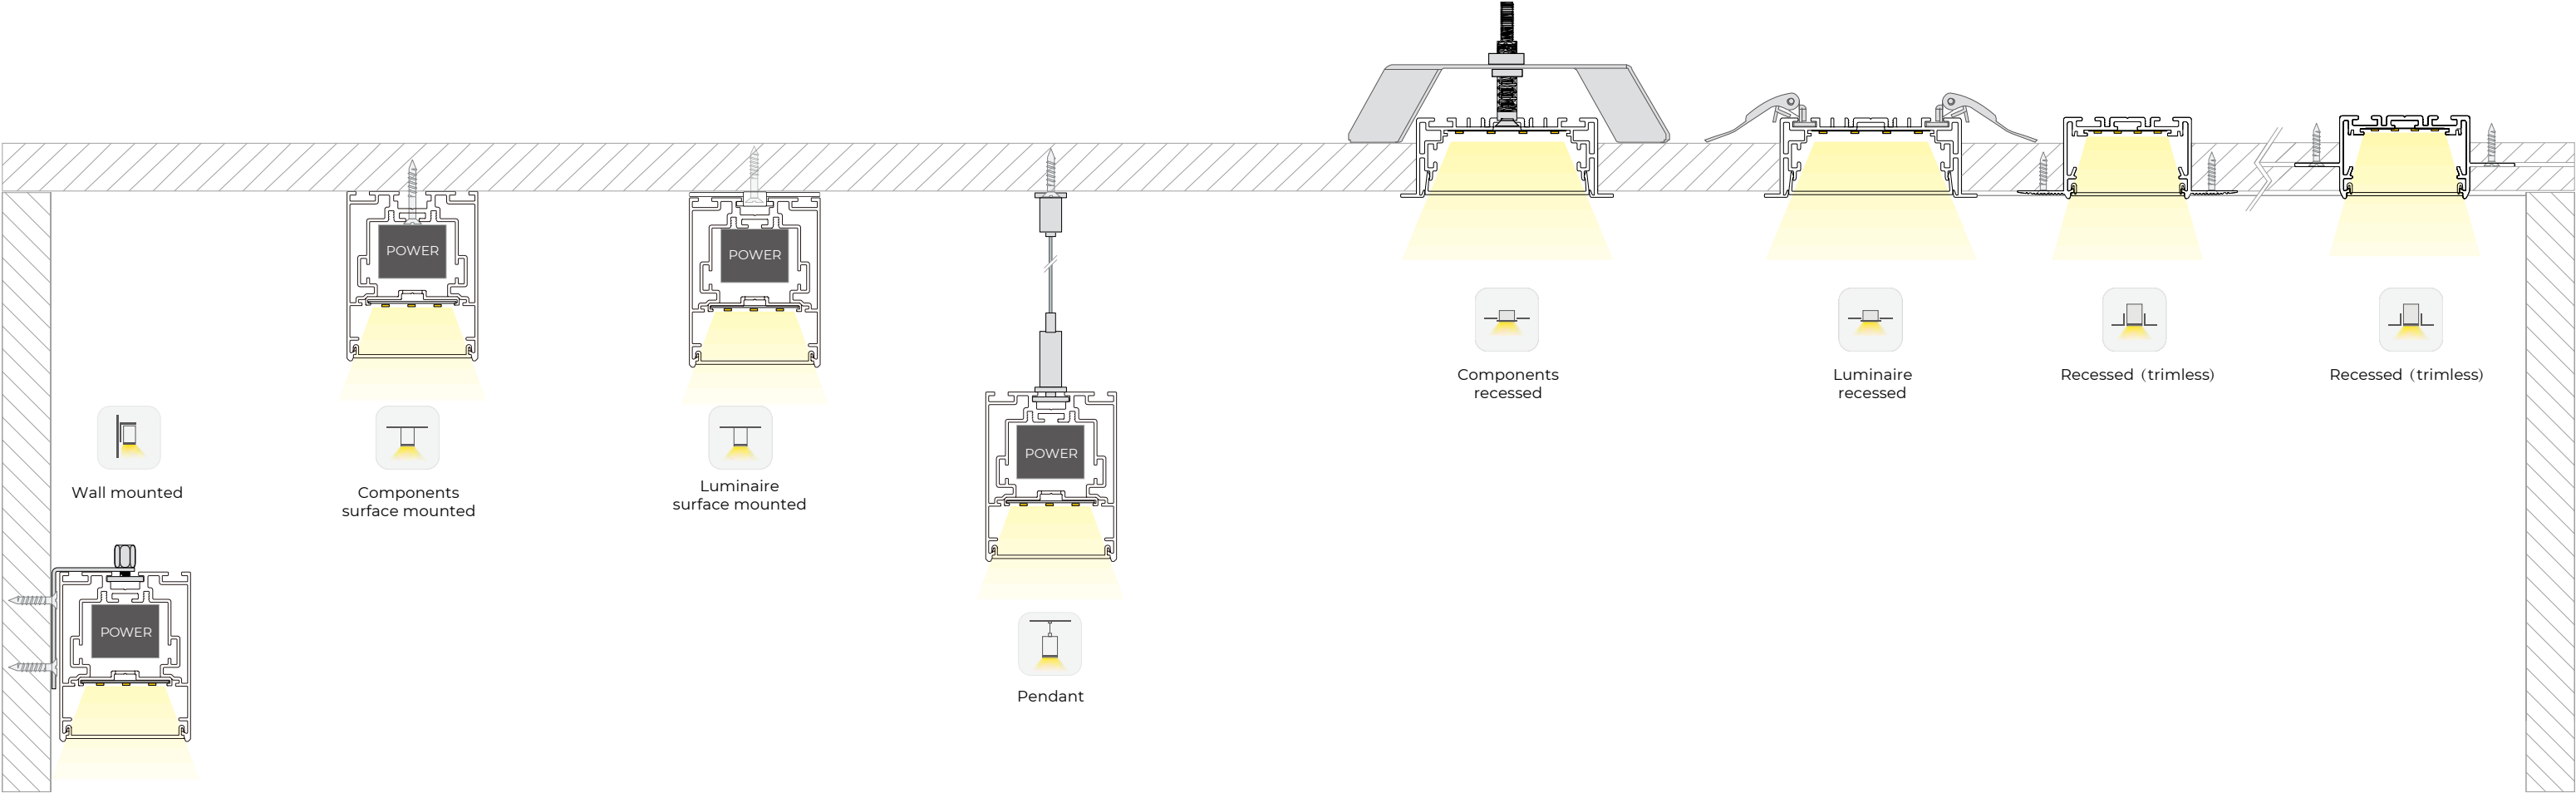


Stylish Lighting Application

Extension of Straight Line


Available for single luminaire use, in orderly Arrangement and ultra-long interconnection for limitless extension.



Single luminaire use, any size can be customized.

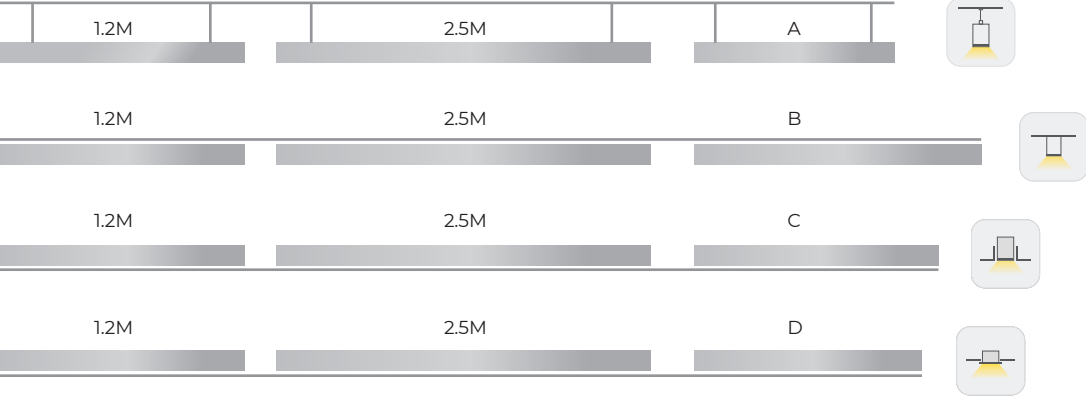


Ultra long interconnection, no light leakage with the 50m flexible diffuser.

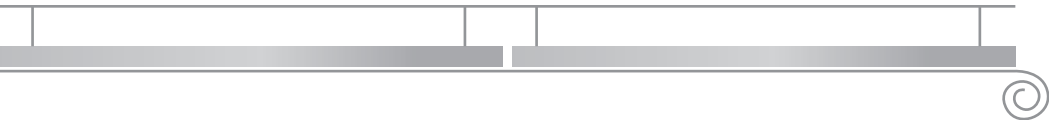

Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward.

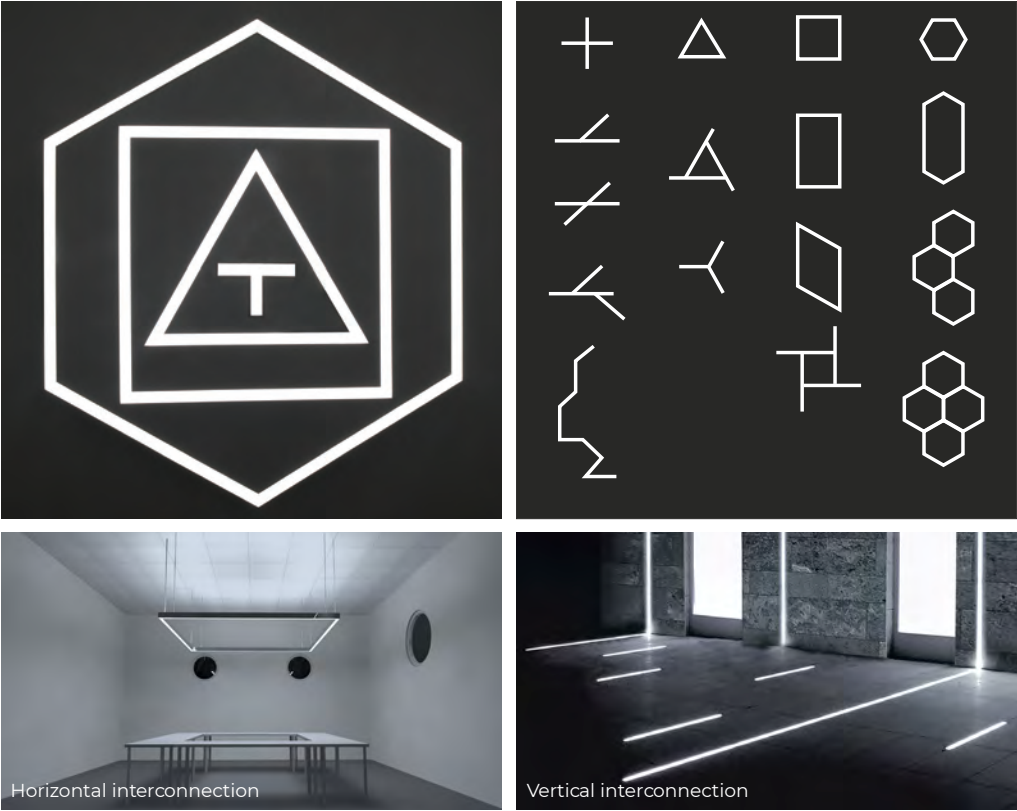


3D Style

Shuttle freely along the edge of ceiling& wall& floor




SEL-LS3360

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted



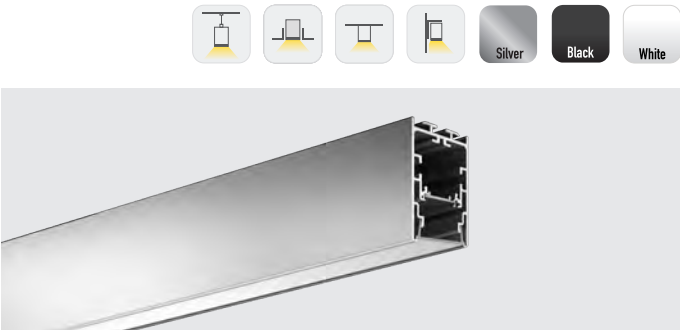


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%

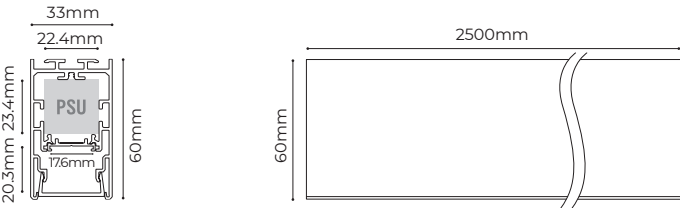


Profile Components ③	
Profile & Carrier 1	L250 0Å W33Å H60mm 
Diffuser 1	L250 0Å W26.6Å H10.2mm 
End cap 2	EC-LS3360 L33Å W60Å H11.5mm 
Quick locker 4	BK-01 L22Å W14Å H13mm 

Lighting Source	
Flexible Strip 	
Model	CRI LumensU Voltage Typ.power Size LEDs/meter Cutting unit
D8280-24V-15mm	λ 80 2700LM/m 24V 20W/m 2500Å 15Å 1.5mm 280LEDs 14 LEDs/50mm
Rigid modular 	
Model	CRI LumensU Voltage Typ.power Size LEDs/meter Cutting unit
DY8280-24V-17mm	λ 80 2700LM/m 24V 20W/m 499Å 17Å 5.6mm 280LEDs 14 LEDs/50mm

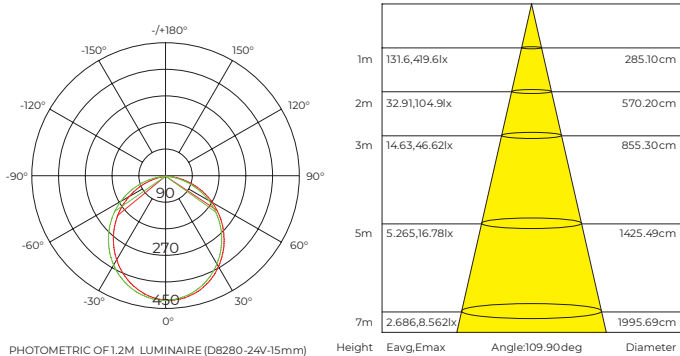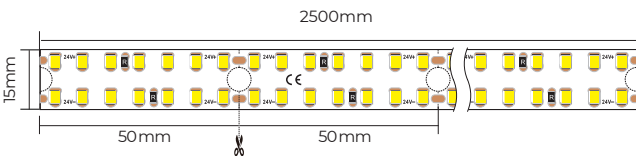

Installation Accessories		
Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	
Recessed buckle	RE-01 89Å 25Å 75mm	
Wall-mounted buckle	WL-01 50Å 18Å 34mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-01	
Reflective paper	BG-13 15000Å 16Å 0.075mm	

Customizable interconnected corners ③		
"L"-type	L90-LS3360 100Å 100Å 60mm	
"L"-type (inner)	L90N-LS3360 100Å 100Å 33mm	
"L"-type (exterior)	L90W-LS3360 100Å 100Å 33mm	
"T"-type	T90-LS3360 150Å 100Å 60mm	
"X"-type I	X90-LS3360 150Å 150Å 60mm	

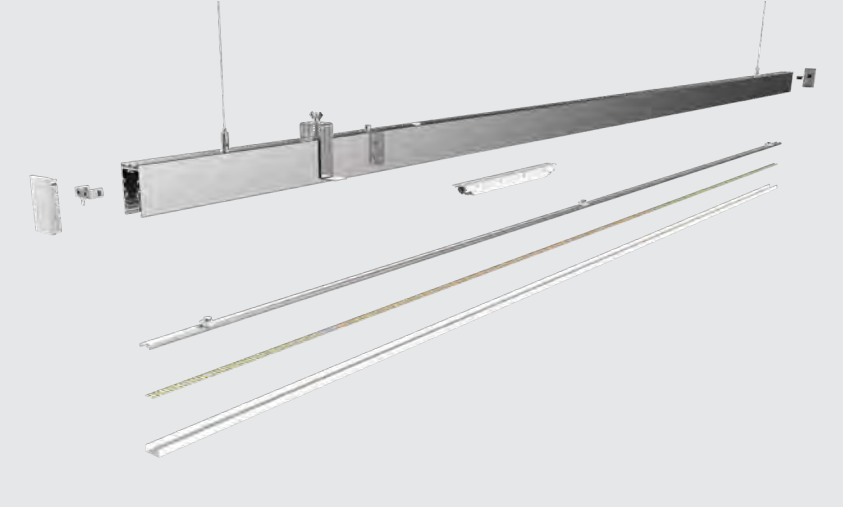

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	377Å 21Å 19.5mm	24VDC	30W	
BDD-V24-030S	377Å 21Å 19.5mm	24VDC	30W	

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type														
LLS	-	Pendant mounted	LS	3360	Flat	F	Diffuser	D	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL Individual	D	Customized	C												
											White	W									24VDC Flexible strip	F	2300K	LW	>90	9							DALI Dimming	A	Non dimming	N	SEL Individual	D	Customized	S				
											Black	B											2700K	SW	DALI Dimming	A							Non dimming	N							SEL Individual	D	Customized	S
											3000K	WW																																
											3500K	PW																																
											4000K	NW																																
											5000K	DW																																
6000K	W																																											
LLS	-		LS	3360		F		D		F		S		S	2500	-		R		20		LW		8		D	-		D		C													
LLS	-		LS	3360		F		D		F		S		S	2500	-											-		B		C													

Ordering profile components SEL-LLS-LS3360FDFSS2500-BC




Ordering luminaires kits

SEL-LLS-LS3360FDFSS2500-R20LW8D-DC




SEL-LS4067

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted



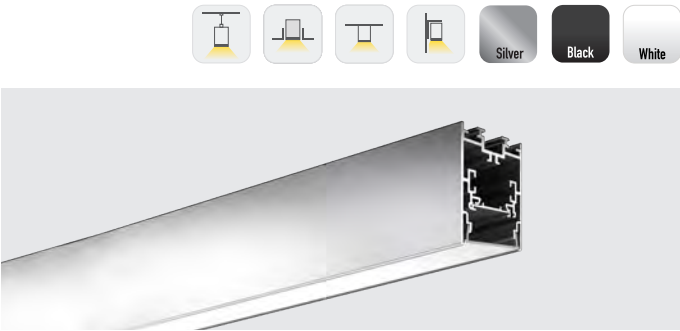


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%

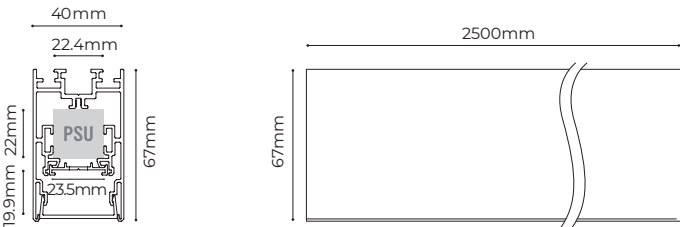

Profile Components	
Profile & Carrier	L2500 W40 H67mm 
Diffuser	L2500 W342 H10.2mm 
End cap	EC-LS4067 L40 W67 H11.5mm 
Quick locker	BK-01 L22 W14 H13mm 

Lighting Source	
Flexible Strip	
Model	CRI Lumens Voltage Typ.power Size LEDs/meter Cutting unit
D8280-24V-20mm	λ 80 2700LM/m 24V 20W/m 2500 W20 H15mm 280LEDs 14 LEDs/50mm
Rigid modular	
Model	CRI Lumens Voltage Typ.power Size LEDs/meter Cutting unit
DY8280-24V-23mm	λ 80 2700LM/m 24V 20W/m 499 W23 H5.6mm 280LEDs 14 LEDs/50mm

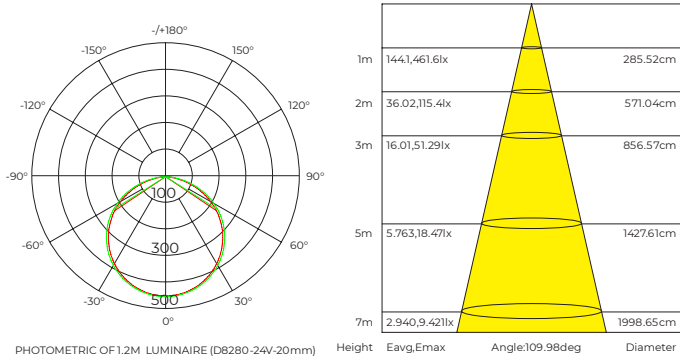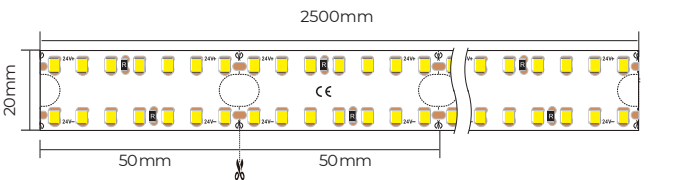

Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-02 96 W25 H79mm	
Wall-mounted buckle	WL-02 50 W18 H34mm	
Surface mounted buckle	CL-08 72 W54 H5.9mm	
Screw set	CL-01 M3.5 W40mm	
Cable clip	BG-01	
Reflective paper	BG-13 1500 W16 H0.075mm	

Customizable interconnected corners		
"L"-type	L90-LS4067 100 W100 H67mm	
"L"-type (inner)	L90N-LS4067 100 W100 H40mm	
"L"-type (exterior)	L90W-LS4067 150 W150 H40mm	
"T"-type	T90-LS4067 150 W100 H67mm	
"X"-type	X90-LS4067 150 W150 H67mm	



Standard extenders					
180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50 W10 H10mm				

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	37 W2 W19.5mm	24VDC	30W	
BDD-V24-030S	37 W2 W19.5mm	24VDC	30W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type										
LLS	-	Pendant mounted	LS 4067	Flat	F	Diffuser D	Flat F	Silver S	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C	
							White W	White W						24VDC Flexible strip	F			2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S	
							Black B	Black B										2700K	SW			Non dimming	N					
																		3000K	WW									
																		3500K	PW									
																		4000K	NW									
																		5000K	DW									
																		6000K	W									
LLS	-		LS 4067		F	D	F	S			S	2500	-		R		20		LW		8		D	-		D		C
LLS	-		LS 4067		F	D	F	S			S	2500	-										-		B			



Ordering profile components SEL- LLS-LS4067FDFSS2500-BC Ordering luminaires kits SEL-LLS-LS4067FDFSS2500-R20LW8D-BC

SEL-LE5535

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

Basic Parameters		
Profile material	AL6063-T5	
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 	
Diffuser material	PC	
Heat dissipation capability	Max 33W/m	
Transmittance	>85%	

Profile Components ②		
Profile ①	L2500Å W55Å H35mm	
Diffuser ①	L2500Å W342Å H10.2mm	
End cap ②	EC-LE5535 L55Å W35Å H18mm	

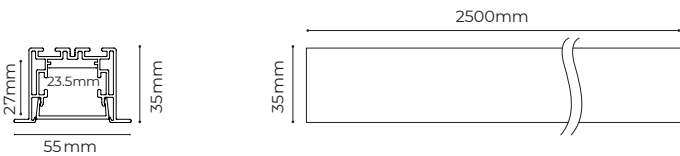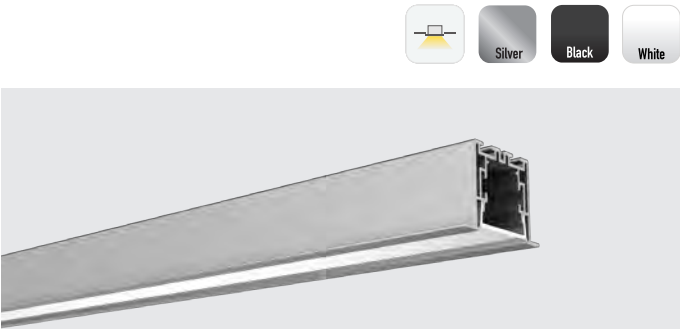




Lighting Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	2500Å 20Å 1.5mm	280LEDs	14 LEDs/50mm
DS8320-48V-20mm	λ 80 λ 90	3100LM/m	48V	20W/m	2500Å 20Å 1.5mm	320LEDs	16 LEDs/50mm

Rigid modular

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-23mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	499Å 23Å 5.6mm	280LEDs	14 LEDs/50mm

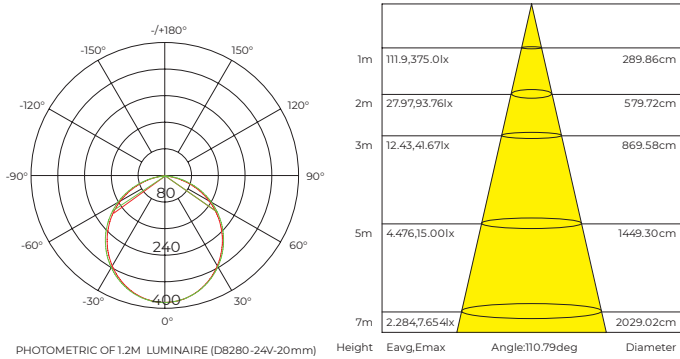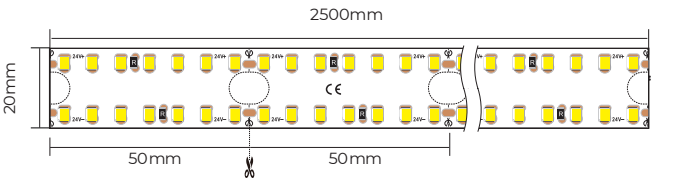

Installation Accessories		
Recessed Accessories (N-shaped buckle)	RN-04 107.3Å 45Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

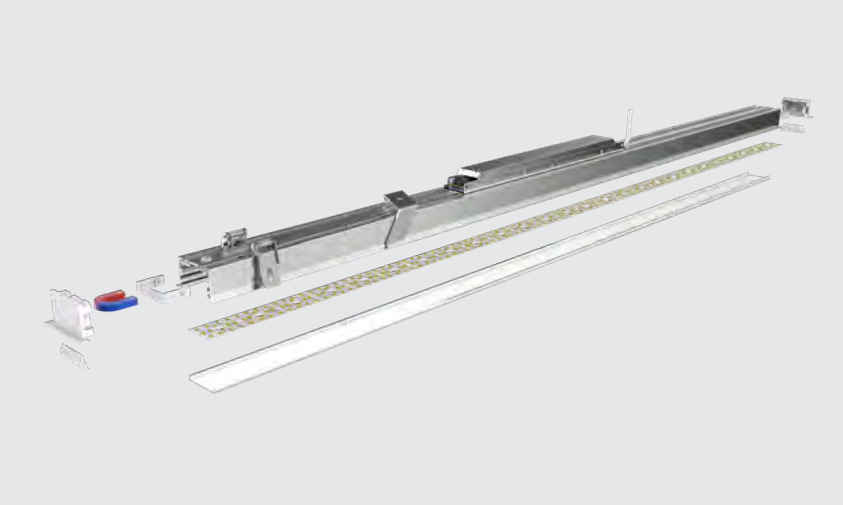

Customizable interconnected corners ③		
"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-060P	305Å 30Å 17mm	24VDC	60W	
BSD-V24-065S	346Å 30Å 23.5mm	48VDC	65W	
BSD-V24-100S	346Å 30Å 23.5mm	48VDC	100W	

- ② Parts of profile components can be purchased separately
- Ⓐ The luminous flux is the testing result of 4000K product
- ③ Customizable corner
- ④ Can select power supply with lower power according to the actual power of luminaires

Ordering Code																																
Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Recessed with trim	LE	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C		
											White	W																				
											Black	B																				
LLS	-		LE	5535		F		D		X		S		S	2500	-			R		20		LW		8		D	-		D		C
LLS	-		LE	5535		F		D		X		S		S	2500	-										-		B		C		

Ordering profile components SEL-LLS-LE5535FDXSS2500-BC Ordering luminaires kits SEL-LLS-LE5535FDXSS2500-R20LW8D-DC



SEL-LS5470(F)

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- 50m/roll flexible diffuser, PC diffuser, aluminium blind diffuser
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>75%

Profile Components ②	
Profile 1	L2500Å W54Å H70mm 
Diffuser 1	L2500Å W47.5Å H10mm 
Flexible diffuser	CV-LS5470FD50000(F) L50000Å W47.5Å H10mm 
Aluminium blind diffuser	CV-LS5470FB2500(F)-S L2500Å W47.5Å H10mm 
Black diffuser	CV-LS5470FC2500(F)-B L2500Å W47.5Å H10mm 
End cap 2	EC-LS5470(F) L54Å W70Å H11.5mm 

Quick locker 4	BK-02 L32Å W22Å H13mm 
----------------	--

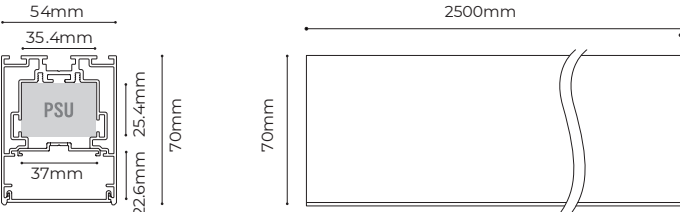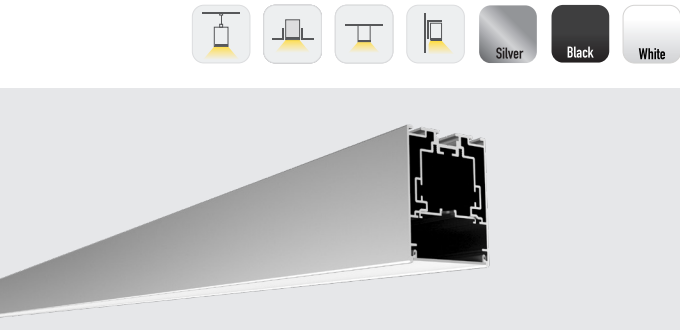


Lighting Source	
Flexible Strip	
Model	CRI Lumens ̑ Voltage Typ.power Size LEDs/meter Cutting unit
D8280-24V-34mm	λ 80 3250LM/m 24V 25W/m 2500Å 34Å 1.5mm 280LEDs 14LEDs/50mm
D8560SWW-24V-34mm	λ 80 2740LM/m 24V 25W/m 2500Å 34Å 1.5mm 560LEDs 28LEDs/50mm
DS8320-48V-34mm	λ 80 3500LM/m 48V 25W/m 2500Å 34Å 1.5mm 320LEDs 16LEDs/50mm
Rigid modular	
Model	CRI Lumens ̑ Voltage Typ.power Size LEDs/meter Cutting unit
DY8280-24V-36mm	λ 80 3250LM/m 24V 25W/m 299Å 36Å 5.6mm 280LEDs 14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80 2740LM/m 24V 25W/m 499Å 36Å 5.6mm 560LEDs 28LEDs/50mm

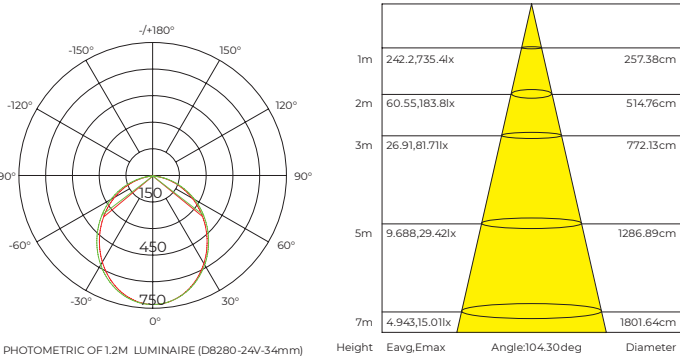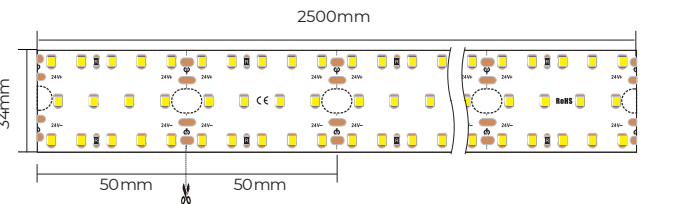

Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-03 110Å 25Å 82mm	
Surface mounted buckle	WL-02 50Å 18Å 34mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	CL-06 90.5Å 54Å 5.9mm	
Reflective paper	15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners ③		
"L"-type	L90-LS5470(F) 100Å 100Å 70mm	
"L"-type (inner)	L90N-LS5470(F) 100Å 100Å 54mm	
"L"-type (exterior)	L90W-LS5470(F) 150Å 150Å 54mm	
"T"-type	T90-LS5470(F) 150Å 100Å 70mm	
"X"-type	X90-LS5470(F) 150Å 150Å 70mm	

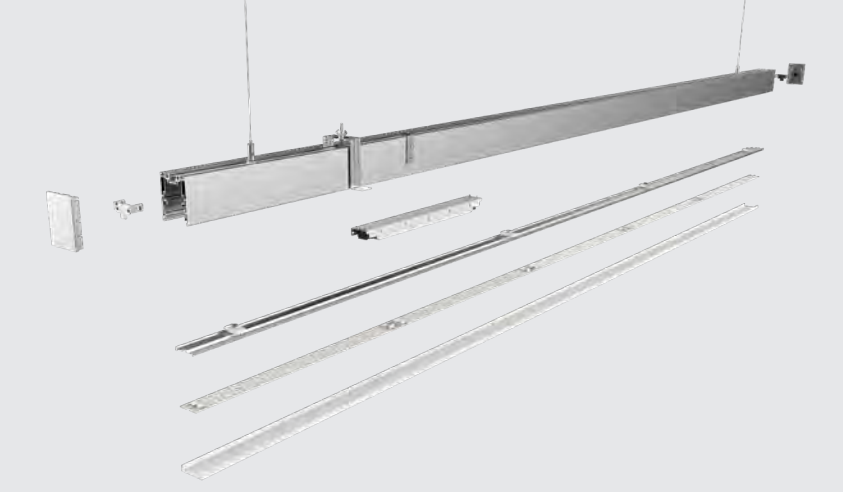

Standard extenders				
180° extender	EX-E1		"Y"-type (120°)	EX-E9 
"T"-type (90°)	EX-E4		"T"-type (60°-120°)	EX-E12 
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2 
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5 
"X"-type (60°-120°)	EX-E11		"7"-type (60°)	EX-E7 
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6 
Splice bar	EX-23 50Å 10Å 10mm		Whole lamp splice 80Å 50Å 6mm	EX-24 

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

② Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
⑤ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type										
LLS	-	Recessed with trim	LS 5470	Flat	F	Diffuser D	Flat	F	Silver	S	Holeless end cap	S	2500mm	N FE	-	24VDC Rigid module	R	25W/m	25	1900K	CW	>80	B	3-in-1 Dimming	D	SEL Whole	B	SEL	C
																				2300K	LW	>95	H	DALI Dimming	A	SEL Individual	D	Customized	S
																				2700K	SW			Non dimming	N				
																				3000K	WW								
																				3500K	PW								
																				4000K	NW								
																				5000K	DW								
LLS	-		LS 5470	F	D	F	S		S 2500	(F)	-	R	25		LW	8		D -	D	C									
LLS	-		LS 5470	F	D	F	S		S 2500	(F)	-							-	B	C									

Ordering profile components SEL-LLS-LS5470FDFSS2500(F)-BC



Ordering luminaires kits SEL-LLS-LS5470FDFSS2500(F)-R25LW8D-10

SEL-LE6935(F)




- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>85%


Profile Components ③	
Profile 1	L2500Å W69Å H35mm 
Diffuser 1	475Å 10Å 2500mm 
Flexible diffuser	CV-LE6935FD50000(F) L50000Å W475Å H10mm 
Aluminium blind diffuser	CV-LE6935FB2500(F)-S L2500Å W475Å H10mm 
Black diffuser	CV-LE6935FC2500(F)-B L2500Å W475Å H10mm 
End cap 2	EC-LE6935(F) L69Å W35Å H22mm 

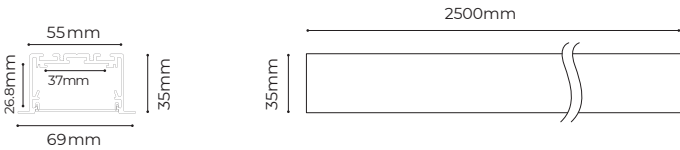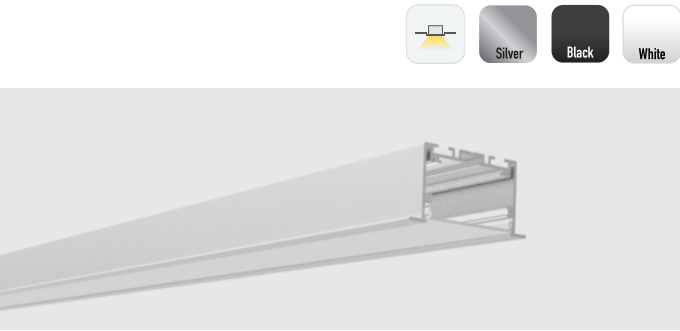

Lighting Source									
Flexible Strip									
Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m		24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm	
D8560SWW-24V-34mm	λ 80	2740LM/m		24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm	
DS8320-48V-34mm	λ 80 λ 90	3500LM/m		48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm	
Rigid modular									
Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m		24V	25W/m	499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm	
DY8560SWW-24V-36mm	λ 80	2740LM/m		24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm	

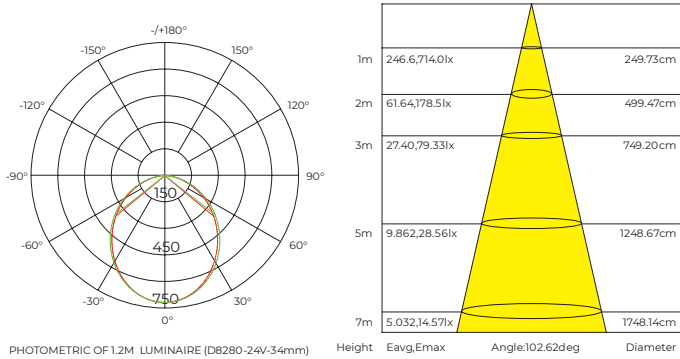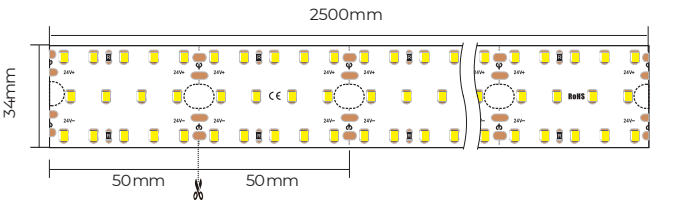


Installation Accessories		
Recessed Accessories (N-shaped buckle)	RN-05 99.8Å 59Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	
Integrated track cabling accessories	CM-XX	

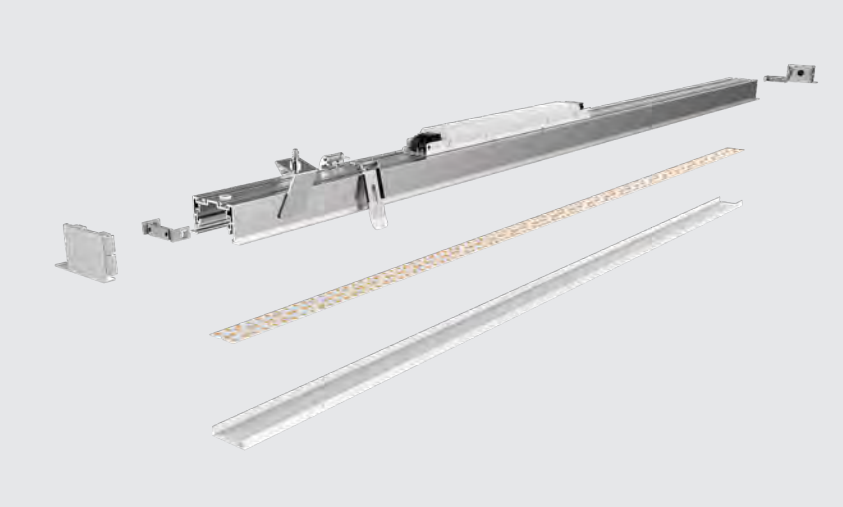

Customizable interconnected corners ③		
"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

③ Parts of profile components can be purchased separately
④ The luminous flux is the testing result of 4000K product
⑤ Customizable corner
⑥ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Recessed with trim	LS	6935	Flat	F	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	N	FE	-	24VDC Rigid module	R	25W/m	25	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	SEL	C		
						No diffuser	X		White	W	24VDC Flexible strip											F	2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
									Black	B													2700K	SW			Non dimming	N				
																							3000K	WW								
																							3500K	PW								
																							4000K	NW								
																							5000K	DW								
											6000K											W										
LLS	-		LS	6935	F	D	X	S	S	2500	(F)	-	R	25		LW	8	D	-	D	C											
LLS	-		LS	6935	F	D	X	S	S	2500	(F)	-					-	B	C													


Ordering profile components SEL-LLS-LE6935FDXSS2500(F)-BC Ordering luminaires kits SEL-LLS-LE6935FDXSS2500-R25LW8D(F)-DC

SEL-LR5535(A)



- Several optional diffuser: general PC diffuser, flexible PC diffuser, black diffuser, aluminium blind diffuser
- 50mm large luminous surface, trimless recessed design,integrated into architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profile with high-quality surface treatment, black, white and silver are optional
- Multiple optional connectors:180° direct connection, L type, T type, X type

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>86%


Profile Components ⑥	
Profile 1	L2500Å W95Å H35mm 
Diffuser 1	L2500Å W47.5Å H10mm 
Flexible diffuser	CV-LR5535FD50000(A) L50000Å W47.5Å H10mm 
Aluminium blind diffuser	CV-LR5535FB2500(A)-S L2500Å W47.5Å H10mm 
Black diffuser	CV-LR5535FC2500(A)-B L2500Å W47.5Å H10mm 
End cap 2	EC-LR5535(A) L55Å W35Å H22mm 

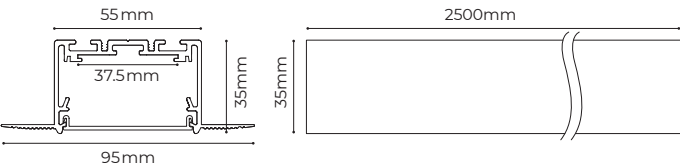

Lighting Source	
Flexible Strip 	
Model	CRI Lumens $\bar{U}$ Voltage Typ.power Size LEDs/meter Cutting unit
D8280-24V-34mm	λ 80 3250LM/m 24V 25W/m 2500Å 34Å 1.5mm 280LEDs 14LEDs/50mm
D8560SWW-24V-34mm	λ 80 2740LM/m 24V 25W/m 2500Å 34Å 1.5mm 560LEDs 28LEDs/50mm
DS8320-48V-34mm	λ 80 3500LM/m 48V 25W/m 2500Å 34Å 1.5mm 320LEDs 16LEDs/50mm
Rigid modular 	
Model	CRI Lumens $\bar{U}$ Voltage Typ.power Size LEDs/meter Cutting unit
DY8280-24V-36mm	λ 80 3250LM/m 24V 25W/m 499Å 36Å 5.6mm 280LEDs 14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80 2740LM/m 24V 25W/m 499Å 36Å 5.6mm 560LEDs 28LEDs/50mm

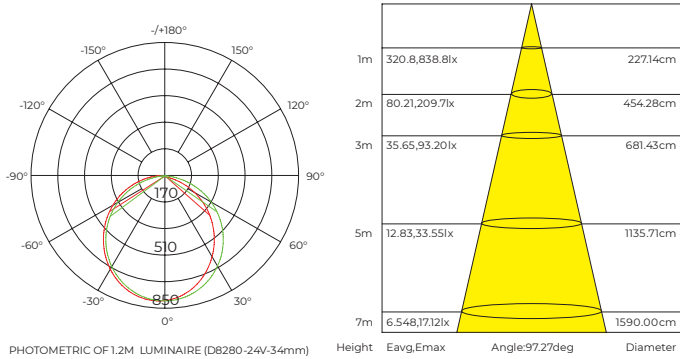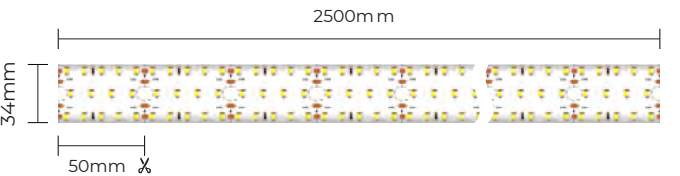

Installation Accessories		
Install screw	CL-01 3.5Å 30mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	

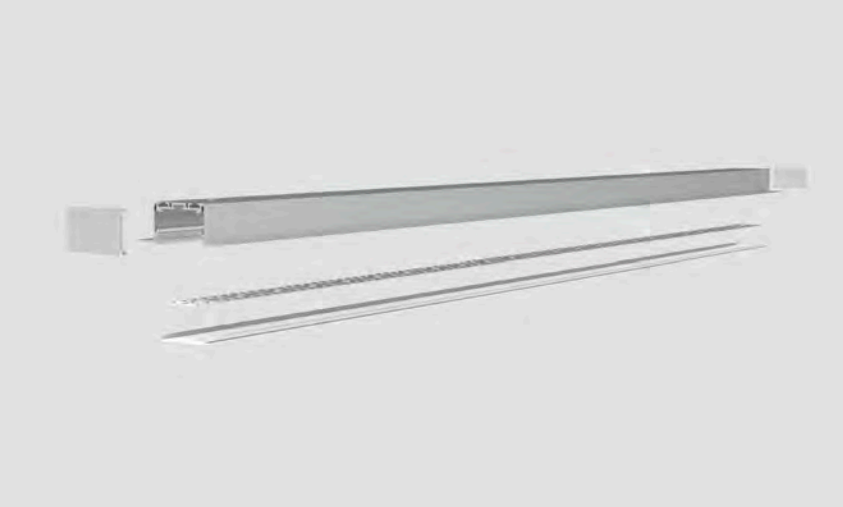

Customizable interconnected corners ③		
"L"-type	L90 -LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N -LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W -LE5535 100Å 100Å 55mm	
"T"-type	T90 -LE5535 150Å 107Å 35mm	
"X"-type	X90 -LE5535 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

⑥ Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
④ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Package	Label Type								
LLS	-	Trimless Recessed	LR	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	(A)	-	SEL Whole	B	SEL	C
							No diffuser	X			White	W						SEL Individual	D	Customized	S
							Black	B													
LLS	-		LR	5535		F		D		X		S		S	2500	(A)	-		B		C


Ordering profile components SEL-LLS-LR5535FDXSS2500(A)-BC

SEL-LR5535(B)

- Several optional diffuser: general PC diffuser, flexible PC diffuser, black diffuser, aluminium blind diffuser
- 50mm large luminous surface, trimless recessed design,integrated into architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profile with high-quality surface treatment, black, white and silver are optional
- Multiple optional connectors:180° direct connection, L type, T type, X type

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>86%

Profile Components ③		
Profile 1	L250 0Å W93Å H35mm	
Diffuser 1	L250 0Å W475Å H10mm	
Flexible diffuser	CV-LR5535FD50000(B) L50000Å W475Å H10mm	
Aluminium blind diffuser	CV-LR5535FB2500(B)-S L250 0Å W475Å H10mm	
Black diffuser	CV-LR5535FC2500(B)-B L250 0Å W475Å H10mm	
End cap 2	EC-LR5535(B) L55Å W35Å H22mm	

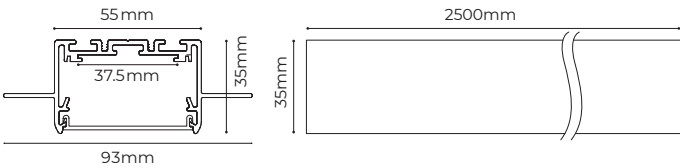



Lighting Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	λ 80	2740LM/m	24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm
DS8320-48V-34mm	λ 80 λ 90	3500LM/m	48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm

Rigid modular

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80	2740LM/m	24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm

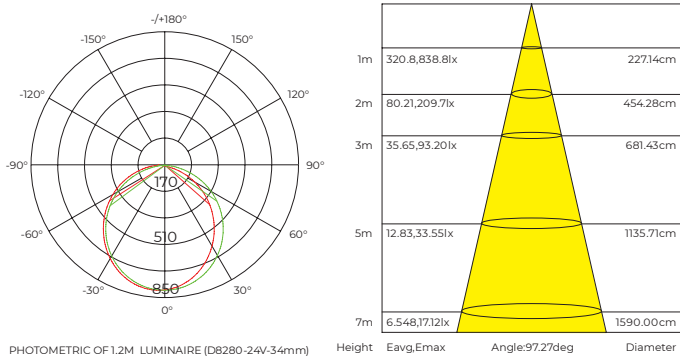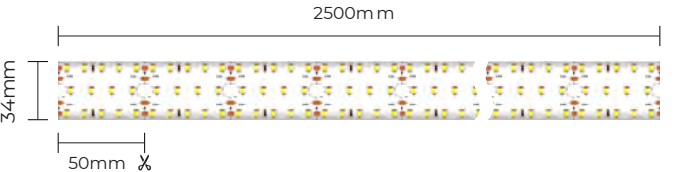


Installation Accessories		
Install screw	CL-01 3.5Å 30mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	

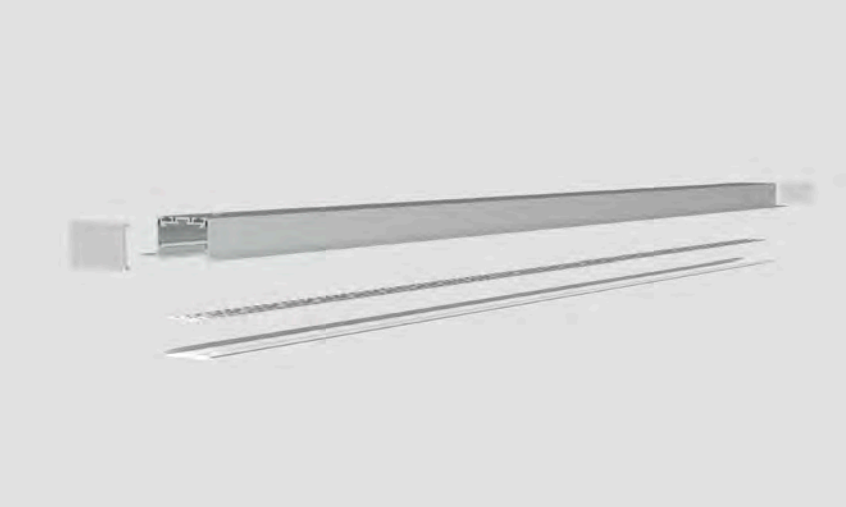

Customizable interconnected corners ③		
"L"-type	L90-LR5535(B) 107Å 107Å 35mm	
"L"-type (inner)	L90N-LR5535(B) 100Å 100Å 69mm	
"L"-type (exterior)	L90W-LR5535(B) 100Å 100Å 69mm	
"T"-type	T90-LR5535(B) 150Å 107Å 35mm	
"X"-type	X90-LR5535(B) 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

③ Parts of profile components can be purchased separately
ȳ The luminous flux is the testing result of 4000K product
④ Customizable corner
④ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Package	Label Type								
LLS	-	Trimless Recessed	LR	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	(B)	-	SEL Whole	B	SEL	C
							No diffuser	X			White	W						SEL Individual	D	Customized	S
							Black	B													
LLS	-		LR	5535		F		D		X		S		S	2500	(B)	-		B		C



Ordering profile components SEL-LLS-LR5535FDXSS2500(B)-BC

SEL-LS7977


- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 42W/m
Transmittance	>85%



Profile Components		
Profile & Carrier	L2500Å W79Å H77mm	
Diffuser	L2500Å W72.3Å H10mm	
End cap	EC-LS7977 L79Å W77Å H11.5mm	
Quick locker	BK-03 L48.5Å W22Å H9mm	

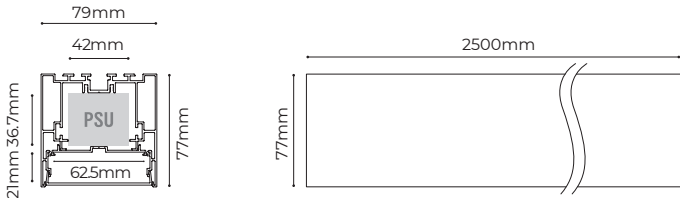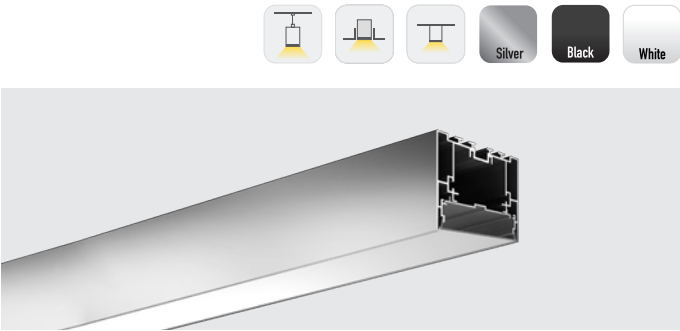

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	2500Å 59Å 1.5mm	420 LEDs	21 LEDs/50mm
DS8480-48V-59mm	λ 80 λ 90	4600 LM/m	48V	30W/m	2500Å 59Å 1.5mm	480 LEDs	16 LEDs/33.3mm
Rigid modular							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-62mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	499Å 62Å 5.6mm	420 LEDs	21 LEDs/50mm

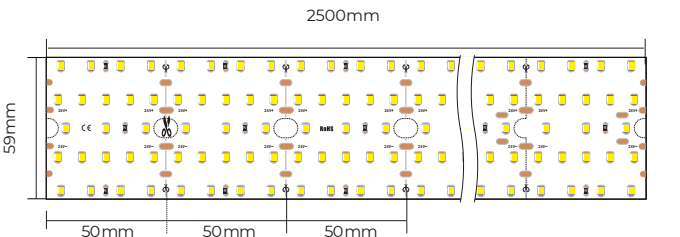

Temperature ambient: 25℃
LED strip: D8420-24V-59mm(30W/m)

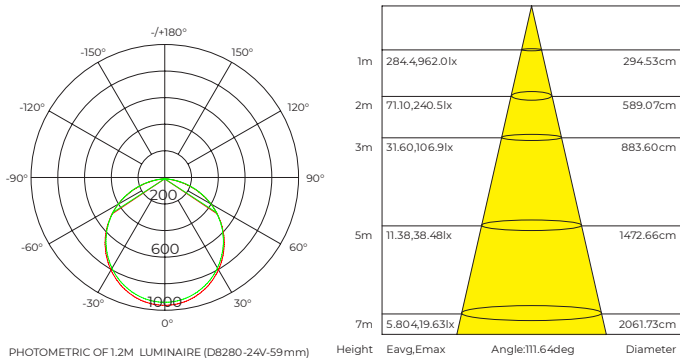


Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-04 135.4Å 25Å 90mm	
Surface mounted buckle	CL-09 126Å 54Å 5.9mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners		
"L"-type	L90-LS7977 150Å 150Å 77mm	
"L"-type (inner)	L90N-LS7977 150Å 150Å 79mm	
"L"-type (exterior)	L90W-LS7977 150Å 150Å 79mm	
"T"-type	T90-LS7977 200Å 150Å 77mm	
"X"-type	X90-LS7977 200Å 200Å 77mm	



Standard extenders					
180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type				
LLS	-	Pendant mounted	LS 7977	Flat	F	Diffuser D	Flat F	Silver S	Holeless end cap	S 2500mm	-	24VDC Rigid module	R 30W/m 30	1900K	GW	>80 8	3-in-1 Dimming	D	SEL Whole B	SEL C		
							White W					24VDC Flexible strip	F	2300K	LW	>90 9	DALI Dimming	A	SEL Individual D	Customized S		
							Black B							2700K	SW		Non dimming	N				
														3000K	WW							
														3500K	PW							
														4000K	NW							
														5000K	DW							
														6000K	W							
LLS	-		LS 7977		F	D	F	S		S 2500	-		R		30		LW	8		D -	D	C
LLS	-		LS 7977		F	D	F	S		S 2500	-									-	B	

Ordering profile components SEL-LLS-LS7977FDFSS2500-BC



Ordering luminaires kits

SEL-LLS-LS7977FDFSS2500-R30LW8D-BC



SEL-LE9435


- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%




Profile Components

Profile 1	L2500Å W94Å H35mm	
Diffuser 1	L2500Å W72.3Å H10mm	
End cap 2	EC-LE9435 L94Å W35Å H18mm	

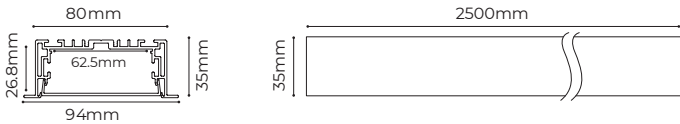


Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	2500Å 59Å 1.5mm	420 LEDs	21 LEDs/50mm
DS8480-48V-59mm	λ 80 λ 90	4600 LM/m	48V	30W/m	2500Å 59Å 1.5mm	480 LEDs	16 LEDs/33.3mm
Rigid modular							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-62mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	499Å 62Å 5.6mm	420 LEDs	21 LEDs/50mm

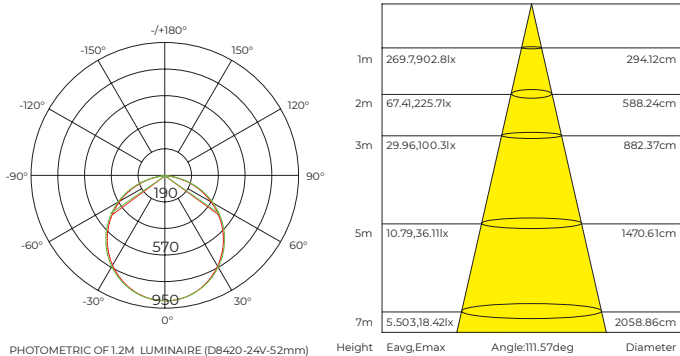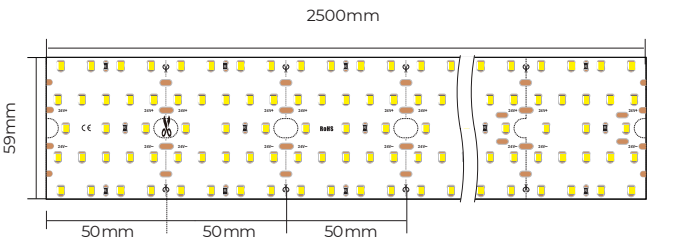

Installation Accessories

Recessed Accessories (N-shaped buckle)	RN-06 96Å 84Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Cable clip	BG-03	
Reflective paper	BG-12 15000Å 11.5Å 0.075mm	
Integrated track cabling accessories	CM-XX	

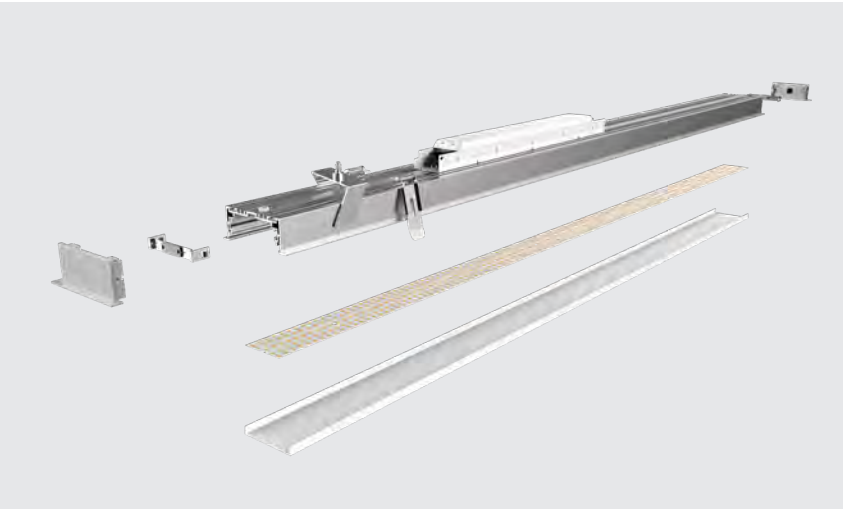


Customizable interconnected corners

"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders

180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type															
LLS	-	Recessed with trim	LE	9435	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	30W/m	30	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C			
											White	W					24VDC Flexible strip	F			2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S			
											Black	B					2700K	SW					Non dimming	N									
											3000K	WW																					
											3500K	PW																					
											4000K	NW																					
											5000K	DW																					
											6000K	W																					
LLS	-		LE	9435		F		D		X		S			S	2500	-		R		30			LW		8		D	-		D		C
LLS	-		LE	9435		F		D		X		S			S	2500	-										-		B				



Ordering profile components SEL-LLS-LE9435FDXSS2500-BC Ordering luminaires kits SEL-LLS-LE9435FDXSS2500-R30LW8D-DC

SEL-LS10570




- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%

Profile Components		
Profile & Carrier	L250 0Å W105Å H70mm	
Diffuser	L250 0Å W97Å H10mm	
End cap	EC-LS10570 L105Å W70Å H11.5mm	
Quick locker	BK-03 L32Å W48Å H13mm	

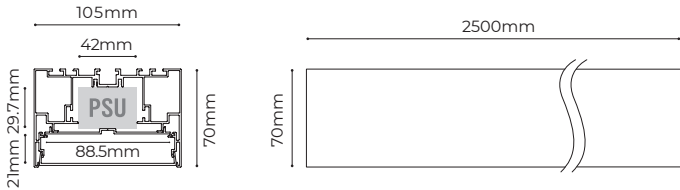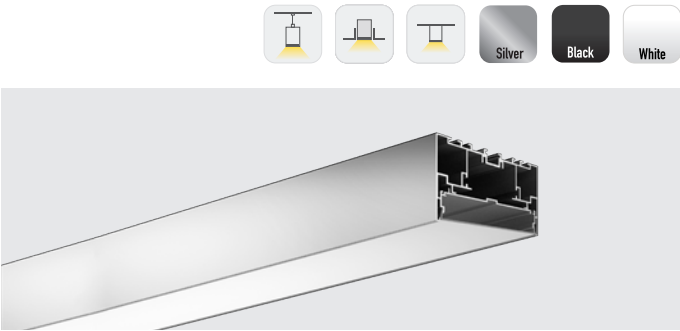


Lighting Source								
Flexible Strip								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D8560-24V-85mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	2500Å 85Å 1.5mm	560LEDs	28LEDs/50mm	
D58640-48V-85mm	λ 80 λ 90	6200LM/m	48V	40W/m	2500Å 85Å 1.5mm	640LEDs	32LEDs/50mm	
Rigid modular								
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
DY8560-24V-88mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	499Å 88Å 5.6mm	560LEDs	28LEDs/50mm	

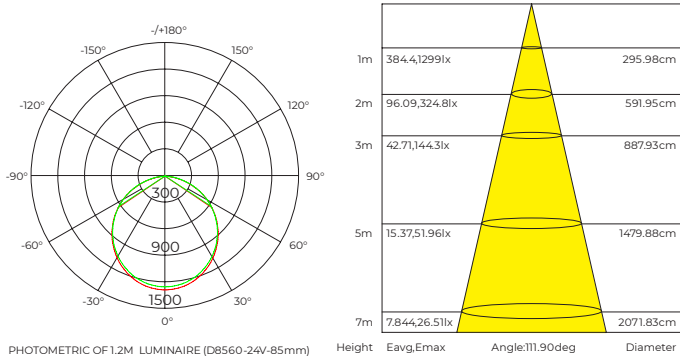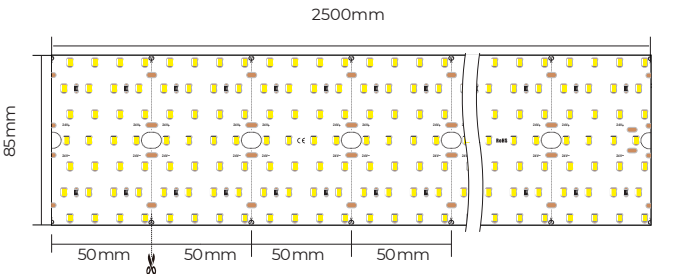


Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-05 161.4Å 25Å 83mm	
Surface mounted buckle	CL-10 163Å 54Å 5.9mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners		
"L"-type	L90-LS10570 150Å 150Å 70mm	
"L"-type (inner)	L90N-LS10570 150Å 150Å 105mm	
"L"-type (exterior)	L90W-LS10570 150Å 150Å 105mm	
"T"-type	T90-LS10570 200Å 150Å 70mm	
"X"-type	X90-LS10570 200Å 200Å 70mm	

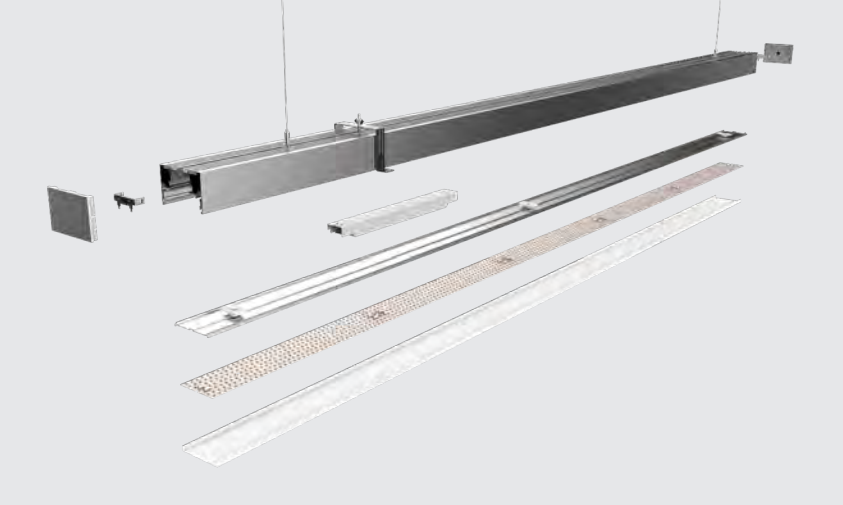

Standard extenders					
180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	


Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code																																		
Category	-	Series	Section Size	Diffuser Shape		Diffuser Nature		Carrier Style	Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type						
LLS	-	Pendant mounted	LS	10570	Flat	F	Diffuser D	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	40W/m	40	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C					
										White	W								24VDC Flexible strip	F	2300K	LW	>90							9	A	D	Customized	S
										Black	B										2700K	SW	Non dimming							N	Individual	Customized	S	
										3000K	WW																							
										3500K	PW																							
										4000K	NW																							
										5000K	DW																							
										6000K	W																							
LLS	-		LS	10570		F		D	F	S		S	2500	-		R		40		LW		8		D	-		D		C					
LLS	-		LS	10570		F		D	F	S		S	2500	-										-		B								


Ordering profile components SEL-LLS-LS10570FDFSS2500-BC
Ordering luminaires kits SEL-LLS-LS10570FDFSS2500-R40LW8D-DC

SEL-LS12335

- 120mm large luminous surface, high brightness output
- PC diffuser imported from Germany, producing homogenous & softlighting
- Luminaires interconnection can be realized, convenient installation
- Various installation ways: pendant, and surface mounted

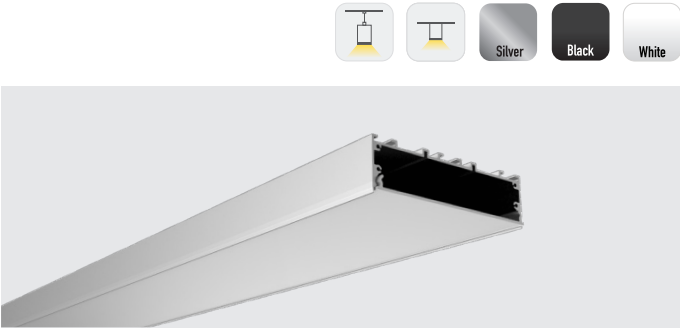




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%




Profile Components	
Profile & Carrier 1	L2500Å W123Å H35mm
Diffuser 1	L2500Å W120XH9.2mm

End cap 2	EC-LS12335 L123XW35XH2.5mm
-----------	-------------------------------

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8560-24V-85mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	2500Å 85Å 1.5mm	560LEDs	28LEDs/50mm
D58640-48V-85mm	λ 80 λ 90	6200LM/m	48V	40W/m	2500Å 85Å 1.5mm	640LEDs	32LEDs/50mm

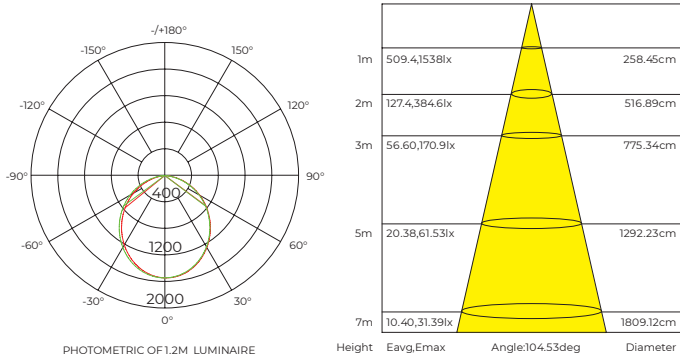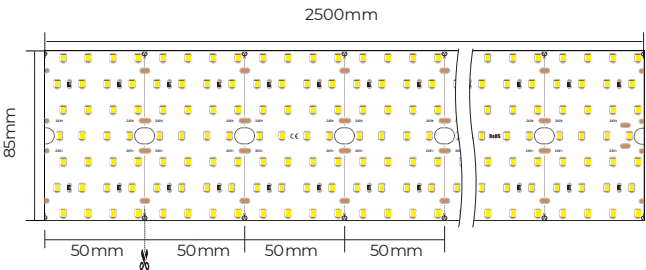

Installation Accessories		
Pendant cable (with junction box)	PY-FSXX 2m/4m	
Pendant cable	PN-FXX 2m/4m	
Surface mounted buckle	CL-07 189Å 54Å 5.7mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-03	

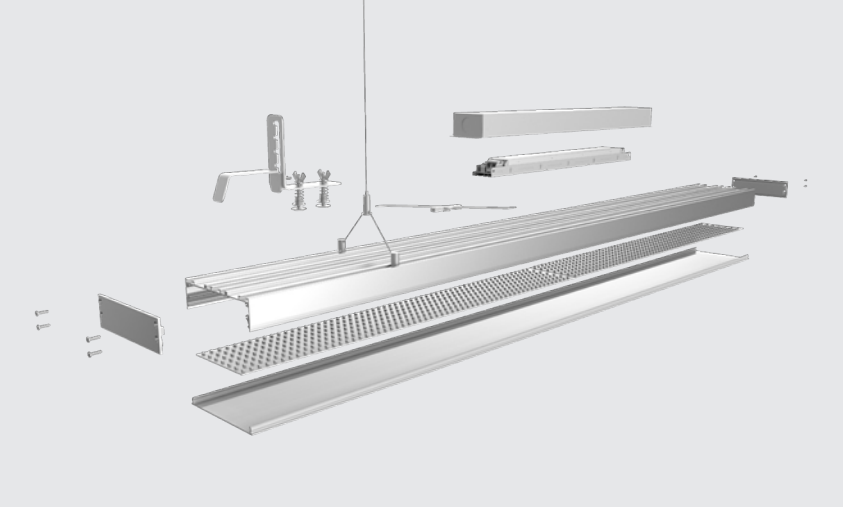

Standard extenders	
180Å extender	EX-16 50X118.3x6.2mm

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	


ø Parts of profile components can be purchased separately
Ű The luminous flux is the testing result of 4000K product
Ű Can select power supply with lower power according to the actual power of luminaires

Ordering Code																																				
Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type					
LLS	-	Pendant mounted	LS	12335	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	40W/m	40	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C						
											White	W									24VDC Flexible strip	F	2300K	LW							>90	9	A	D	Customized	S
											Black	B											2700K	SW								N				
																							3000K	WW												
																							3500K	PW												
																							4000K	NW												
																							5000K	DW												
																							6000K	W												
LLS	-		LS	12335		F		D		X		S		S	2500	-		R		40		LW		8		D	-		D		C					
LLS	-		LS	12335		F		D		X		S		S	2500	-										-		B		C						

Ordering profile components SEL-LLS-LS12335FDXSS2500-BC Ordering luminaires kits SEL-LLS-LS12335FDXSS2500-F40LW8D-DC


SEL-LT60

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

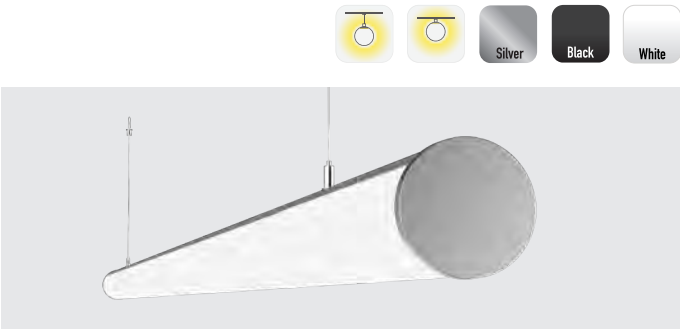

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%


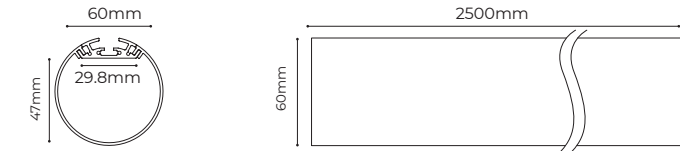


Profile Components

Profile X1	PR-LT60 2500mm	
Diffuser 1	CV-LT60 60x2500mm	
End cap 2	EC-LT60 63.4x8mm	


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	2500x20x15mm	280LEDs	14 LEDs/50mm
DS8320-48V-20mm	λ 80 λ 90	3100LM/m	48V	20W/m	2500x20x1.5mm	320LEDs	16 LEDs/50mm

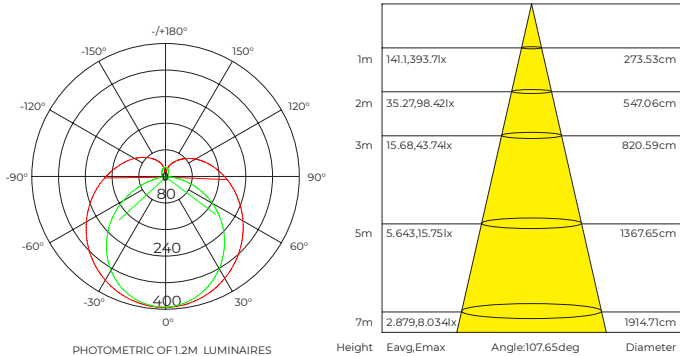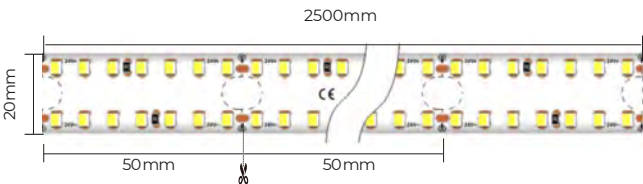

Installation Accessories


Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	

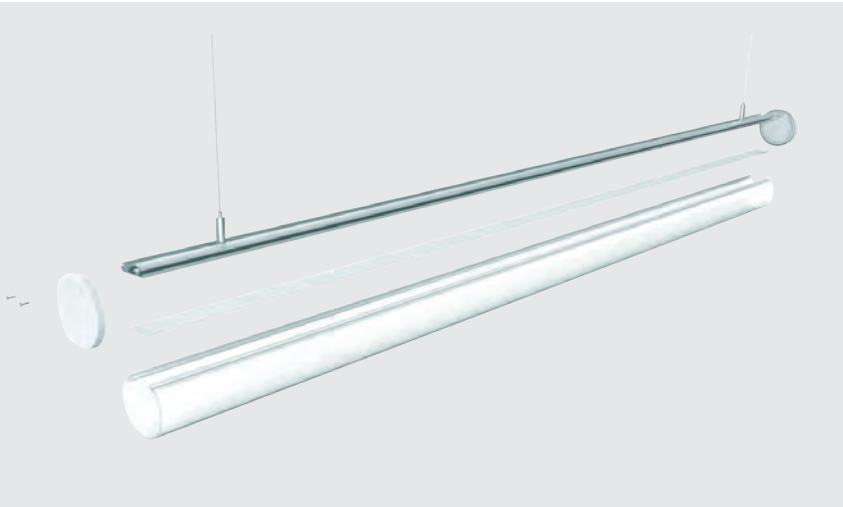

Standard extenders

180° extender	EX-09 13.3x2.65x1000mm	
---------------	---------------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346x30x23.5mm	24VDC	65W	
BDD-V24-065S	346x30x23.5mm	24VDC	65W	
BN-V24-060P	305x30x17mm	24VDC	60W	
BSD-V24-065S	346x30x23.5mm	48VDC	65W	
BSD-V24-100S	346x30x23.5mm	48VDC	100W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type
LLS	-	Pendant tube	LT 60	Curve	C	Diffuser D	No carrier X Silver S White W Black B	Holeless end cap S	2500mm	-	24VDC Flexible strip F	20W/m 20	1900K CW 2300K LW 2700K SW 3000K WW 3500K PW 4000K NW 5000K DW 6000K W	>80 8 >90 9	3-in-1 Dimming DALI Dimming Non dimming	D A N	SEL Whole SEL Individual	B D Customized S
LLS	-		LT 60	C	D	X	S	S	2500	-	F	20	LW	8		D -	D	C
LLS	-		LT 60	C	D	X	S	S	2500	-						-	B	C

Ordering profile components SEL-LLS-LT60CDXSS2500-BC



Ordering luminaires kits SEL-LLS-LT60CDXSS2500-F20LW8D-DC



SEL-LT90



- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space
- Built-in linear power supply, invisible and beautiful
- Two installation ways: pendant and surface mounted

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 30W/m
Transmittance	>85%



Profile Components

Profile X1	PR-LT90 2500mm	
Diffuser 1	CV-LT90 90x2500mm	
End cap 2	EC-LT90 93x8.5mm	

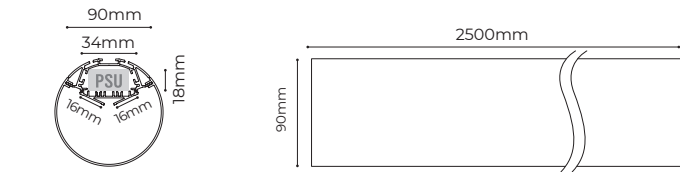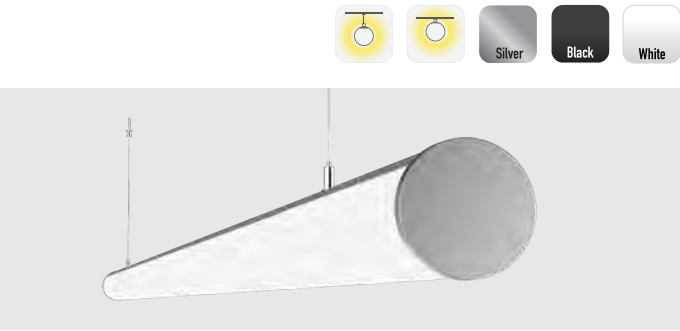


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DE160-24V-15mm	λ 80 λ 95	>510LM/m >1280LM/m	24V	9.5W/m	2500x15x1.5mm	160 LEDs	8 LEDs/50mm

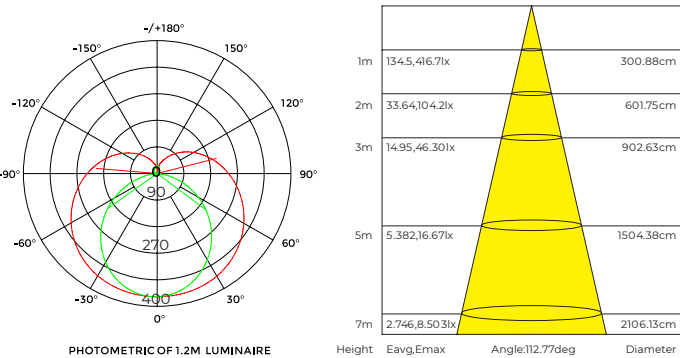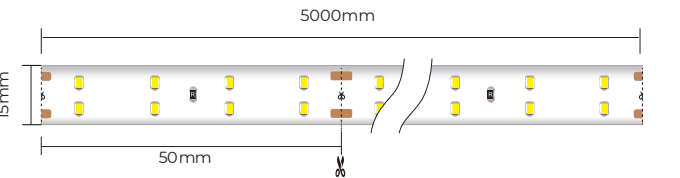

Installation Accessories

Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Surface mounted clip	CP-18 20x28.2x10.5mm	

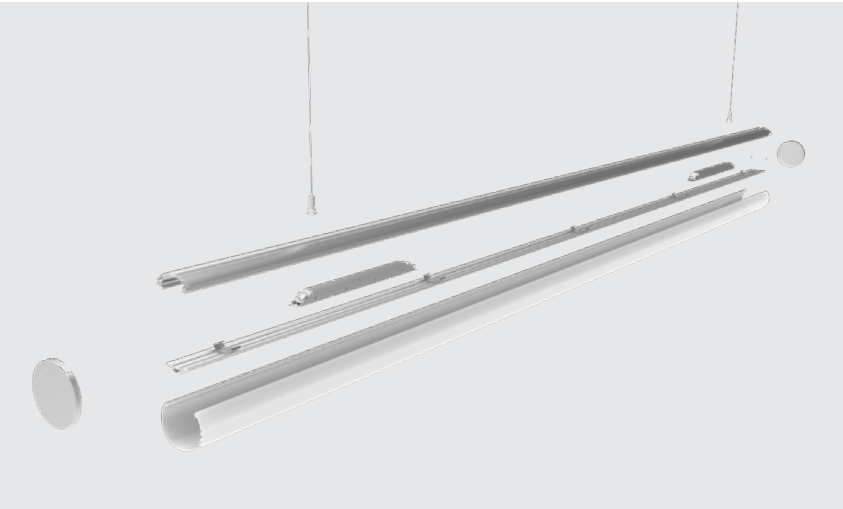

Standard extenders

180° extender	EX-E1 55Å 10Å 2mm	
---------------	----------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	37Å 21Å 19.5mm	24VDC	30W	
BDD-V24-030S	37Å 21Å 19.5mm	24VDC	30W	
BN-V24-060P	305Å 30Å 17mm	24VDC	60W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires


Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Pendant tube	LT	90	Curve	C	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Flexible strip	F	19W/m	19	1900K	CW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C
											White	B									2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
											Black	W									2700K	SW			Non dimming	N				
																					3000K	WW								
																					3500K	PW								
																					4000K	NW								
																					5000K	DW								
																					6000K	W								
LLS	-		LT	90		C		D		X	S		S	2500	-		F	19		LW		B			D	-		D		C
LLS	-		LT	90		C		D		X	S		S	2500	-													B		C

Ordering profile components SEL-LLS-LT90CDXS2500-BC Ordering luminaires kits SEL-LLS-LT90CDXS2500-F19LW8D-DC


SEL-LT120

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

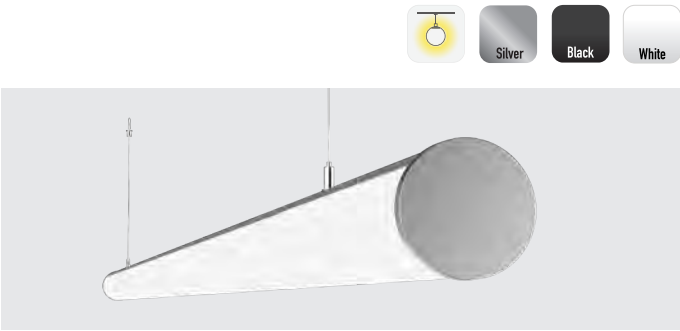

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 45W/m
Transmittance	>85%


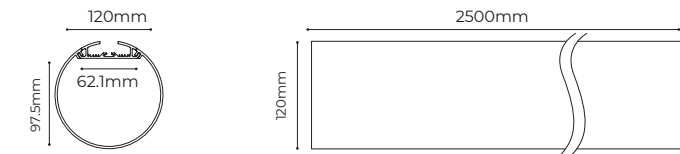


Profile Components

Profile X1	PR-LT120 2500mm	
Diffuser 1	CV-LT120 120x2500mm	
End cap 2	EC-LT120 123.2x10mm	


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	2500Å 59Å 1.5mm	420 LEDs	21 LEDs/50mm
D58480-48V-59mm	λ 80 λ 90	4600 LM/m	48V	30W/m	2500Å 59Å 1.5mm	480 LEDs	16 LEDs/33.3mm

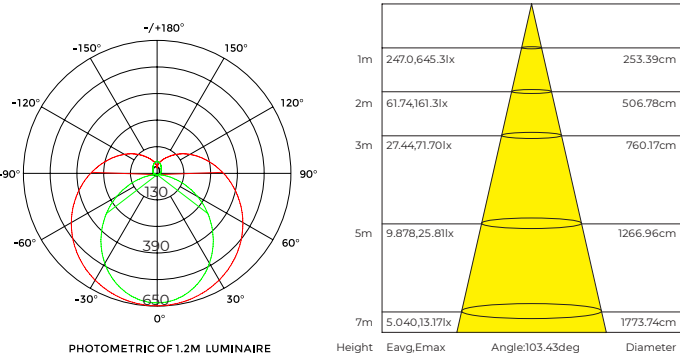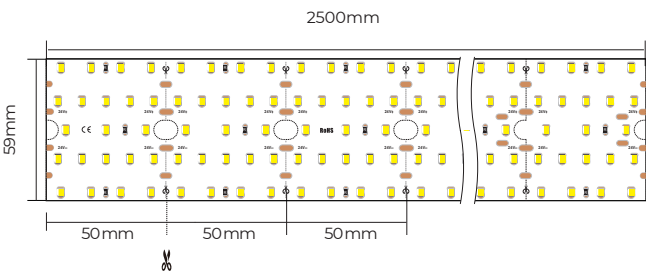

Installation Accessories

Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	

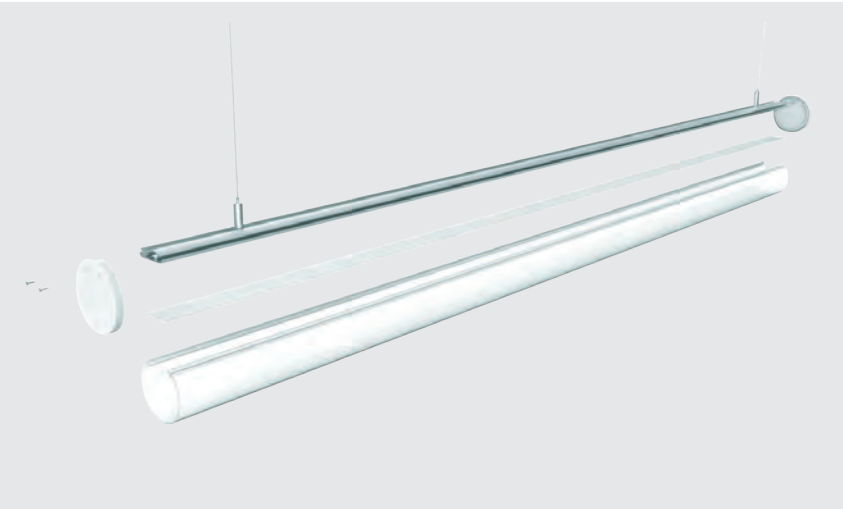

Standard extenders

180° extender	EX-09 13.3x2.65x1000mm	
---------------	---------------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373x39x27mm	48VDC	150W	
BSD-V48-200S	373x39x27mm	48VDC	200W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Pendant tube	LT	120	Curve	C	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Flexible strip	F	36W/m	36	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C
											White	W									2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
											Black	B									2700K	SW			Non dimming	N				
											3000K	WW																		
											3500K	PW																		
											4000K	NW																		
											5000K	DW																		
											6000K	W																		
LLS	-		LT	120		C		D	X	S		S	2500	-		F		36		LW	8		D	-		D		C		
LLS	-		LT	120		C		D	X	S		S	2500	-										-		B		C		

Ordering profile components SEL-LLS-LT120CDXSS2500-BC



Ordering luminaires kits

SEL-LLS-LT120CDXSS2500-F36LW8D-DC











LLS-C series

S E L Curve Lighting System, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The straight and curve basic modules are utilized to produce various circular luminaires, interconnect curves freely and intersperse combined structure randomly. limitless possibilities produce limitless imagination. The flowing light shuttles back and forth along the edge of ceilings, wall and floors, creating thousands of styles and opening new illumination horizons.

Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
AS3535 Series							
SEL-AS3535-03A90		35X35,D320 90°			Downward	DY8140-24V-20mm-03A90	
SEL-AS3535-03N90		35X35,D320 90°			Inward	D8140-24V-20MM	
SEL-AS3535-03W90		35X35,D320 90°			Outward	D8140-24V-20mm	
SEL-AS3535-04T90L		35X35X400			twist 90°left	DT8140-24V-20MM	
SEL-AS3535-04T90R		35X35X400			twist 90°right	DT8140-24V-20MM	
SEL-AS3535-05T180		35X35X500			twist 180°	DT8140-24V-20MM	
SEL-AS3535-08A45/90		35x35, D800 45°/ 90°			Downward	DY8140-24V-20mm-08A45	
SEL-AS3535-15A45/90		35x35, D1500 45°/ 90°			Downward	DY8140-24V-20mm-15A45	
SEL-AS3535-30A45		35x35, D3000 45°			Downward	DY8140-24V-20mm-30A23	
SEL-AS3535-2500		35x35x2500			Downward	DY8140-24V-20mm DT8140-24V-20MM	
SEL-AS3535-15N90		35x35, D1500 90°			Inward	D8140-24V-20mm	
SEL-AS3535-15W90		35x35, D1500 90°			Outward	D8140-24V-20mm	


Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
AH5060 Series							
SEL-AH5060-10A45/90		50x60, D1000 45°/ 90°			Upward&Downward	DY8140 -24V-20mm-10A45	
SEL-AH5060-15A45/90		50x60, D1500 45°/ 90°			Upward&Downward	DY8140 -24V-20mm-15A45	
SEL-AH5060-30A45		50x60, D3000 45°			Upward&Downward	DY8140 -24V-20mm-30A23	
SEL-AH5060-2500		50x60x2500			Upward&Downward	DY8140 -24V-20mm D8140 -24V-20MM	
SEL-AH5060-15N90		50x60, D1500 90°			Inward&Outward	D8140 -24V-20mm	
SEL-AH5060-15W90		50x60, D1500 90°			Inward&Outward	D8140 -24V-20mm	


Light Source for LLS-C

Model	Drawing	LEDs	LEDs/cut	Entry Cable	DC(V)	Max.	Typ.		LM(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Flexible light source														
SEL-D8140-24V-20mm		140/m	14/98mm		24	21.1W/m	19.2W/m		2120LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	4712x20x1.5mm	4.7M/Roll	AS3535-15N90 AS3535-15W90 AH5060-15W90 AH5060-15N90
SEL-DT8140-24V-20mm		140/m	14/100mm		24	21.1W/m	19.2W/m		2490LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x20x1.5mm	5M/Roll	AS3535-03N90 AS3535-03W90 AS3535-2500 AS3535-04T90L AS3535-04T90R AS3535-05T180 AH5060-2500
Rigid modular														
SEL-DY8140-24V-20mm		70/pcs	14/100mm		24	10.6W/pcs	9.6W/pcs		1060LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	499x20x5.8mm	20pcs/Set	AS3535-2500 AH5060-2500
SEL-DY8140-24V-20mm-08A45		42/pcs	14		24	6.4W/pcs	5.8W/pcs		650LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8pcs/Set	AS3535-08A45 AS3535-08A90
SEL-DY8140-24V-20mm-10A45		56/pcs	14		24	8.3W/pcs	7.5W/pcs		820LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AH5060-10A45 AH5060-10A90
SEL-DY8140-24V-20mm-15A45		84/pcs	14		24	12.8W/pcs	11.6W/pcs		1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AS3535-15A45 AS3535-15A90 AH5060-15A45 AH5060-15A90
SEL-DY8140-24V-20mm-30A23		84/pcs	14		24	12.8W/pcs	11.6W/pcs		1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AS3535-30A45 AH5060-30A45
SEL-DY8140-24V-20MM-03A90		42/pcs	14		24	6W/pcs	5.4W/pcs		700LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8PCS/SET	AS3535-03A90


Highlight

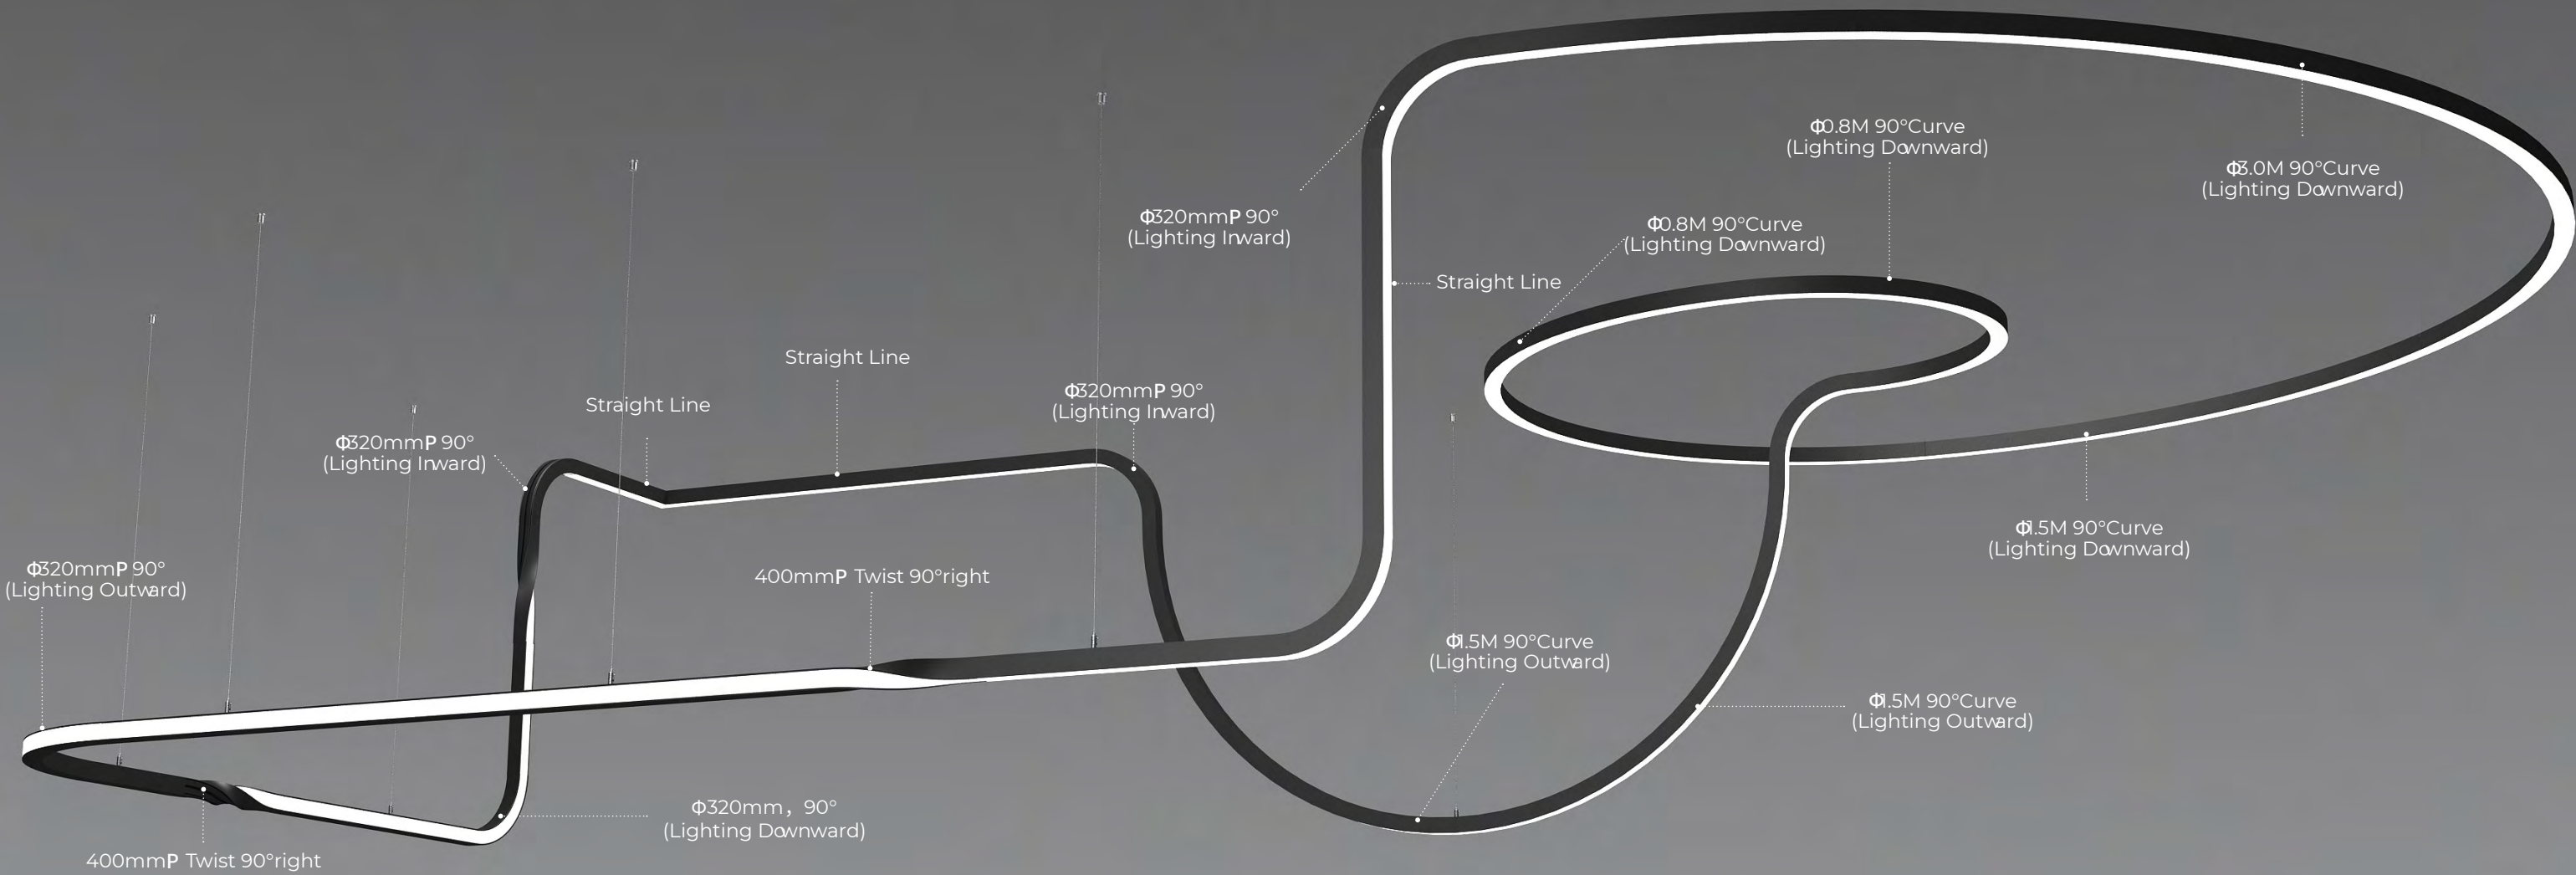

Modularized design:
8 modules can be combined and interconnected freely according to the spatial design.

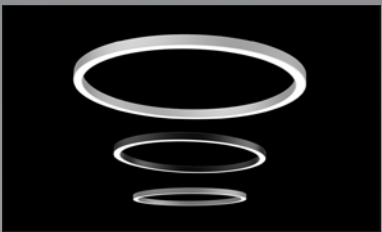

Circular Application:
Can be interconnected into circular luminaires with different diameters.

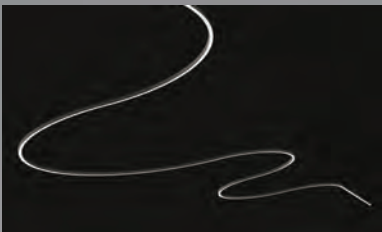


Curve Application:
Can be interconnected into curves with different radii.



Lighting upward&downward:
AH5060 series available for lighting upward&downward.




Flexible diffuser:
20m/roll flexible diffuser, ultra-long application in 3D space without connection and light leakage, 8 modules can share the same difuser.

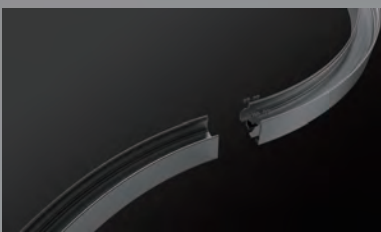

Interconnection without light leakage:
Brand new connectors, convenient using and no light leakage.


Curve Lighting Solution

SEL-AS3535 Series

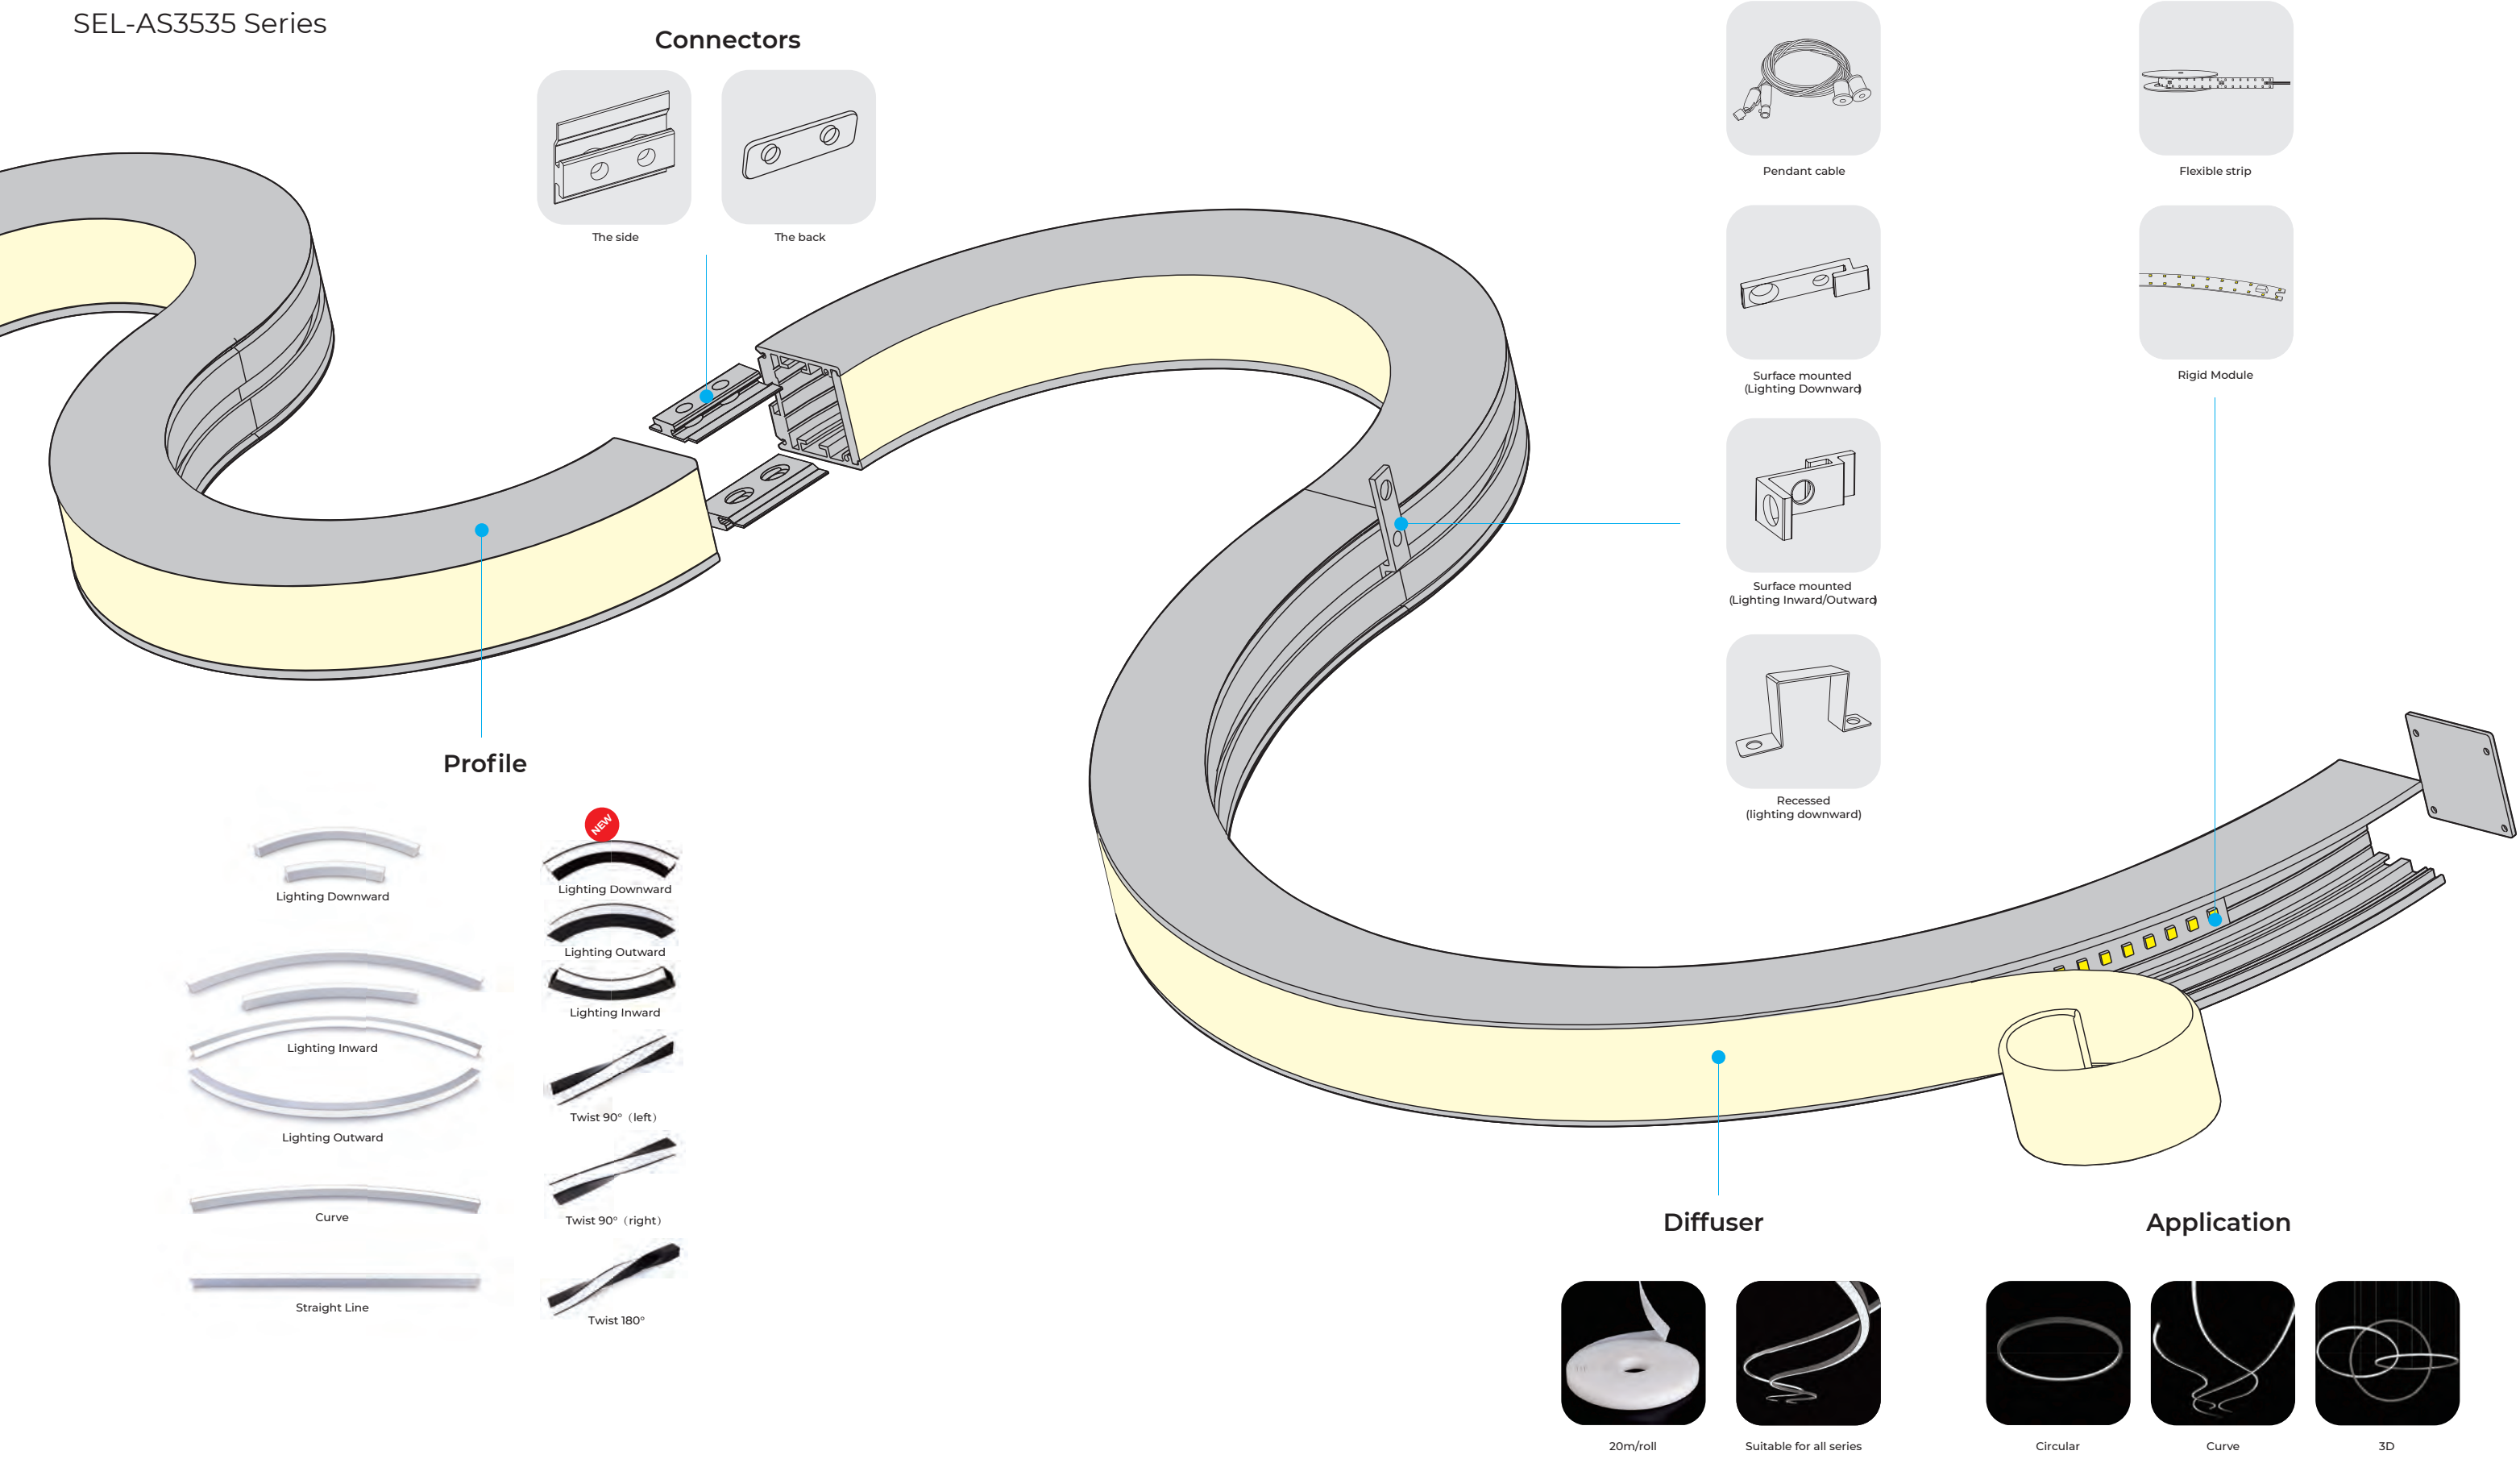

Curve Lighting Solution

SEL-AH5060 Series

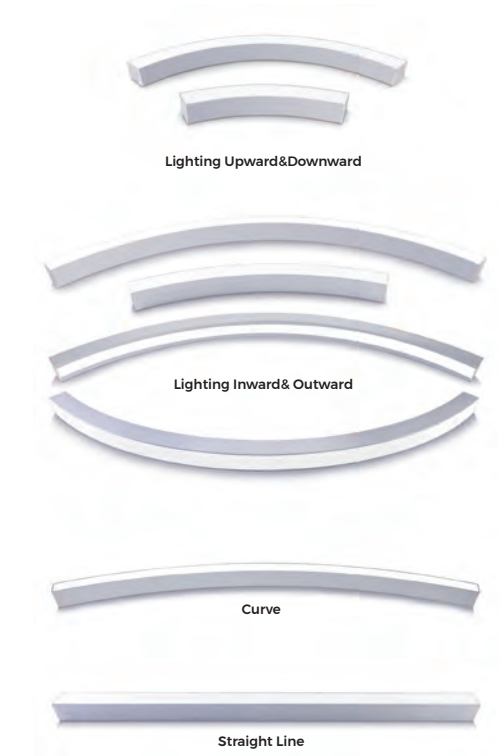


Profile

Installation accessories




Pendant wire



Clip

Connectors



Diffuser



20m/roll
Inward:47×4MM



20m/roll
Outward:32×3.5MM



Suitable for all series

Application



Circular



Curve




3D

Light source




Flexible strip



Rigid Module

Basic Modules

SEL-AS3535 Series

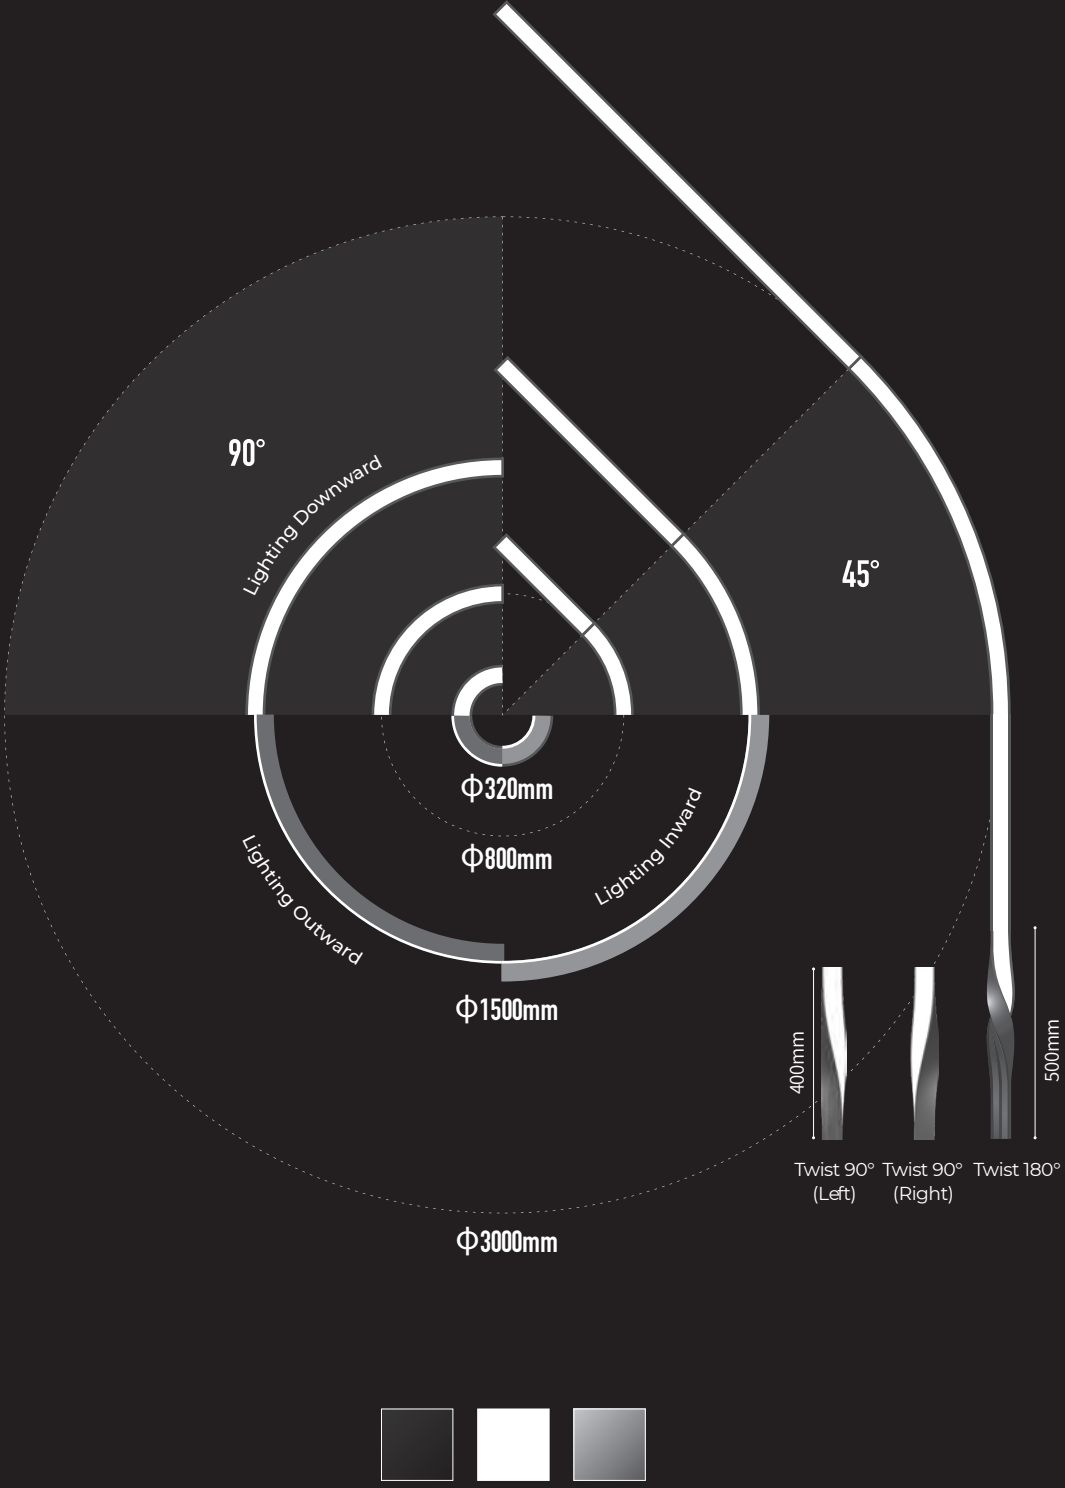

Φ800mm, Curve 90° (Lighting Downward),
45° Rigid Modular

Φ800mm, Curve 45° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 90° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 45° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 90° (Lighting Inward),
Flexible Strip

Φ1500mm, Curve 90° (Lighting Outward),
Flexible Strip

Φ3000mm, Curve 45° (Lighting Downward),
22.5° Rigid Modular

Straight Line (2500mm),
Rigid Module (499mm)

Φ320mm, Curve 90° (Lighting Downward),
90° Rigid Modular

Φ320mm, Curve 90° (Lighting Outward),
Flexible Strip

Φ320mm, Curve 90° (Lighting Inward),
Flexible Strip



400mm, Twist 90°N left), Flexible Strip

400mm, Twist 90°N right), Flexible Strip

500mm, Twist 180°, Flexible Strip




Basic Modules

SEL-AH5060 Series

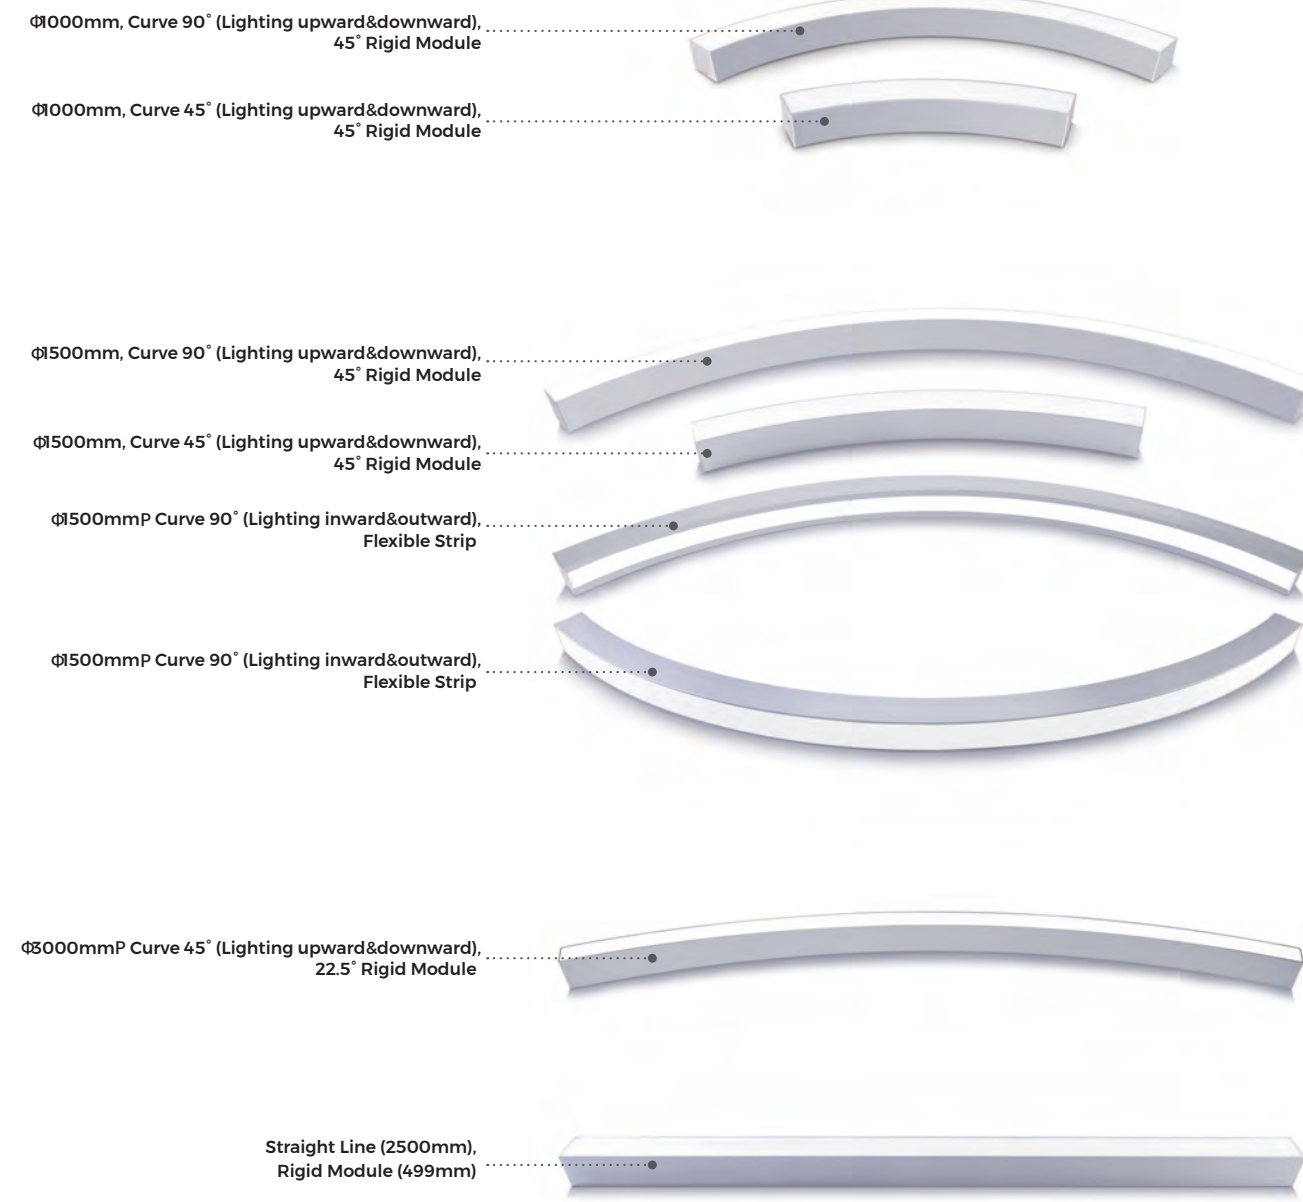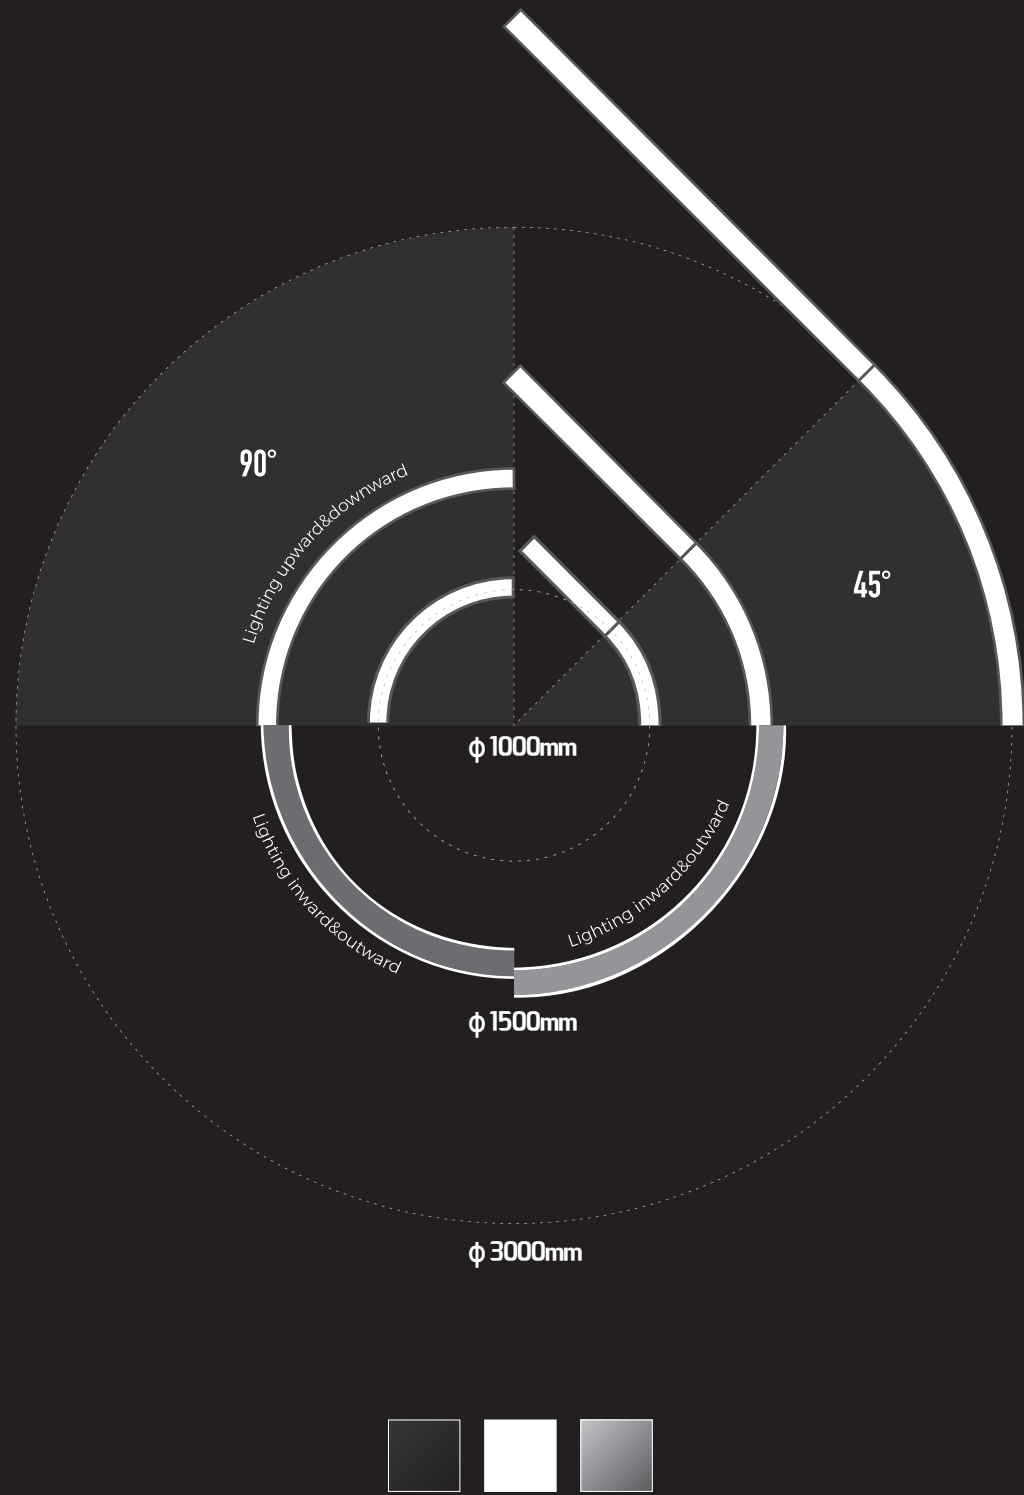

Lighting Source Solution


- 1 Rigid modularP available for lighting downward curve modules/ straight modules
- 2 Flexible strip, available for lighting inward curve modules/ lighting outward curve modules/twist modules/straight modules

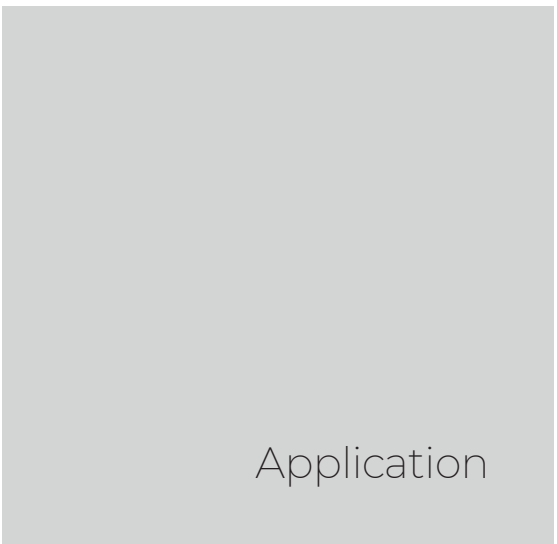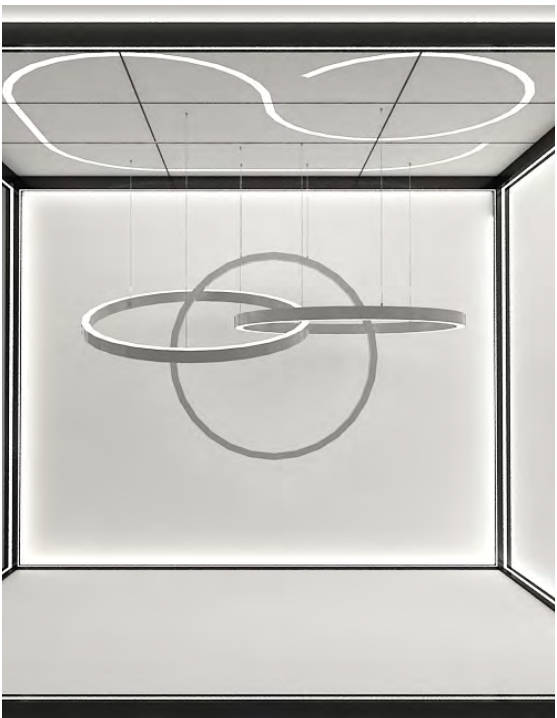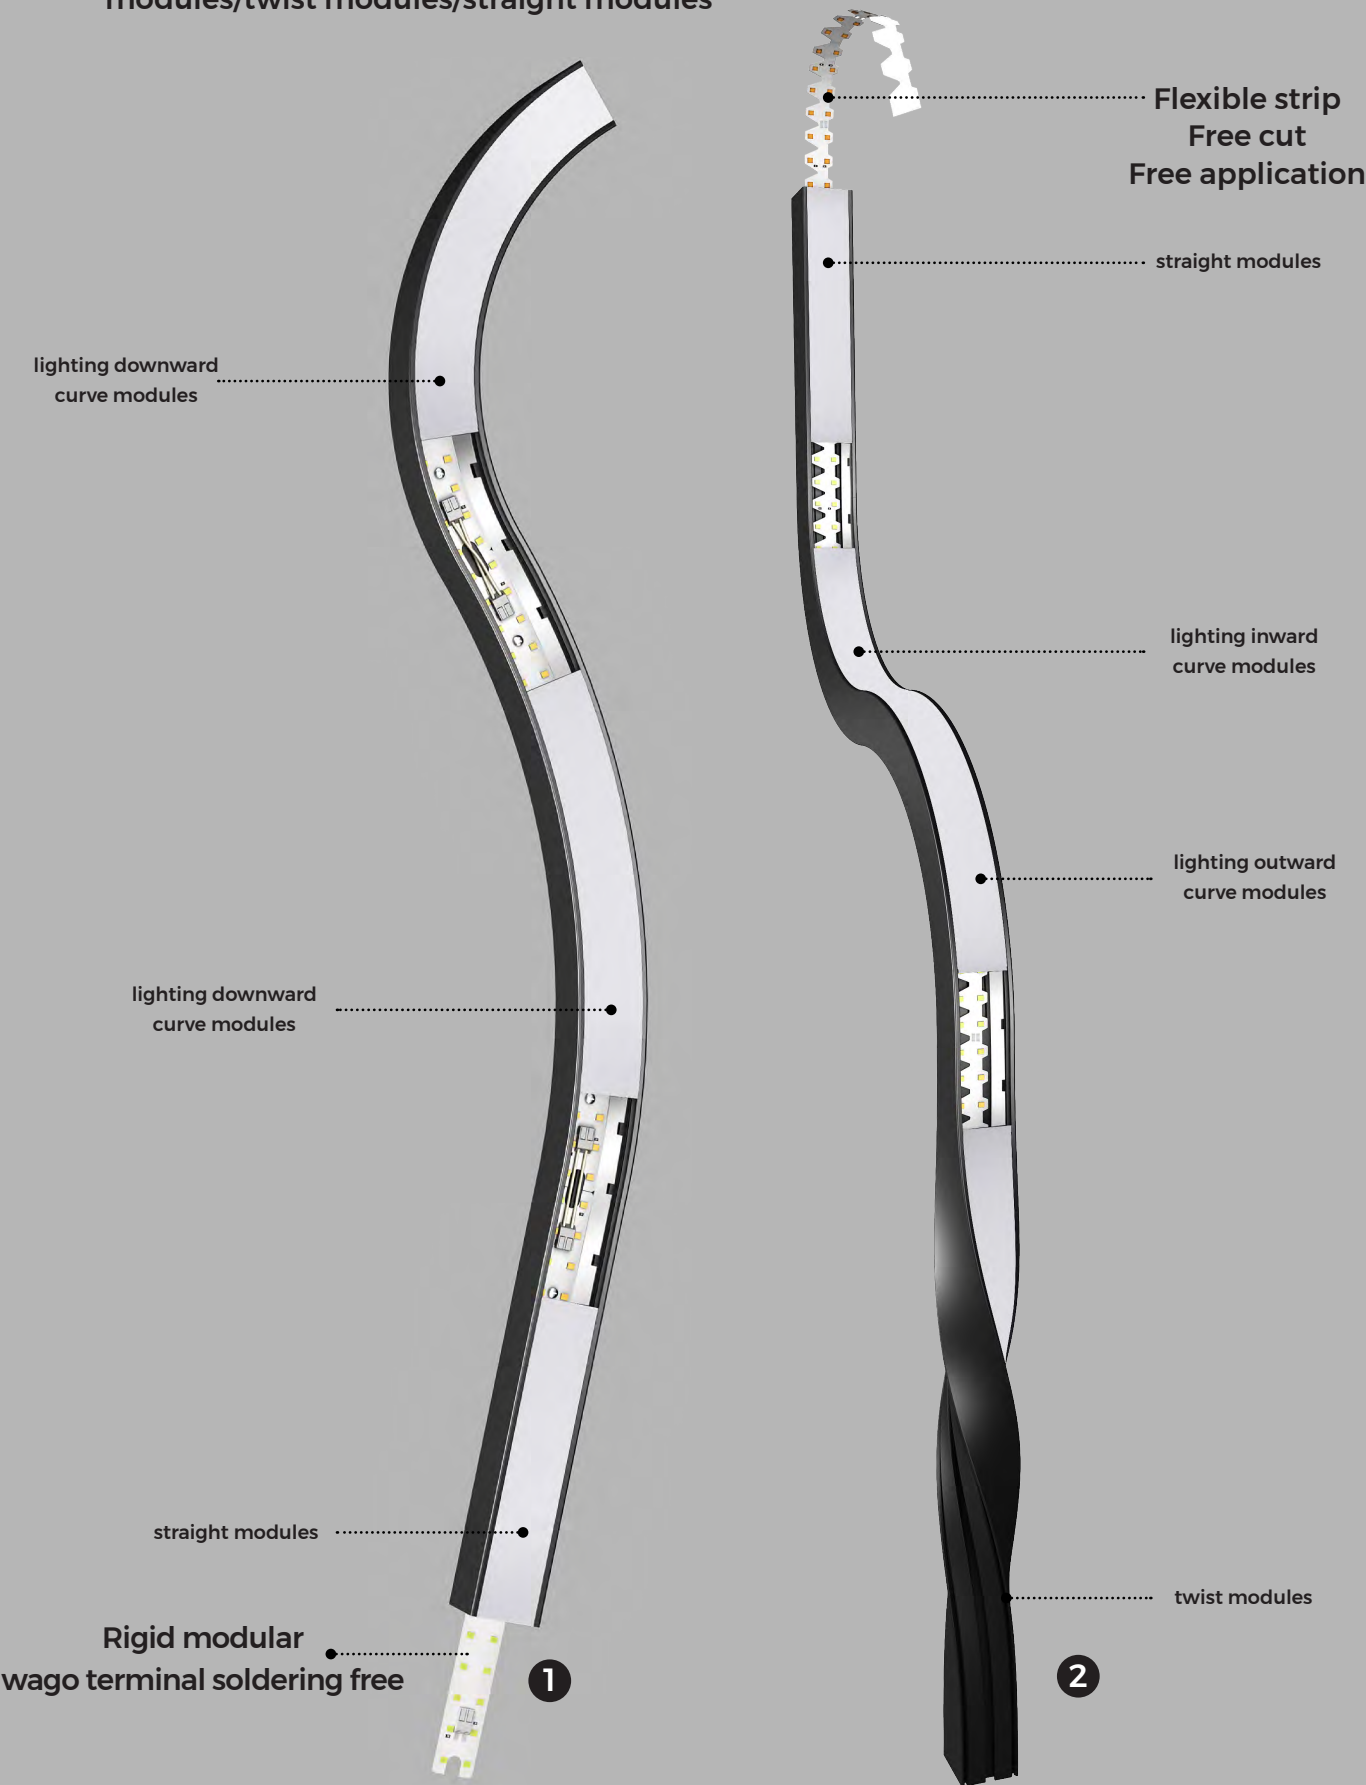

Application


SEL-AS3535-03A90

- $\phi 0.32M$ 90° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

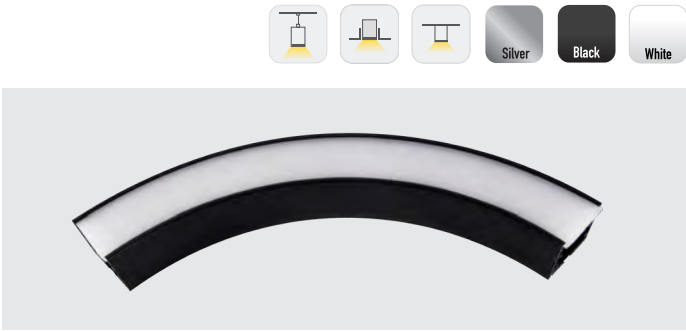

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

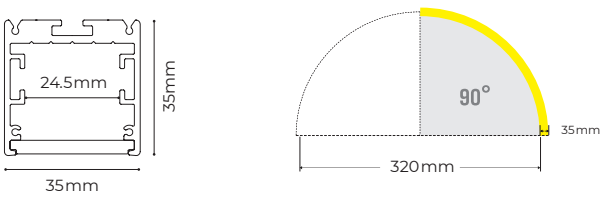

Profile components


Profile	PR-AS3535-03A90 35Å 35mm,D320mm,90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PE-KXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	
	TL-03 78Å 34Å 15mm	

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-03A90	>80	700LM/M	24V	5.4W/m	D320x90°x20 x5.8mm	42LEDs	14LEDs

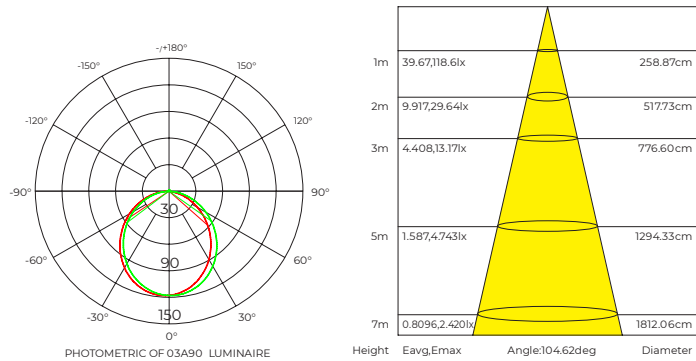

Ordering Code

Category		-	Series		Section Size	Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	320mm lighting down 90°
						White	W	
						Black	B	
	PR	-		AS	3535		B	03A90

Ordering profile components


SEL-AS3535-03N90

- $\phi 0.32M$ 90° arc (lighting inward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

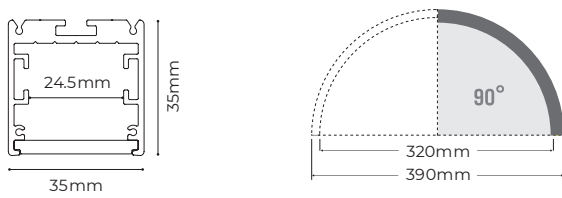

Profile components


Profile	PR-AS3535-03N90 35x35mmxP D320mmP90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V- 20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs

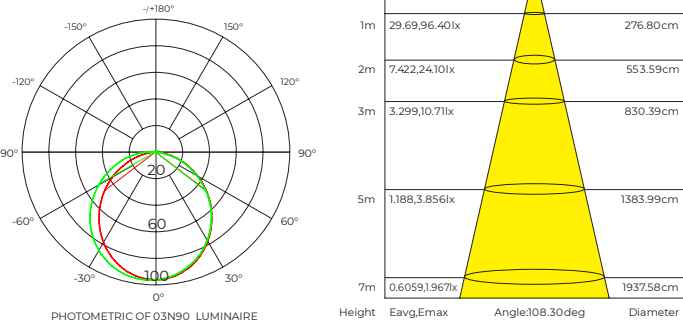


Ordering Code

Category		-	Series		Section Size	Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting inward 90°
						White	W	
						Black	B	
	PR	-		AS	3535		B	15N90


Ordering profile components

SEL-AS3535-03W90

- ϕ0.32M 90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted

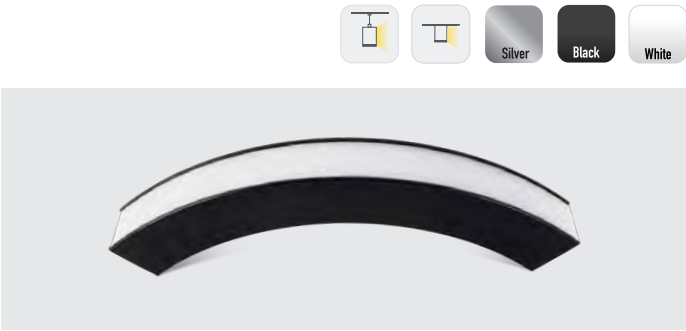


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

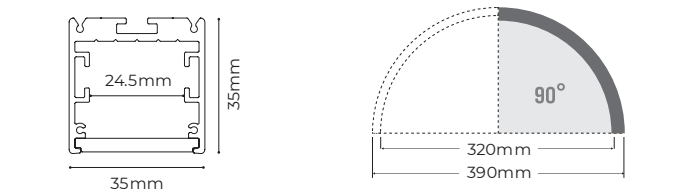

Profile components	
Profile	PR-AS3535-03W90 
Diffuser	CV-AS3535-20000 
End cap	EC-AS3535 

Lighting Source							
Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DTB140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 
Pendant cable (wire and line in one)	PN-CXX 
Surface buckle	CL-04 
Screw set	CL-01 

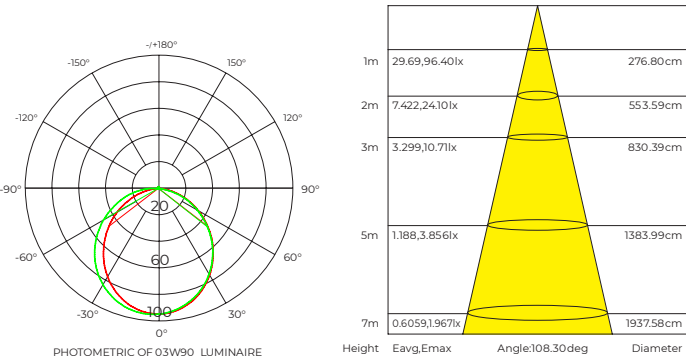


Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	320mm lighting outward 90°
						White	W	
						Black	B	
	PR	-		AS	3535		B	03W90


 Ordering profile components

SEL-AS3535-04T90L


- 0.4M twist 90° left, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

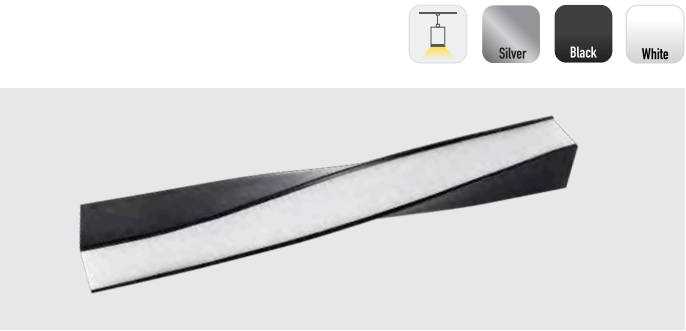


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

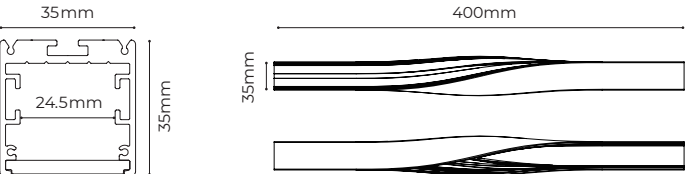

Profile components	
Profile	PR-AS3535 
Diffuser	CV-AS3535-20000 
End cap	EC-AS3535 

Lighting Source							
Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DTB140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 
Pendant cable (wire and line in one)	PN-CXX 

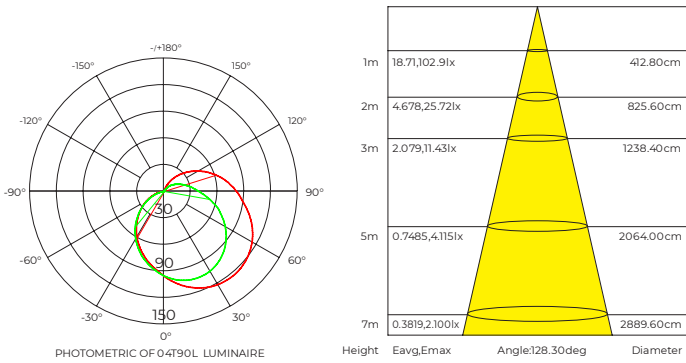


Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	400MM twist 90°left
						White	W	
						Black	B	
	PR	-		AS	3535		B	04T90L

 Ordering profile components


SEL-AS3535-04T90R

- 0.4M twist 90° right, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

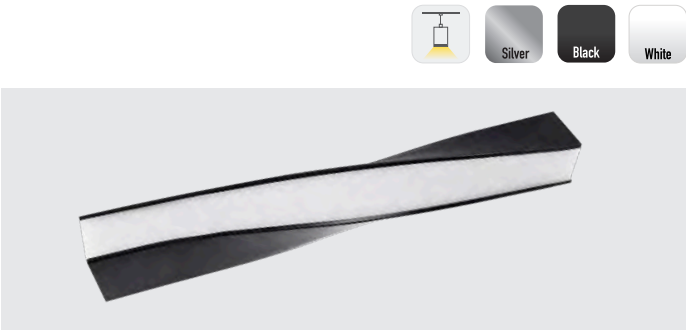

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

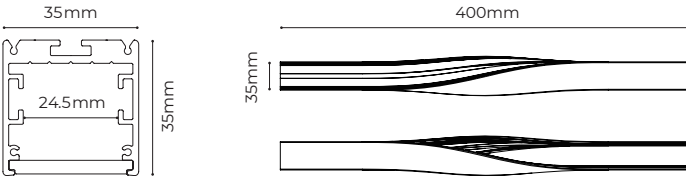

Profile components


Profile	PR-AS3535 35Å 35Å 400mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

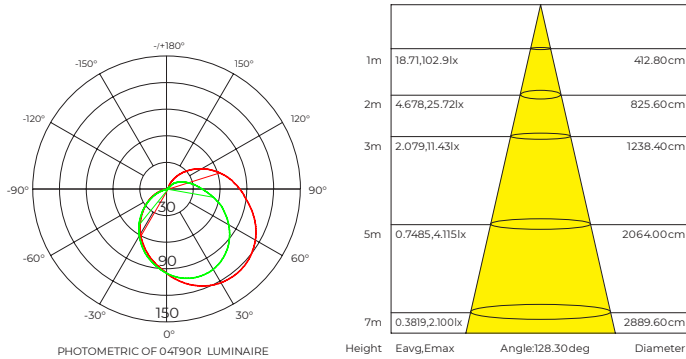


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	400MM twist 90°right
		White				W		
		Black				B		
	PR	-		AS	3535		B	04T90R

Ordering profile components


SEL-AS3535-05T180

- 0.5M twist 180°, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

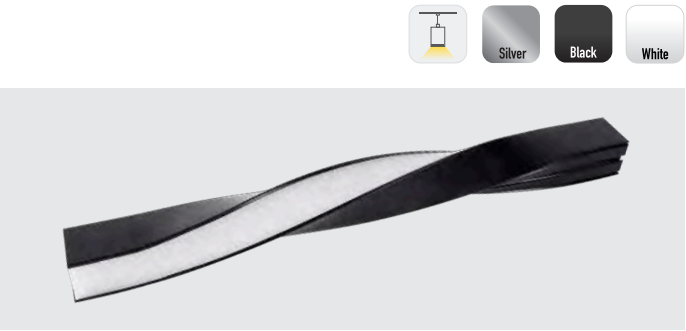

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

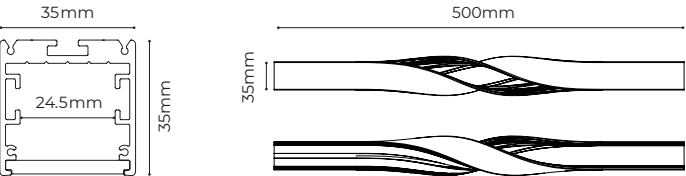

Profile components


Profile	PR-AS3535 35Å 35Å 500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

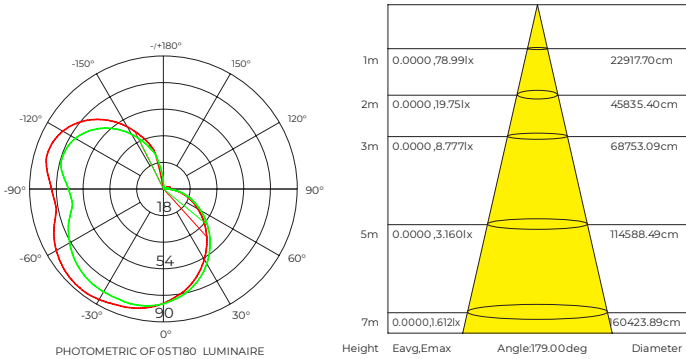


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	500MM twist 180°
		White				W		
		Black				B		
	PR	-		AS	3535		B	05T180

Ordering profile components


SEL-AS3535-08A45/90

- ϕ 0.8m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

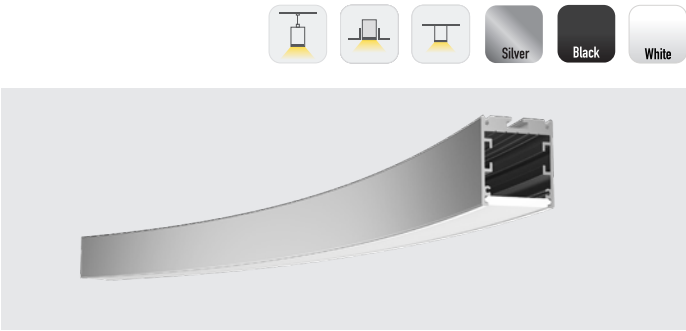

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

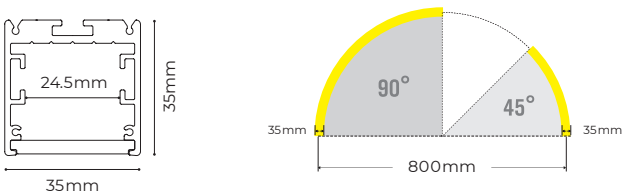

Profile components

Profile	PR-AS3535-08A45/90 35Å 35mm,D800mm,45/90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBCA 250x20x0.6mm	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 30Å 23.5Å 4.6mm	
-----------	--------------------------	--

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-08A45	>80	650LM/pcs	24V	5.8W/pcs	D800x45&20x 5.8mm	42LEDs	14LEDs

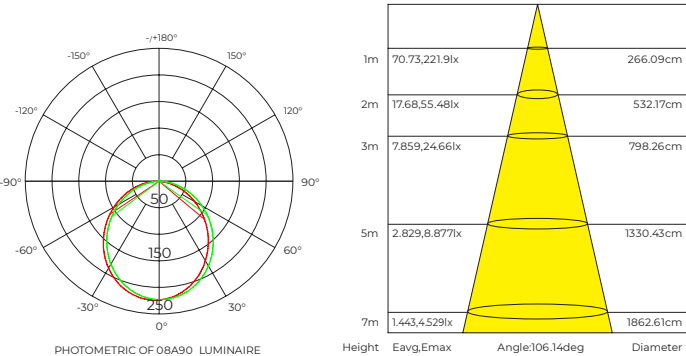


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	800mm lighting downward 45° 800mm lighting downward 90°
						White	W	
						Black	B	
	PR	-		AS	3535		B	08A45

Ordering profile components SEL-PR-AS3535B08A45


SEL-AS3535-15A45/90

- ϕ 1.5m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

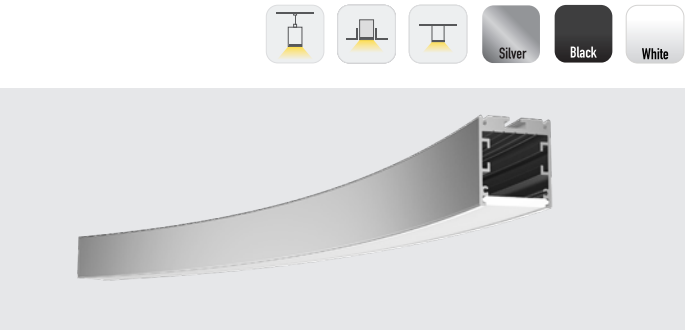

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

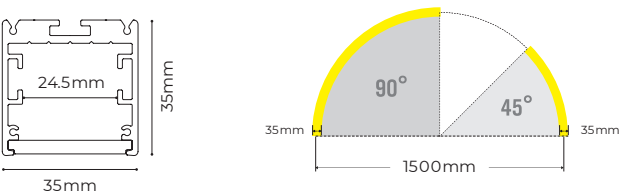

Profile components

Profile	PR-AS3535-15A45/90 35Å 35mm,D1500mm,45/90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 130Å 23.5Å 4.6mm	
-----------	---------------------------	--

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-15A45	>80	1300LM/ pcs	24V	11.6W/pcs	D1500x45&20 x5.8mm	84LEDs	14LEDs

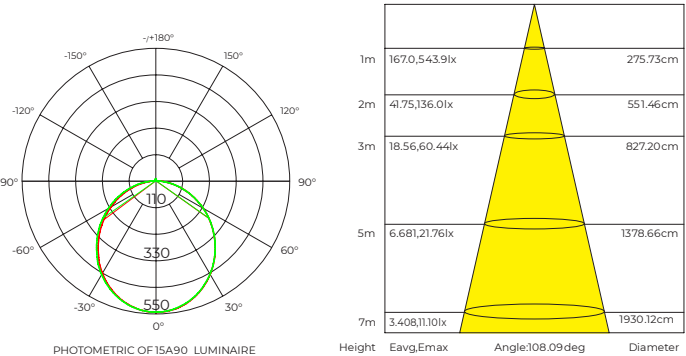


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	1500mm lighting downward 45° 1500mm lighting downward 90°
						White	W	
						Black	B	
	PR	-	AS	3535		B	15A45	

Ordering profile components SEL-PR-AS3535B15A45


SEL-AS3535-30A45

- ϕ 3m 45° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

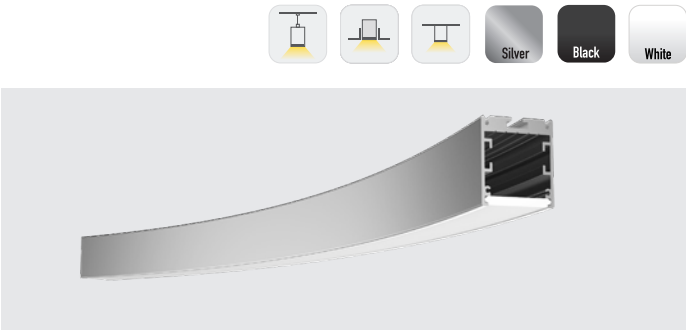

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

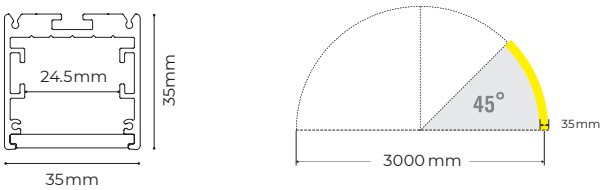

Profile components

Profile	PR-AS3535-30A45 35Å 35mm,D3000mm,45å	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 L30Å 23.5Å 46mm	
-----------	--------------------------	--

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-30A23	>80	1300LM/pcs	24V	11.6W/pcs	D3000x22.5Å 20x5.8mm	84LEDs	14LEDs

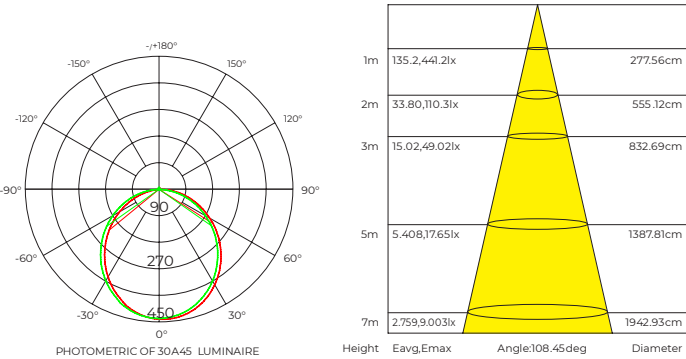


Ordering Code

Category		-	Series		Section Size	Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	3000mm lighting downward 45å
		-				White	W	
		-				Black	B	
		PR	-	AS	3535		B	30A45

Ordering profile components SEL-PR-AS3535B30A45


SEL-AS3535-2500

- 2500m straight line, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

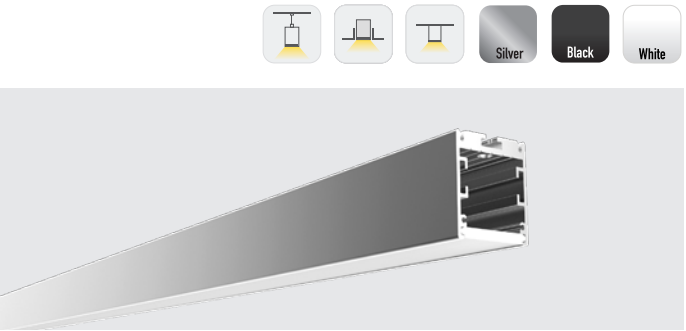

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

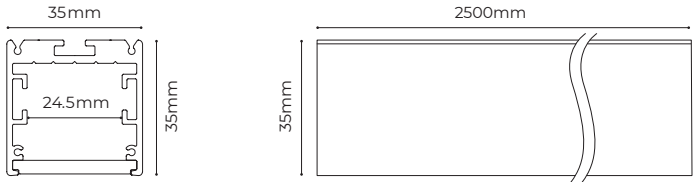

Profile components

Profile	PR-AS3535 35Å 35Å 2500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 30Å 23.5Å 46mm	
-----------	-------------------------	--

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	50.00x20x15mm	140LEDs	100mm/14LEDs
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm	>80	1060LM/pcs	24V	9.6W/pcs	499x20x5.8mm	70LEDs	100mm/14LEDs

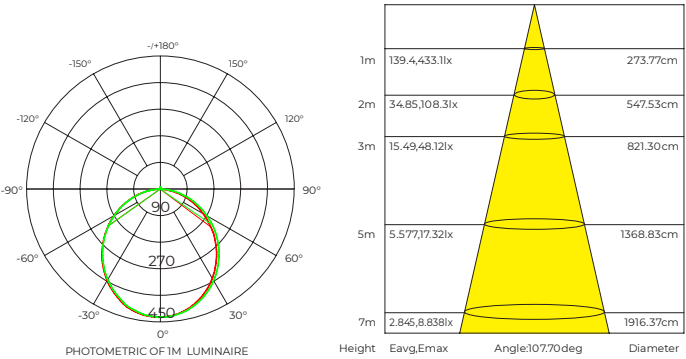

Ordering Code

Category		-	Series		Section Size	Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	2500mm lighting downward
		-				White	W	
		-				Black	B	
		PR	-	AS	3535		B	2500

Ordering profile components SEL-PR-AS3535B2500


SEL-AS3535-15N90

- ϕ1.5m 90° arc (lighting inward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

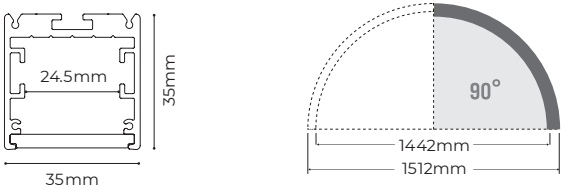

Profile components


Profile	PR-AS3535-15N90 35x35mmPDI500mmP90ã	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DBI40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

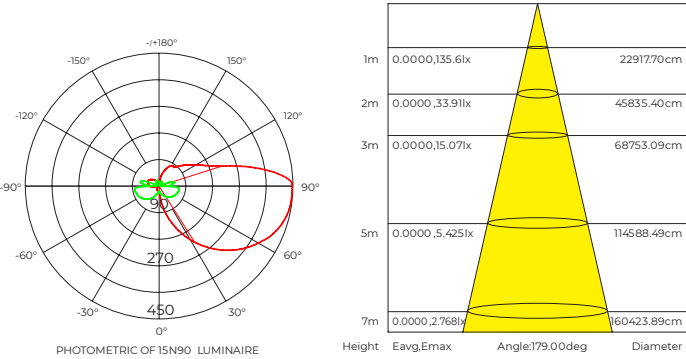

Interconnection Accessories

Connector	EX-26 L30Å 23.5Å 4.6mm	
-----------	---------------------------	--

Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting inward 90°
		White				W		
		Black				B		
	PR	-		AS	3535		B	15N90

Ordering profile components


SEL-AS3535-15W90

- ϕ1.5m 90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

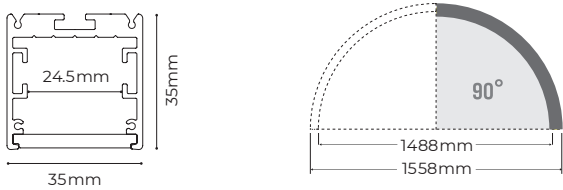

Profile components


Profile	PR-AS3535-15W90 35x35mmPDI500mmP90ã	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DBI40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

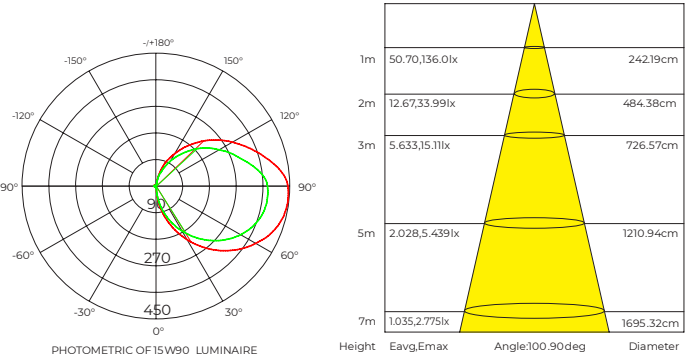

Interconnection Accessories

Connector	EX-26 L30Å 23.5Å 4.6mm	
-----------	---------------------------	--

Ordering Code

Category			-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting outward 90°	
		White				W			
		Black				B			
	PR	-		AS	3535		B	15W90	


Ordering profile components

SEL-AH5060-10A45/90

- ϕ 1m 45°/90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

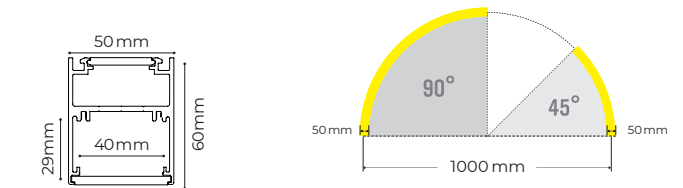

Profile components	
Profile	PR-AH5060-10A45/90 50Å 60,D1000mm,45°/90°
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Lighting Source	
Rigid modular	
Model	CRI Lumens (4000 K) Voltage Typ.power Size LEDs/pcs Cutting unit
DY8140-24V-20mm-10A45	>80 820LM/pcs 24V 75W/pcs D1000x45Åx20x5.8mm 56LEDs 14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBCA 250x20x0.6mm
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

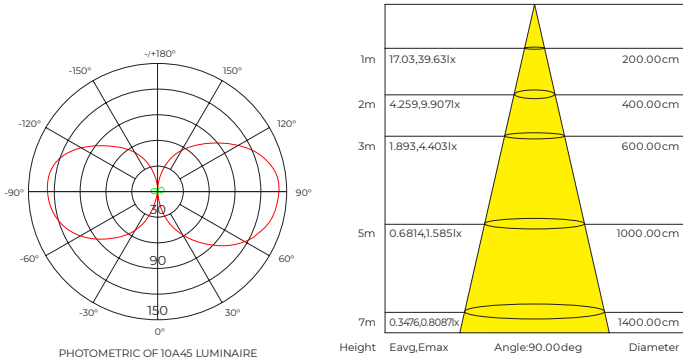

Interconnection Accessories	
Connector	EX-25 39.5X20X12mm

Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1000mm up-down double lighting 45° 90°
						White	W	
						Black	B	
	PR	-		AH	5060		B	10A45


Ordering profile components SEL-PR-AH5060B10A45

SEL-AH5060-15A45/90

- ϕ 1.5m 90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

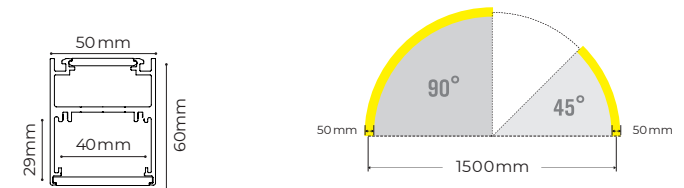

Profile components	
Profile	PR-AH5060-15A45/90 50Å 60,D1500mm,45°/90°
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Lighting Source	
Rigid modular	
Model	CRI Lumens (4000 K) Voltage Typ.power Size LEDs/pcs Cutting unit
DY8140-24V-20mm-15A45	>80 1300LM/pcs 24V 11.6W/pcs D1500x45Åx20x5.8mm 84LEDs 14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBDB 350x20x0.6mm
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

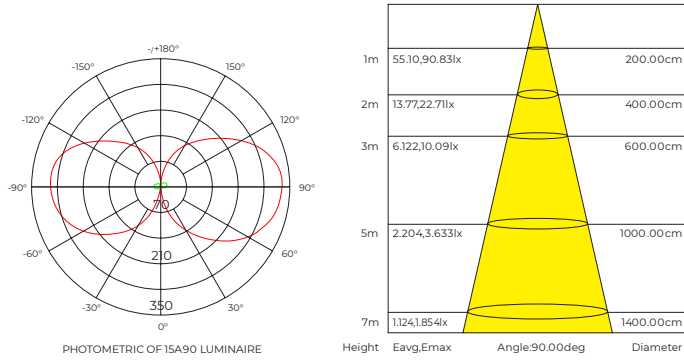

Interconnection Accessories	
Connector	EX-25 39.5X20X12mm

Ordering Code									
Category		-	Series		Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1500mm up-down double lighting 45°	
		White				W	1500mm up-down double lighting 90°		
		Black				B			
	PR	-		AH	5060		B	15A90	

Ordering profile components SEL-PR-AH5060B15A90


SEL-AH5060-30A45

- $\varnothing$ 3m 45° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

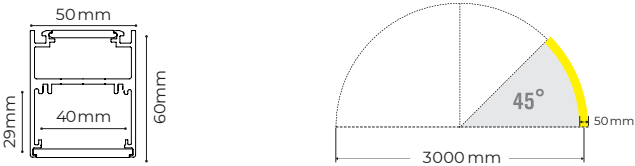

Profile components	
Profile	PR-AH5060-30A45 50Å 60,D3000mm,45Å
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Installation Accessories


Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

Interconnection Accessories

Connector	EX-25 39.5X20X12mm
-----------	-----------------------

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-30A23	>80	1300LM/ pcs	24V	11.6W/pcs	D3000x22.5Å 20x5.8mm	84LEDs	14LEDs

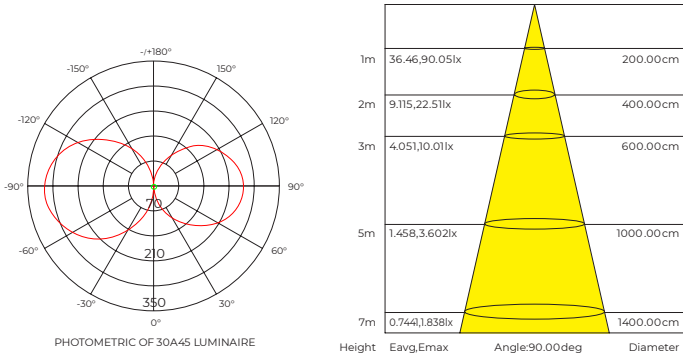

Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	3000mm up-down double lighting 45Å
		-				White	W	
		-				Black	B	
	PR	-		AH	5060		B	30A45

Ordering profile components SEL-PR-AH5060B30A45


SEL-AH5060-2500

- 2500m straight line(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

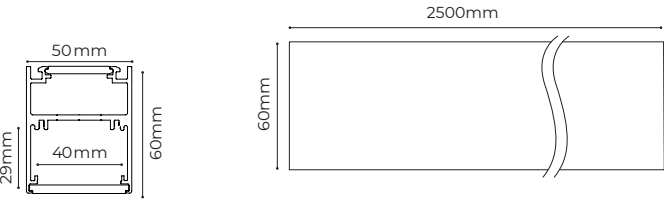

Profile components	
Profile	PR-AH5060 L2500Å W50Å H60mm
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Installation Accessories


Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

Interconnection Accessories

Connector	EX-25 39.5X20X12mm
"L" type connector	EX-28

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm	>80	1060LM/pcs	24V	9.6W/pcs	499x20x5.8mm	70LEDs	100mm/14LEDs

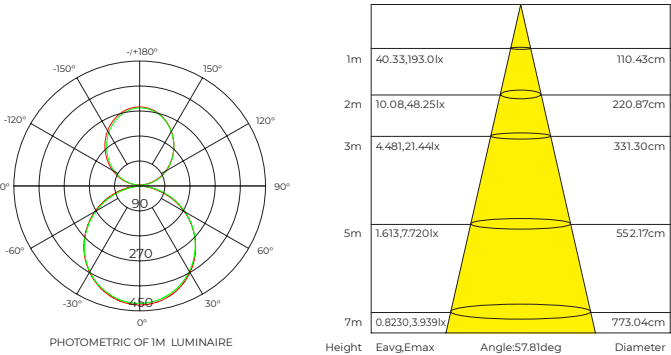


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	2500mm
		-				White	W	
		-				Black	B	
	PR	-		AH	5060		B	2500

Ordering profile components SEL-PR-AH5060B2500



SEL-AH5060-15N90

- ϕ 1.5m 90° arc(inward-outward double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant

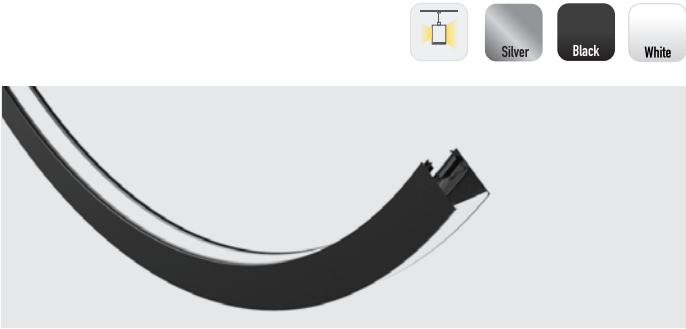

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward



Profile components

Profile	PR-AH5060-15A45 50Å 60,DI500mm,90ã	
50 Diffuser	CV-AH5060-20000 L20000 Å W47Å H4mm	
35 Diffuser	CV-AH5060-20000 L20000 Å W32Å H3.5mm	
End cap	EC-AH5060 L60Å W50Å H2mm	

Lighting Source



Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8I40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Clips	CP-29 39.5Å 20Å 12mm	
Reflective paper	BG-15 16000 Å 26Å .2mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--

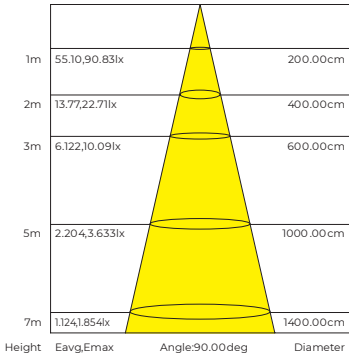

Ordering Code

Category	-	Series	Section Size	Profile Color	Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060
				Silver	S
				White	W
				Black	B
	PR	-	AH	5060	B

Ordering profile components SEL-PR-AH5060B15N90





SEL-AH5060-15W90

- ϕ 1.5m 90° arc(inward-outward double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward



Profile components

Profile	PR-AH5060-15A90 50Å 60,DI500mm,90ã	
50 Diffuser	CV-AH5060-20000 L20000 Å W47Å H4mm	
35 Diffuser	CV-AH5060-20000 L20000 Å W32Å H3.5mm	
End cap	EC-AH5060 L60Å W50Å H2mm	

Lighting Source



Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8I40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Clips	CP-29 39.5Å 20Å 12mm	
Reflective paper	BG-15 16000 Å 26Å .2mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--

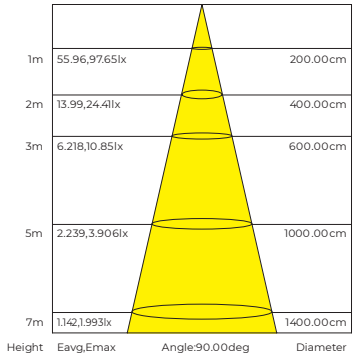

Ordering Code

Category	-	Series	Section Size	Profile Color	Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060
				Silver	S
				White	W
				Black	B
	PR	-	AH	5060	B


Ordering profile components SEL-PR-AH5060B15W90





SKYLINE Series

Linear lighting system SKYLINE series links two points together as an outright line. The line shuttle flexibly and freely in space like horse off the reins to form a myriad of creative styling, bringing up brand-new lighting experience with the charm of purest linear.

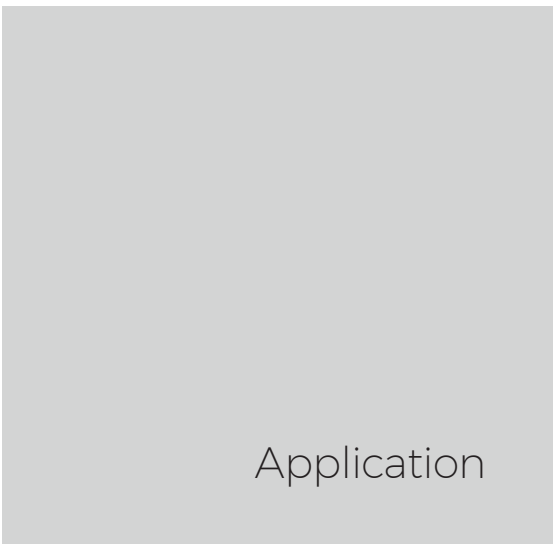

Application


SEL-SKY-06A

- Links two points together as an outright line, achieve free cross-space application.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Featured in a maximum usage length of 6m.
- Got patents for fixed accessories, extremely convenient and flexible for application.



Basic Parameters	
Length	6000mm
Surface processing	White ☐ Black ☒
Lighting method	Indirect lighting

Light Source					
Flexible strip					
2700 K 3000 K 4000 K 6000 K					
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Cutting unit
High-lumen LED Strip	>90	1320LM/m	DC24V	13.5W/m	50mm

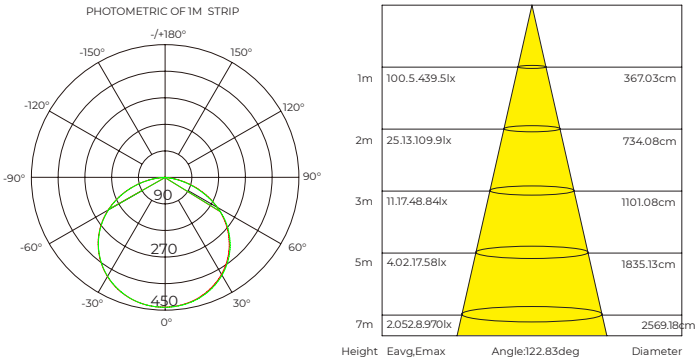

Ordering Code

Series		Length		Light Source Type		CRI		CCT		Profile Color		Label Type		
Skyline	SKY	-	6000mm	06	D8120-24V-8mm	A	>90	9	2700K	27	White	W	Customized	S
									3000K	30	Black	B		
									4000K	40				
									6000K	60				
SKY		-	06		A		9		40		W		-	S
Ordering luminaires kits														
SKY-06A940W-S														

SEL-SKY-06B

- Links two points together as an outright line, achieve free cross-space application.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Featured in a maximum usage length of 6m.
- Got patents for fixed accessories, extremely convenient and flexible for application.




Basic Parameters

Length	6000mm
Surface processing	White ☐ Black ☒
Lighting method	Direct lighting

Light Source

Flexible strip					
2700 K 3000 K 4000 K 6000 K					
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Cutting unit
COF	>90	1000LM/m	DC24V	10W/m	29.4mm

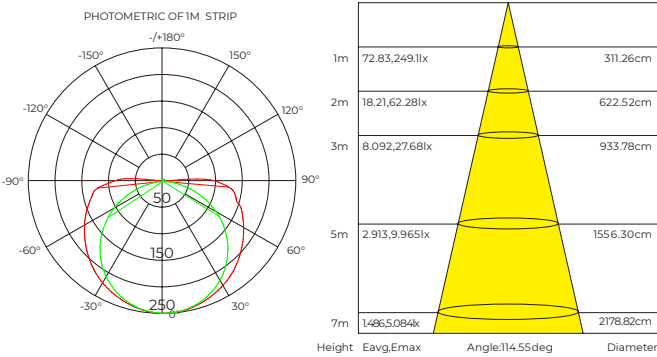

Ordering Code

Series		Length		Light Source Type		CRI		CCT		Profile Color		-	Label Type		
Skyline	SKY	-	6000mm	06	DF10-24V-8mm	B	>90	9	2700K	27	White	W	Customized	S	
									3000K	30	Black	B			
									4000K	40					
									6000K	60					
SKY		-		06		B		9		40		W	-	S	
Ordering luminaires kits														SKY-06B940W-S	

SEL-SKY-06D

- Links two points together as an outright line, achieve free cross-space application.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Featured in a maximum usage length of 6m.
- Got patents for fixed accessories, extremely convenient and flexible for application.




Basic Parameters

Length	6000mm
Surface processing	White ☐ Black ☒
Lighting method	Indirect lighting

Light Source

Flexible strip					
2200 K 2850 K 4000 K 5700 K					
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Cutting unit
High-voltage LED Strip	>80	1100LM/m	AC220~240V 50/60Hz	10.6W/m	250mm

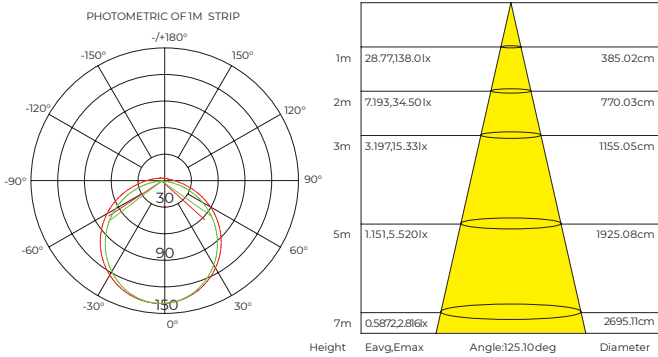

Ordering Code

Series		Length		Light Source Type		CRI		CCT		Profile Color		-	Label Type	
Skyline	SKY	-	6000mm	06	HB104-230V-12mm	D	>90	9	2700K	27	White	W	Customized	S
									3000K	30	Black	B		
									4000K	40				
									6000K	60				
SKY		-		06		D		9		40		W	-	S
Ordering luminaires kits														SKY-06D840W-S

SEL-SKY-12C

- Links two points together as an outright line, achieve free cross-space application.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Featured in a maximum usage length of 12m.
- Got patents for fixed accessories, extremely convenient and flexible for application.




Basic Parameters

Length	12000mm
Surface processing	White ☐ Black ☒
Lighting method	Indirect lighting

Light Source

Flexible strip					
2700K 3000K 4000K 6000K					
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Cutting unit
Ultra-long LED strip	>90	890LM/m	DC24V	8.7W/m	50mm

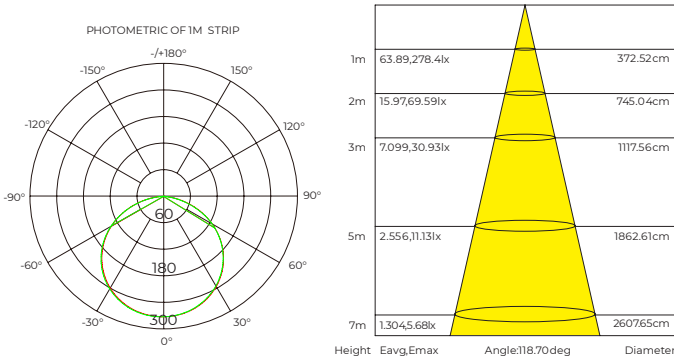

Ordering Code

Series			Length		Light Source Type		CRI		CCT		Profile Color		-	Label Type
Skyline	SKY	-	12000mm	12	DSB120-24V-12mm	C	>90	9	2700K	27	White	W	Customized	S
									3000K	30	Black	B		
									4000K	40				
									6000K	60				
SKY		-		12	C		9		40		W	-		S
Ordering luminaires kits														
SKY-12C940W-S														

SEL-SKY-20C

- Links two points together as an outright line, achieve free cross-space application.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Featured in a maximum usage length of 20m.
- Got patents for fixed accessories, extremely convenient and flexible for application.




Basic Parameters

Length	20000mm
Surface processing	White ☐ Black ☒
Lighting method	Indirect lighting

Light Source

Flexible strip					
2700K 3000K 4000K 6000K					
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Cutting unit
Ultra-long LED strip	>90	890LM/m	DC24V	8.7W/m	50mm

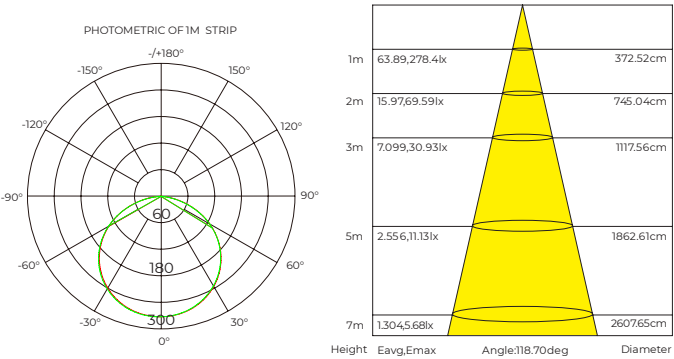

Ordering Code

Series		Length		Light Source Type		CRI		CCT		Profile Color		-	Label Type	
Skyline	SKY	-	20000mm	20	DSB120-24V-12mm	C	>90	9	2700K	27	White	W	Customized	S
									3000K	30	Black	B		
									4000K	40				
									6000K	60				
	SKY	-		20		C		9		40		W	-	S
Ordering luminaires kits														
SKY-20C940W-S														



(619) 340-1203 | contact@90pluslighting.com | www.sel.lighting
90+ Lighting, 1094 Cudahy Place, Suite 212, San Diego CA 92110