



# Specification

Architecture lighting integration series

LR3840(A)




## LR3840(A)

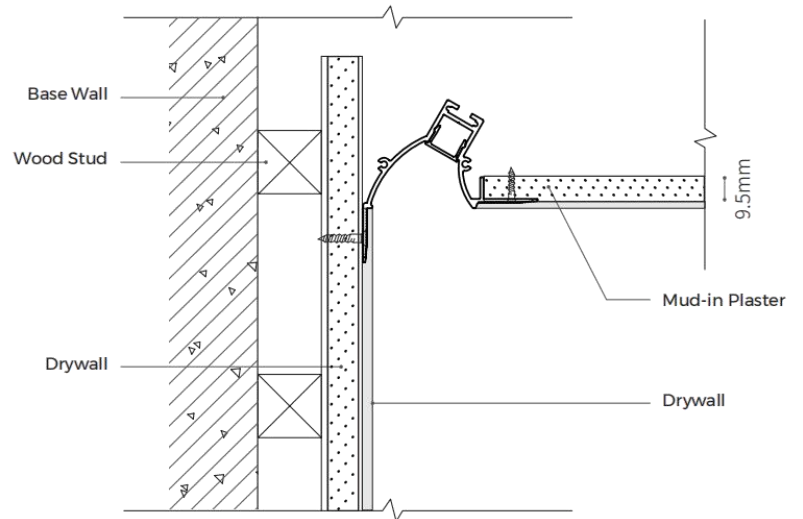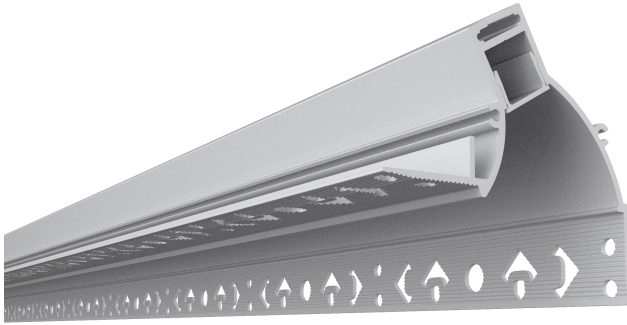

### Features

- Rimless recessed design, integrated into architecture.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting end cap design without screw, make installation more convenient.

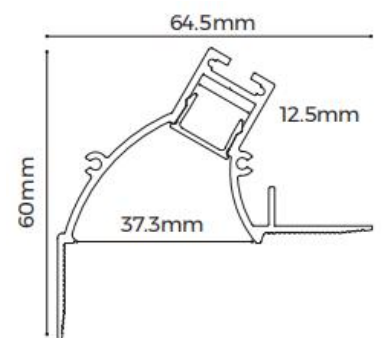

## Standard Configuration



| Picture                                                                           | Item     | Parameter                                                                                                                                                    |
|-----------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Profile  | Profile weight : 1.71kg/2.5m<br>Size : L2500*W64.5*H60mm<br>Material : AL6063-T5<br>Surface processing : Spraying RAL9003                                    |
|  | Cover    | Type: Frosted diffuse<br>Material: PC<br>Light transmittance : 60%<br>Size : L2500*W13.5*H8.5mm<br>(shrink) 0.8mm/m when the temperature rises (drops) 10°C. |
|  | End caps | Size : L43.3*W40*H1.5mm<br>Material : AL6063-T5                                                                                                              |

## Optional Accessories


| Picture                                                                             | Item                            | Parameter                                                                                                                                              |
|-------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Flexible strip<br>D6280-24V-8mm | Material : FPC , CCT : 2700/3000/4000/6000K ; Ra > 90;<br>Voltage:24V ; Power : 15W/m ; Lumen : 1650Lm/m ; PCB width : 8mm ; Minimum cut : 7LED/25mm ; |
|  | Screw                           | Size : M3.5*40mm<br>Material : Carbon steel                                                                                                            |

## Optical Parameter

(D6280-24V-8mm light source, frosted diffuser)

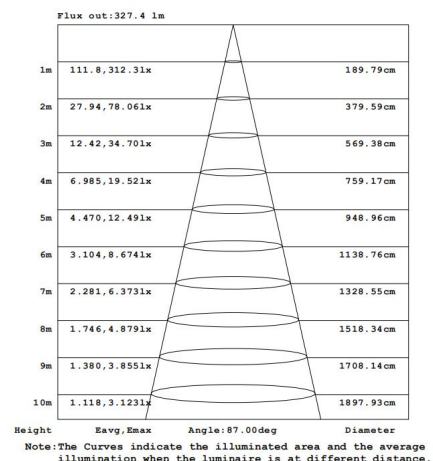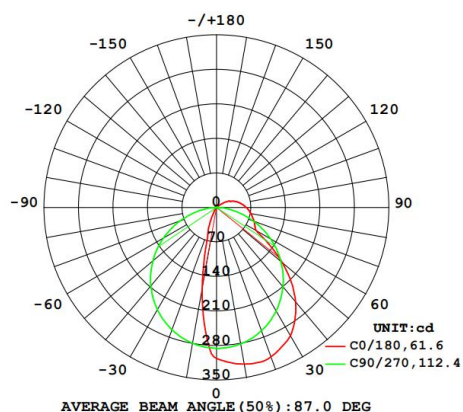

## Package

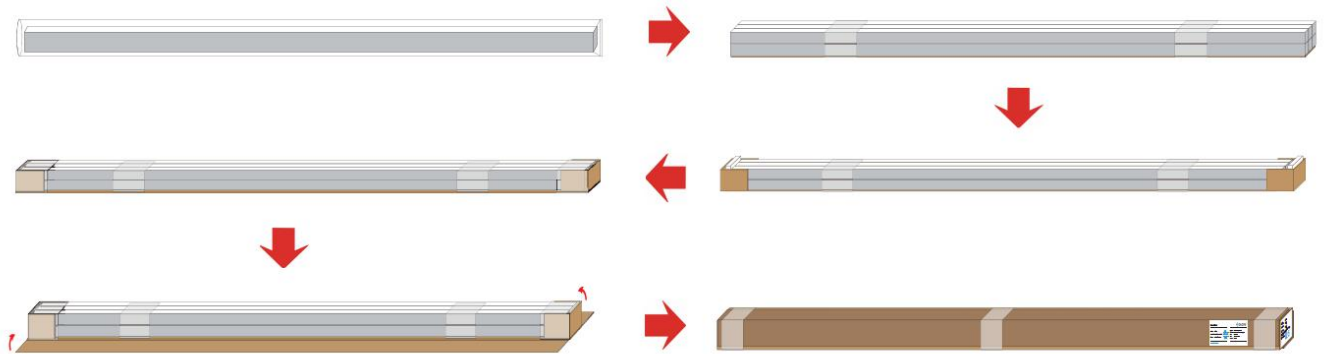

| Item              | Type        | Size(mm)       | NW(kg) | GW(kg) | Content   |
|-------------------|-------------|----------------|--------|--------|-----------|
| Profile and cover | Packing box | 2600*210*150mm | 20.5   | 22.7   | 12pcs/box |