

Specification

Curve Lighting System

AS3535-08A45/08A90





AS3535-08A45/08A90



Features

- Various installation ways: pendant, recessed and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

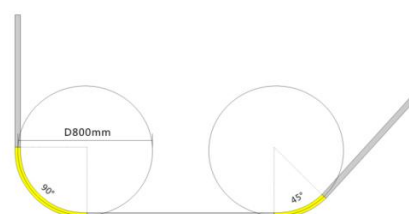

Details





Optional Accessories

Picture	Item	Parameter
	①Profile	Material : AL6063-T5 Profile weight : 0.26kg/ D800mm , 45° Size : 35x35mm , D800mm , 45° 35x35mm , D800mm , 90° Surface processing: Spray
	②Cover	Size : L20000*W32*H3.5mm Light transmittance: 60%
	③End cap	Size : L35*W35*H1.5mm
	④Rigid modular DY8140-24V-20mm-08A45	Material : AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 5.8W/pcs ; Lumen : 650Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs ;
	⑤Screw set	Size : M3.5*40mm

Picture	Item	Parameter
	Pendant cable PY-CBCA	Size : $\phi 250 \times H25\text{mm}$
	Pendant cable PN-WA2/4	Steel cable: D1.5*2000\4000mm\maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size:20AWG\2000mm\maximum load bearing:6.5Kg
	Recessed buckle RE-13	Size : L78*W34*H15mm
	Connect fitting EX-26	Size : L30*W23.5*H4.6mm
	Surface mounted buckle CL-05	

Optical Parameter

AS3535-08A45 module/DY8140-24V-20mm-08A45 light source, frosted diffuser

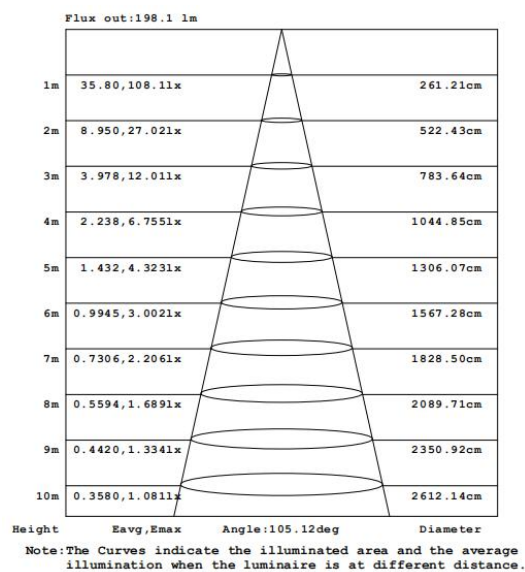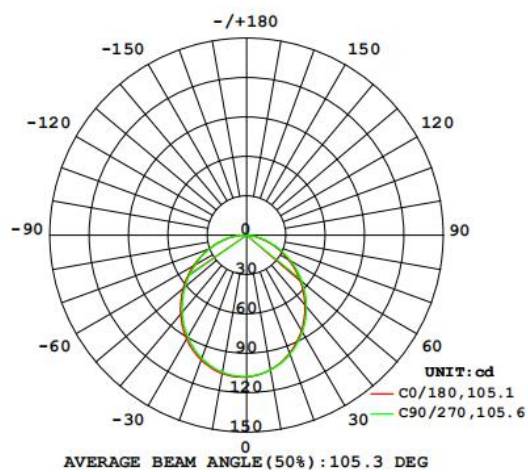

Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
08A45	Hat box	390*240*148mm	5.76	8.76	18pcs/box
08A90	Hat box	658*315*148mm	11.52	14.52	18pcs/box