

# Specification

Curve Lighting System

AS3535-03A90





## AS3535-03A90



### Features

- Various installation ways: pendant, recessed and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

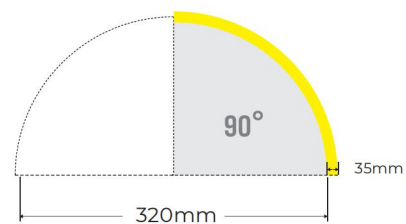

## Details





## Optional Accessories

| Picture                                                                             | Item                                    | Parameter                                                                                                                                                                           |
|-------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | ①Profile                                | Material : AL6063-T5<br>Profile weight : 0.24kg/ D320mm , 90°<br>Size : 35x35mm , D320mm , 90°<br>Surface processing: Spray                                                         |
|  | ②Cover                                  | Size : L20000*W32*H3.5mm<br>Light transmittance: 60%                                                                                                                                |
|  | ③End cap                                | Size : L35*W35*H1.5mm                                                                                                                                                               |
|  | ④Rigid modular<br>DY8140-24V-20mm-03A90 | Material : AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ;<br>CRI > 80 ; Voltage : 24V ; Power : 5.4W/pcs ; Lumen : 700Lm/pcs ;<br>Width : 20mm ; Minimum cutting unit : 14LEDs ; |
|  | ⑤Screw set                              | Size : M3.5*40mm                                                                                                                                                                    |

| Picture                                                                           | Item                            | Parameter                                               |
|-----------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------|
|  | Pendant cable<br>PN-WA2/4       | Steel cable: D1.5*2000\4000mm\maximum load bearing:13Kg |
|  | Pendant cable<br>PN-CA2/4       | Size:20AWG\2000mm\maximum load bearing:6.5Kg            |
|  | Recessed buckle<br>RE-13        | Size : L78*W34*H15mm                                    |
|  | Surface mounted buckle<br>CL-05 |                                                         |

## Optical Parameter

AS3535-03A90 module/DY8140-24V-20mm-03A90 light source, frosted diffuser

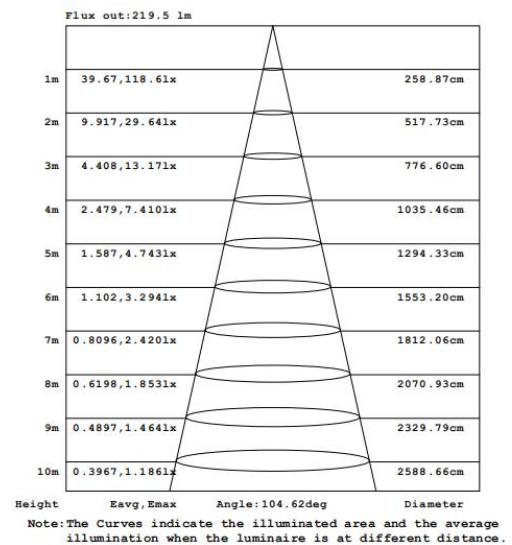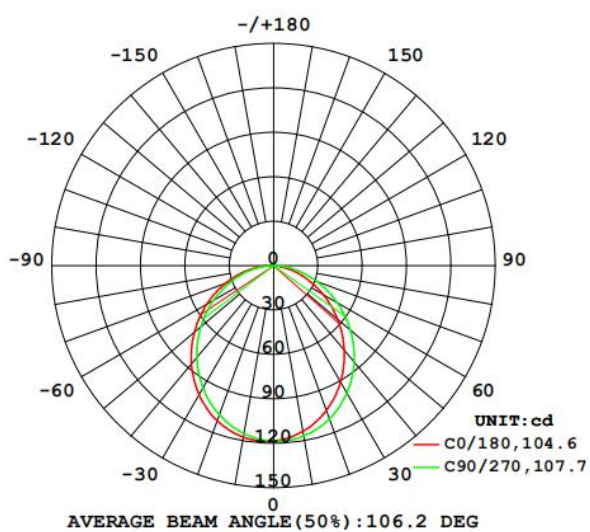

## Package



| Components | Packaging material | Size(mm)      | NW(kg) | GW(kg) | Content   |
|------------|--------------------|---------------|--------|--------|-----------|
| 03A90      | Hat box            | 365*365*190mm | 4.8kg  | 6.2kg  | 20pcs/box |