


Standard Luminaire

SEL Standard Linear Luminaire, based on the stylish lighting system, and by means of more professional optical designs, such as anti-glare, spotlighting, bidirectional polarizing, wall-washing and wall-grazing as well as advanced standards of heat dissipation and photoelectric indicators, are used to reach the professional indoor functional lighting, accent lighting and special lighting demands. After the continuous upgrade of linear lighting module, the free interconnection with track and intelligent dimming control, the linear lighting will lead the lighting trends in the future.

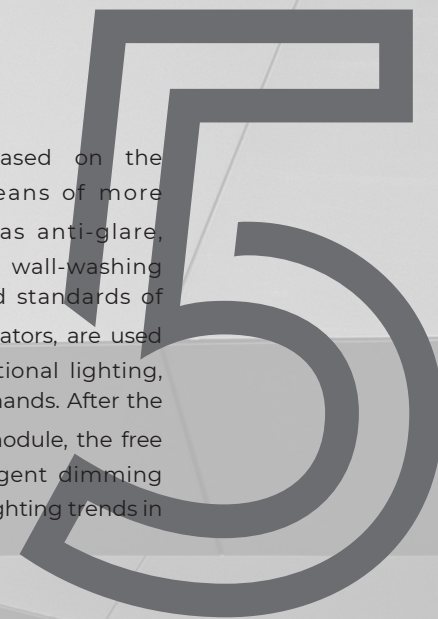


Product Series

Linear luminaires include two series : SLIM Series and GLS40 Series.

SLIM Series

SEL Slim series, standard mini-size linear luminaires, eight optical lighting method built by professional lighting and structural design, meeting the requirements of indoor functional lighting, accent lighting, and special lighting.

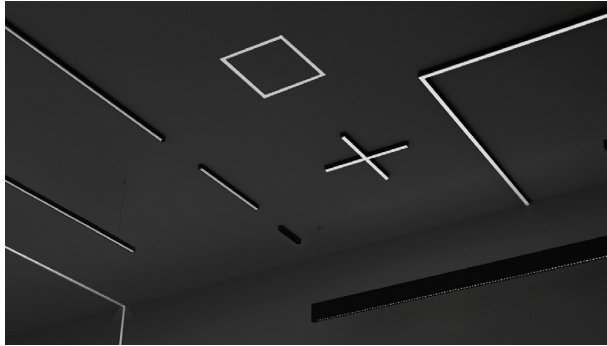





GLS40 Series

SEL GLS40 series. The product adopts a modernist design style, which combines simplicity and elegance. It is meticulously crafted and cares for every detail. The light and shadow follow, the styles are diverse, you can choose, and the more humane intelligent design is just to satisfy your ultimate lighting experience.




Curve series

The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres. There are also multiple mounting methods optional: pendant, recessed, surface mounted and wall mounted, which are all perfectly compatible to the spacial structures of different areas, different rigidity and different materials.

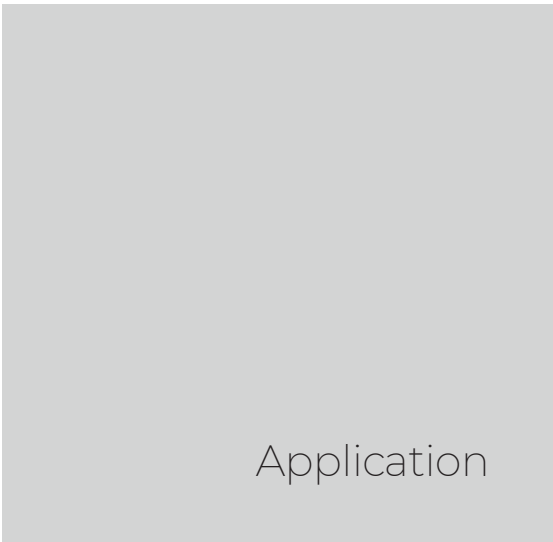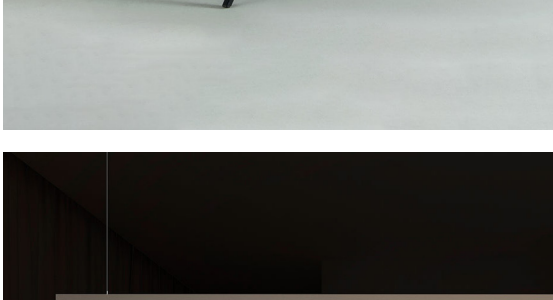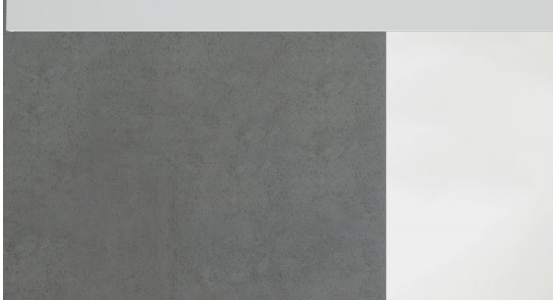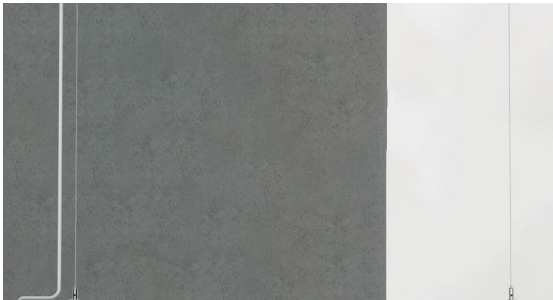























Application

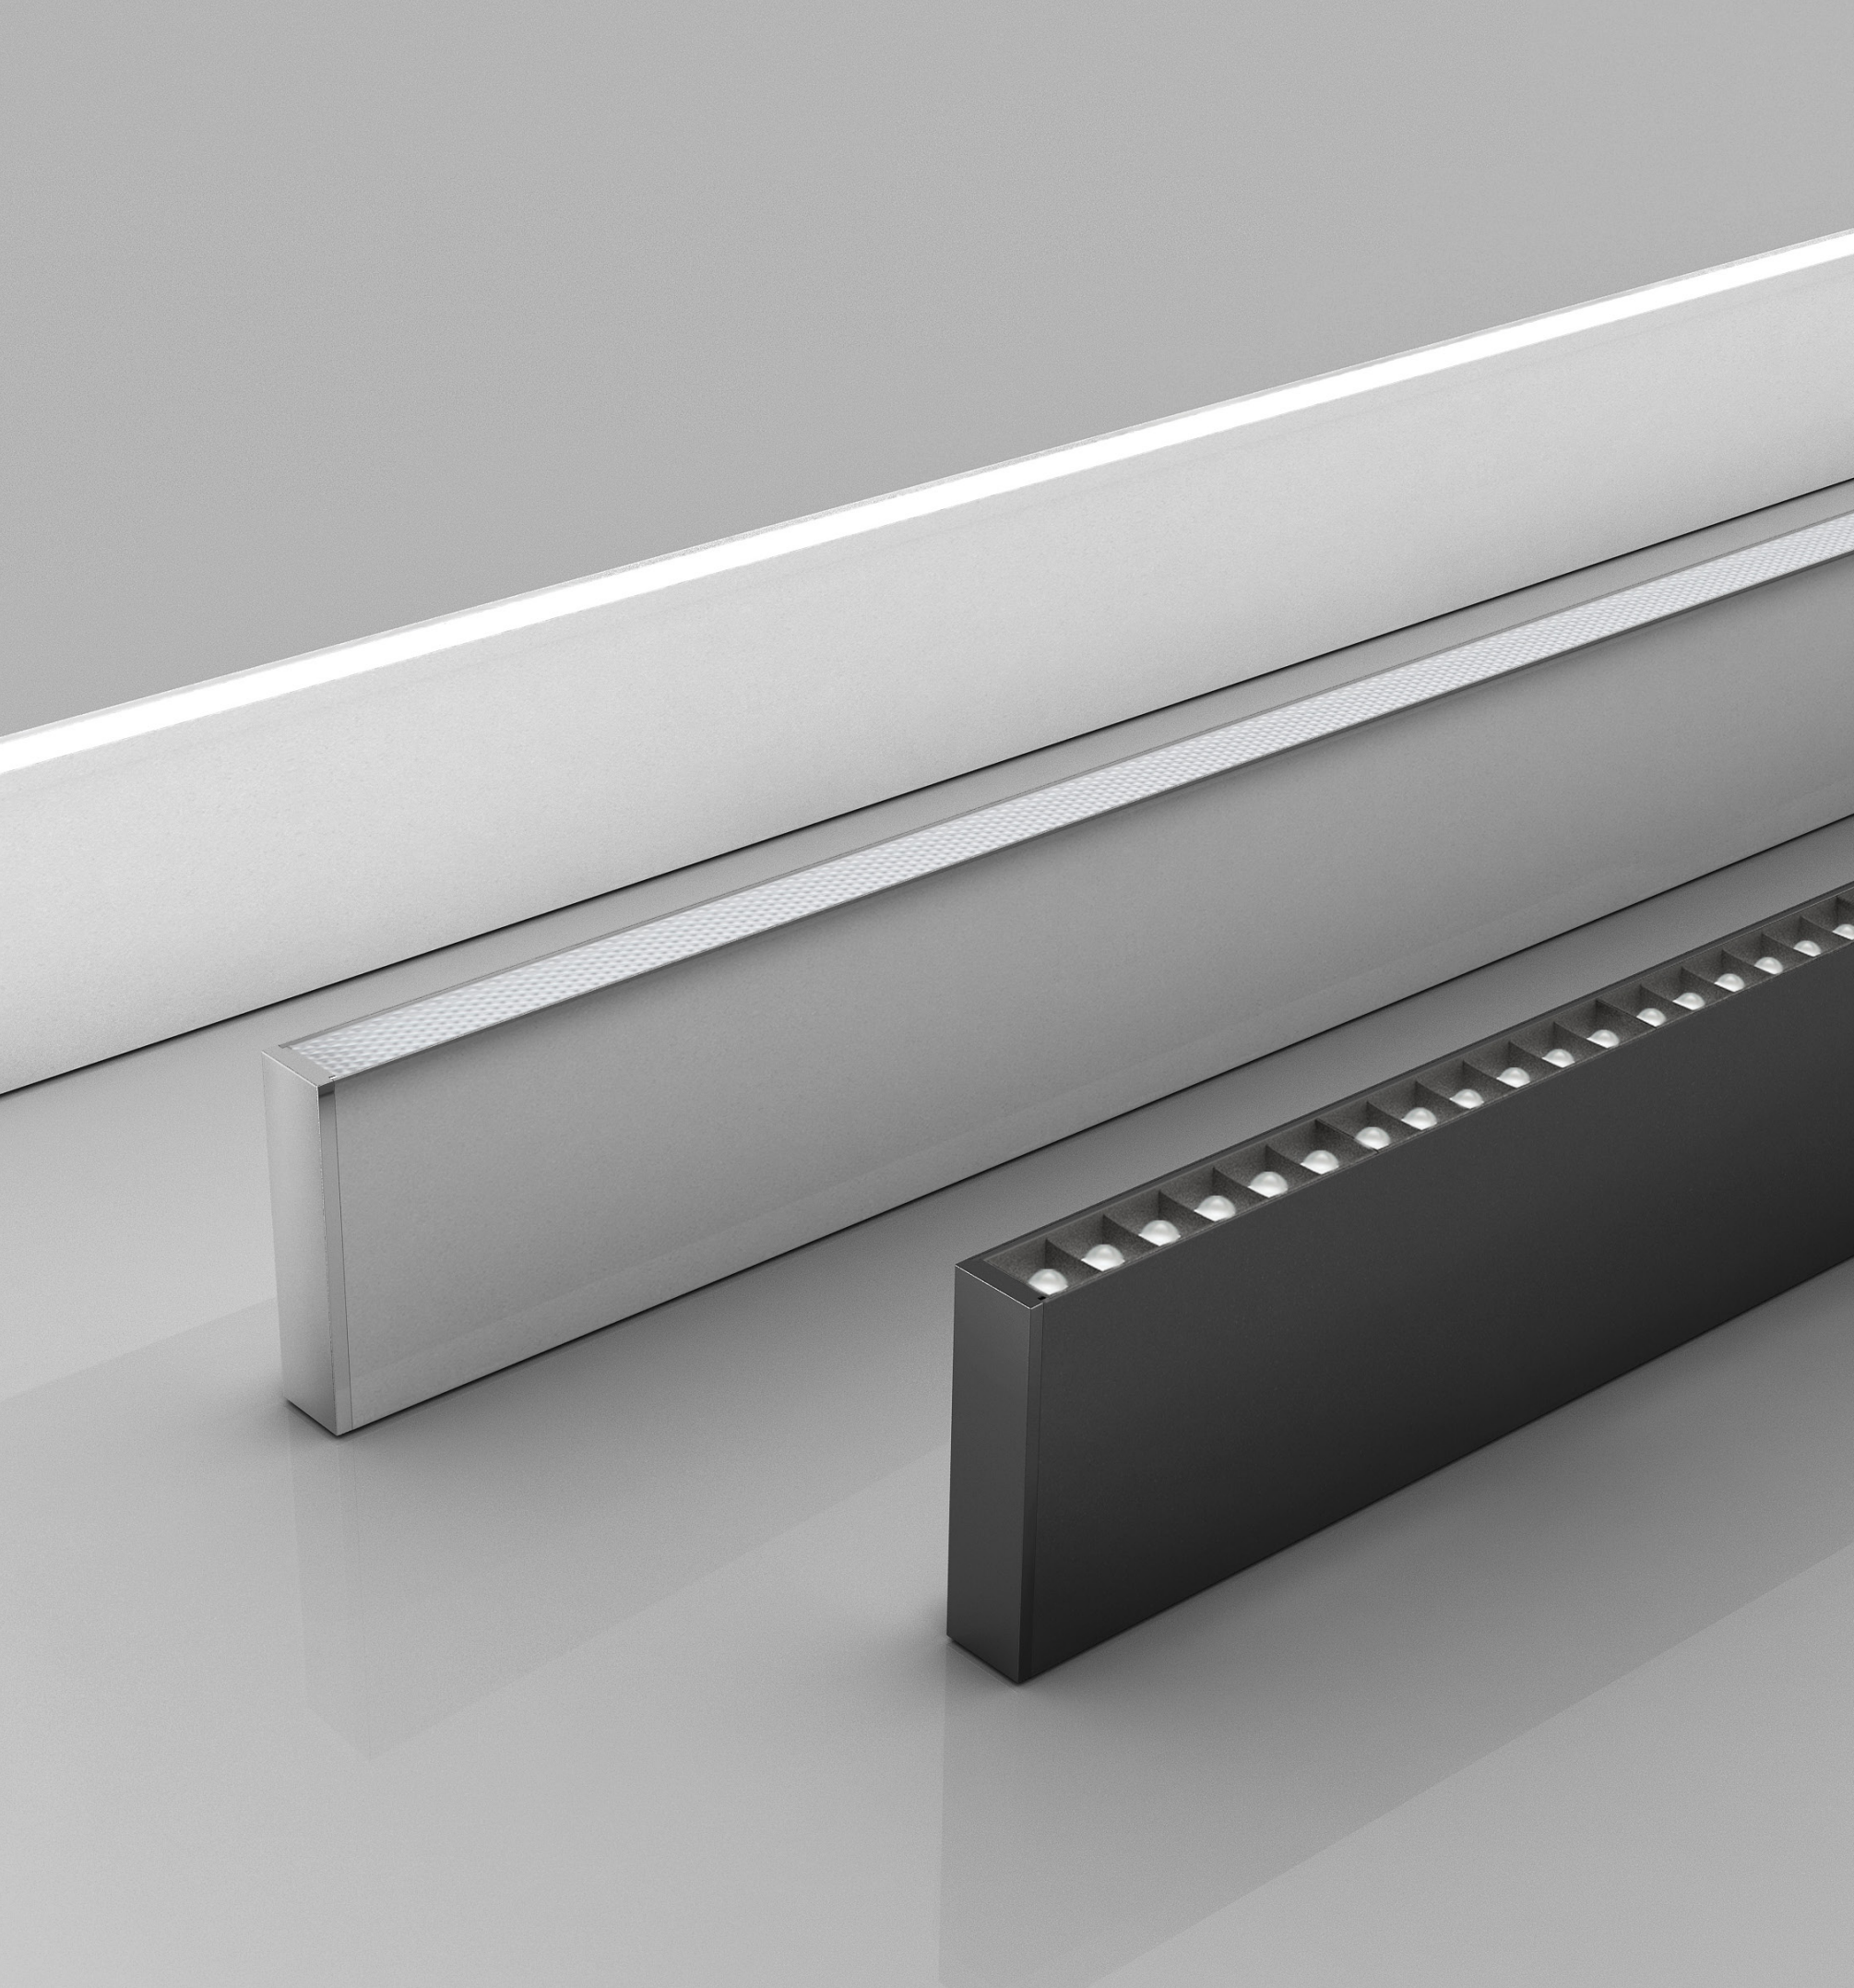



SLIM Series

SEL Slim series, standard mini-size linear luminaires, eight optical lighting method built by professional lighting and structural design, meeting the requirements of indoor functional lighting, accent lighting, and special lighting.

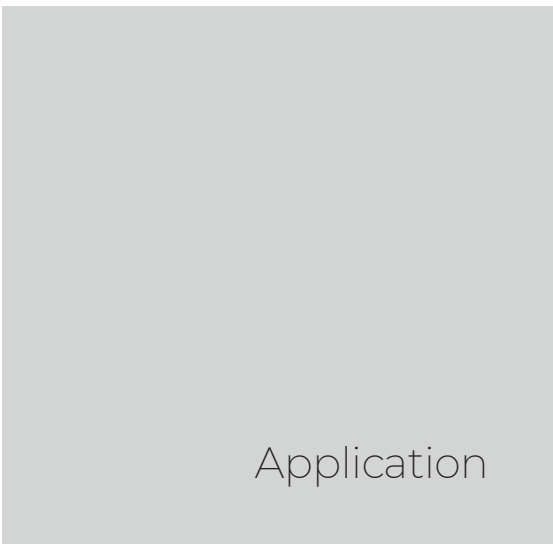

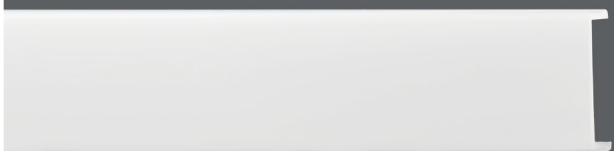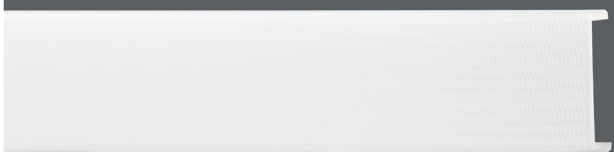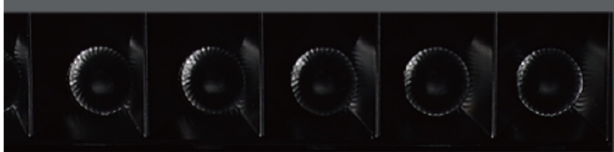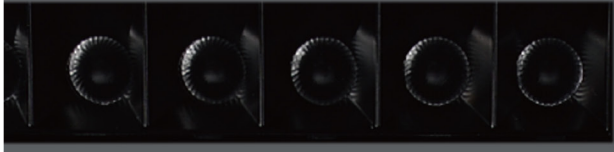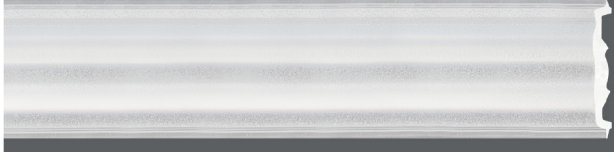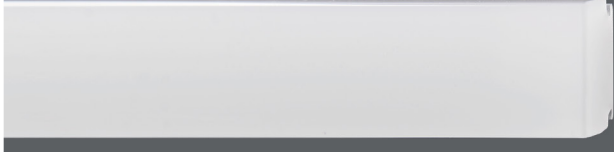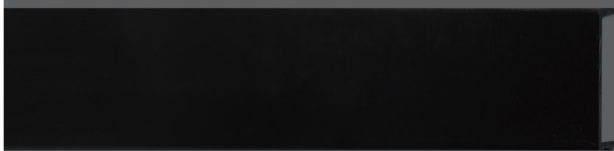	Diffuser		
	Microprism		
	Grating 30°		
	Grating 60°		
	Asymmetric		
	Double asymmetric		
	Block frosted diffuser		
	Blind cover		

- Up and down lighting design with suspension way , 25mm slender lighting surface .
- 105 Lm/w high light efficiency design , lumen output up to 4200 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection
- Multiple light distribution options (Diffuser , Microprism , Grating 30°, Grating 60°) to meet variety application requirements
- Electric wire& suspension wire with two-in-one design, invisible and beautiful

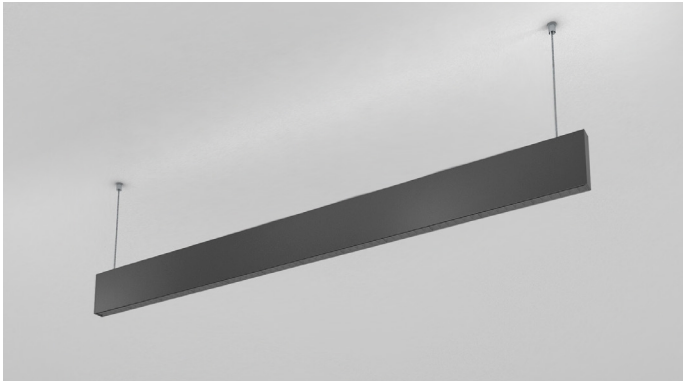

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐
	Spraying RAL9005 ☒ Anodizing ☐
CCT	2700K 3000K 4000K 5000K 6500K
CRI	Ra80/Ra90 N *only for 2700K/3000K E

	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser	Up: 12W / 950LM Down: 12W / 1250LM	Up: 24W / 1900LM Down: 24W / 2500LM	Up: 30W / 2400LM Down: 30W / 3150LM	Up: 36W / 2900LM Down: 36W / 3750LM	Up: 48W / 3850LM Down: 48W / 5000LM	Up: 11W / 880LM Down: 11W / 1155LM	Up: 16W / 1280LM Down: 16W / 1680LM	Up: 21W / 1680LM Down: 21W / 2205LM
Microprism	Up: 12W / 950LM Down: 12W / 1250LM	Up: 24W / 1900LM Down: 24W / 2500LM	Up: 30W / 2400LM Down: 30W / 3150LM	Up: 36W / 2900LM Down: 36W / 3750LM	Up: 48W / 3850LM Down: 48W / 5000LM	Up: 11W / 880LM Down: 11W / 1155LM	Up: 16W / 1280LM Down: 16W / 1680LM	Up: 21W / 1680LM Down: 21W / 2205LM
Grating 30°	Up: 12W / 950LM Down: 12W / 850LM	Up: 24W / 1900LM Down: 24W / 1700LM	Up: 30W / 2400LM Down: 30W / 2100LM	Up: 36W / 2900LM Down: 36W / 2500LM	Up: 48W / 3850LM Down: 48W / 3500LM	/	/	/
Grating 60°	Up: 12W / 950LM Down: 12W / 700LM	Up: 24W / 1900LM Down: 24W / 1400LM	Up: 30W / 2400LM Down: 30W / 1800LM	Up: 36W / 2900LM Down: 36W / 2300LM	Up: 48W / 3850LM Down: 48W / 3100LM	/	/	/
Blind cover	/	/	/	/	/	Available	Available	Available

Ordering Code																																			
Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type																	
LLS	-	Pendant Lighting upward& downward	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	-	24VDC flexible strip	F	40W/m	40	2700K	SW	>80	8	No Power	X	-	SEL Individual	D	SEL	C				
					Grating	G	Micro-prism	P							White		W				1200mm	24VDC Rigid module	R	3000K						WW		>90	9	Customized	S
							30°	F							Black		B				1500mm		4000K	NW											
							60°	H													1800mm		5000K	DW											
																					2400mm		6500K	W											
LLS	-		LH	25		F	D		X	S		S	2400	-		F		40		NW		8		X	-		D		C						

Ordering luminaires kits



SEL-LLS-LH25FDXSS2400-F40NW8X-

Diffuser/Microprism

Grating 30°/60°


Blind cover

Standard length		
600mm		2400mm
1200mm		1800mm
1500mm		1500mm
1800mm		1200mm
2400mm		600mm

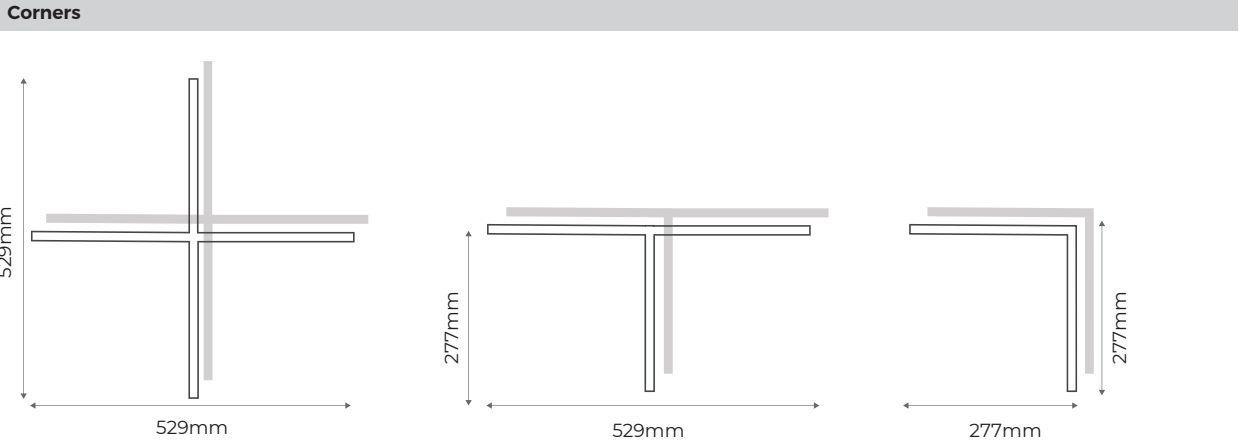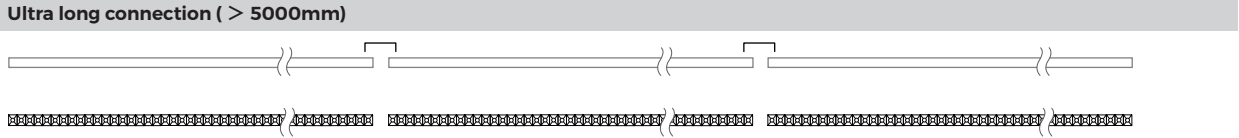

SEL-LS25(DC24V)

- 25mm slender lighting surface
- 105 Lm/w high light efficiency design , lumen output up to 2100 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- Multiple light distribution options (Diffuser , Microprism, Grating 30°, Grating 60°, Block frosted diffuser) to meet variety application requirements .
- Electric wire& suspension wire with two-in-one design, invisible and beautiful .



Basic Parameters

Profile material

AL6063-T5

Surface processing

Spraying RAL9003

☐

Spraying RAL9005

☒

Anodizing

☐

CCT

2700 K

3000 K

4000 K

5000 K

6500 K

CRI

Ra80/Ra90 N *only for 2700 K/3000 K

		600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		12W /1250LM	24W /2500LM	30W /3150LM	36W /3750LM	48W /5000LM	11W /1155LM	16W /1680LM	21W /2205LM
Microprism		12W /1250LM	24W /2500LM	30W /3150LM	36W /3750LM	48W /5000LM	11W /1155LM	16W /1680LM	21W /2205LM
Grating 30°		12W /850LM	24W /1700LM	30W /2100LM	36W /2500LM	48W /3500LM	/	/	/
Grating 60°		12W /700LM	24W /1400LM	30W /1800LM	36W /2300LM	48W /3100LM	/	/	/
Block frosted diffuser		12W /1200LM	24W /2400LM	30W /3000LM	36W /3600LM	48W /4800LM	/	/	/
Blind cover		/	/	/	/	/	Available	Available	Available

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Pendant	LS	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL Individual	D	SEL	C
					Grating	G	Micro-prism	P	Carrier	F	White	W			1200mm		24VDC Rigid module	R			3000K	WW	>90	9						Customized	S
					Square	K	30°	F			Black	B			1500mm						4000K	NW									
							60°	H							1800mm						5000K	DW									
															2400mm						6500K	W									
LLS	-		LS	25	F	D	X	S	S	2400	-	F	20	NW	8	X	-	D	C												

Ordering luminaires kits

SEL-LLS-LS25FDXS2400-F20NW8X-DC




Diffuser/Microprism/Block frosted diffuser Grating 30°/60° Blind cover


Standard length

600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm
600mm			
1200mm			
1500mm			
1800mm			
2400mm			


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)





Corners

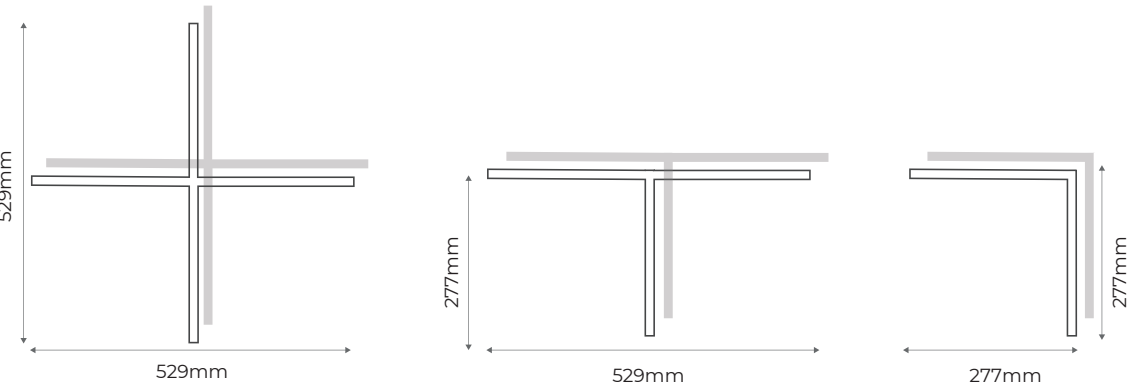

SEL-LM25(DC24V)

- 25mm slender lighting surface .
- 125 Lm/w high light efficiency design , lumen output up to 2300 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- Multiple light distribution options (Diffuser , Microprism , Grating 30°, Grating 60°, Block frosted diffuser , AsymmetricP Double Asymmetric) to meet variety application requirements .
- Provide surface mounted buckle , more convenient installation .

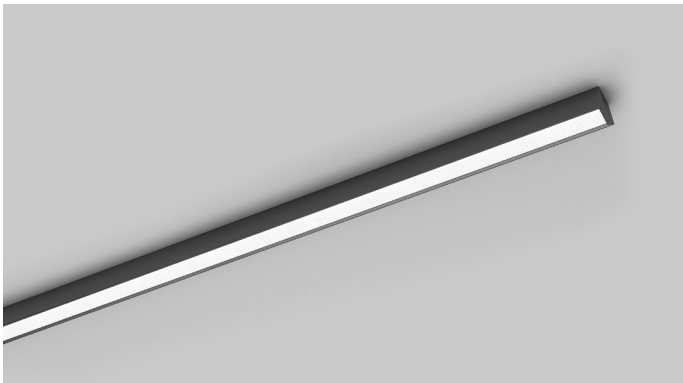

Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing ☐		
CCT	2700 K3000 K4000 K5000 K6500 K		
CRI	Ra80/Ra90 N *only for 2700 K/3000 K		

		190mm	600mm	1200mm	1500mm	1800mm	2400mm	L'(277"277mm)	T'(529"277mm)	X'(529"529mm)
Diffuser		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Microprism		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Grating 30°		4W/300LM	12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM	/	/	/
Grating 60°		4W/250LM	12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM	/	/	/
Block frosted diffuser		/	12W/1200LM	24W/2400LM	30W/3000LM	36W/3600LM	48W/4800LM	/	/	/
Asymmetric		4W/500LM	12W/1500LM	24W/3000LM	30W/3750LM	36W/4500LM	48W/6000LM			
Double asymmetric		4W/500LM	12W/1500LM	24W/3000LM	30W/3750LM	36W/4500LM	48W/6000LM			
Blind cover		/	/	/	/	/	/	Available	Available	Available

Ordering Code


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Surface mounted	LM	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	190mm	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL Individual	D	SEL	C
					Grating	G	Micro-prism	P	Flat	X	White	W			600mm		24VDC Rigid module	R				3000K	WW	>90	9					Customized	S
					Square	K	30°	F			Black	B			1200mm							4000K	NW								
					Lens	L	60°	H							1500mm							5000K	DW								
								Asymmetric	A						1800mm							6500K	W								
						Double Asymmetric	S				2400mm																				
LLS	-		LM	25	F	D	X	S	S	2400	-	F	20	NW	8	X	-	D	C												

Ordering luminaires kits 🔍


Diffuser/Microprism Grating 30°/60° Asymmetric / Double asymmetric Block frosted diffuser Blind cover

Standard length			
600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm
			190mm
600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm
			190mm


Customized length (2400mm ~ 5000mm)

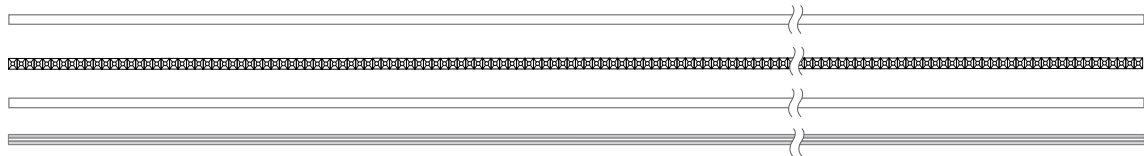

Ultra long connection (> 5000mm)


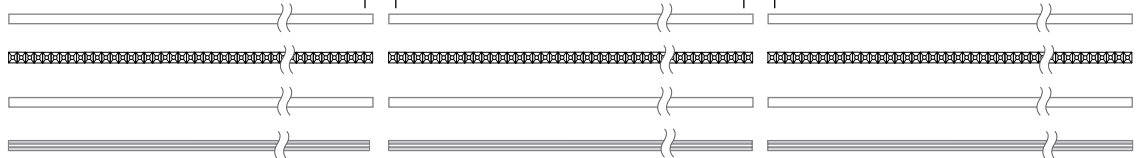


Corners

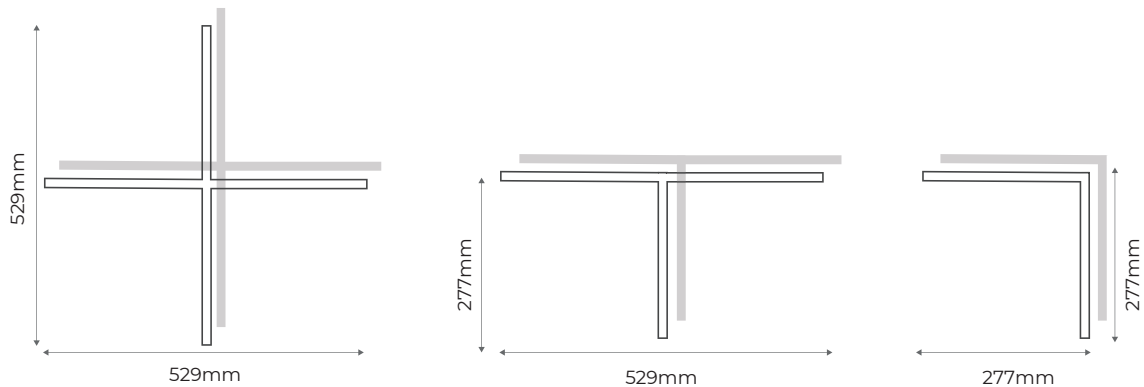

SEL-LE25(DC24V)

- 25mm slender lighting surface .
- 125 Lm/w high light efficiency design , lumen output up to 2300 Lm/m .
- Multiple light distribution options (Diffuser , Microprism , Grating 30°, Grating 60°, Asymmetric , Double Asymmetric) to meet variety application requirements .
- Butterfly clip design , more convenient installation .

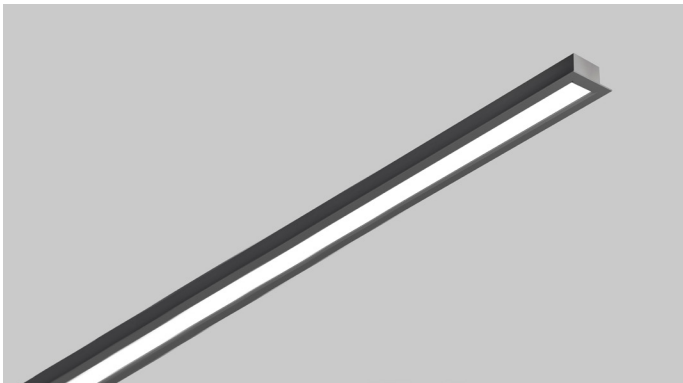

Basic Parameters

Profile materialAL6063-T5

Surface processing

Spraying RAL9003

Spraying RAL9005

Anodizing

CCT

2700 K

3000 K

4000 K

5000 K

6500 K

CRI

Ra80/Ra90

N

*only for 2700 K/3000 K

	190mm	600mm	1200mm	1500mm	1800mm	2400mm	L'(277"277mm)	T'(529"277mm)	X'(529"529mm)
Diffuser	4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM	11W / 1155LM	16W / 1680LM	21W / 2205LM
Microprism	4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM	11W / 1155LM	16W / 1680LM	21W / 2205LM
Grating 30°	4W / 300LM	12W / 850LM	24W / 1700LM	30W / 2100LM	36W / 2500LM	48W / 3500LM	/	/	/
Grating 60°	4W / 250LM	12W / 700LM	24W / 1400LM	30W / 1800LM	36W / 2300LM	48W / 3100LM	/	/	/
Asymmetric	4W / 500LM	12W / 1500LM	24W / 3000LM	30W / 3750LM	36W / 4500LM	48W / 6000LM			
Double asymmetric	4W / 500LM	12W / 1500LM	24W / 3000LM	30W / 3750LM	36W / 4500LM	48W / 6000LM			
Blind cover	/	/	/	/	/	/	Available	Available	Available



Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Recessed	LE	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	190mm	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL individual	D	SEL	C
					Grating	G	Micro-prism	P	Flat	F	White	W			600mm		24VDC Rigid module	R			3000K	WW	>90	9					Customized	S	
					Lens	L	30°	F			Black	B			1200mm						4000K	NW									
							60°	H							1500mm						5000K	DW									
							Asymmetric	A							1800mm						6500K	W									
							Double Asymmetric	S							2400mm																
LLS	-		LE	25		F		D		X		S		S	2400	-		F		20		NW		8		X	-		D		C


Ordering luminaires kitsSEL-LLS-LE25FDXSS2400-F20NW8X-DC

Diffuser/MicroprismGrating 30°60°Asymmetric / Double asymmetricBlind cover



Standard length		
190mm		2400mm
600mm		1800mm
1200mm		1500mm
1500mm		1200mm
1800mm		600mm
2400mm		190mm
190mm		
600mm		
1200mm		
1500mm		
1800mm		
2400mm		

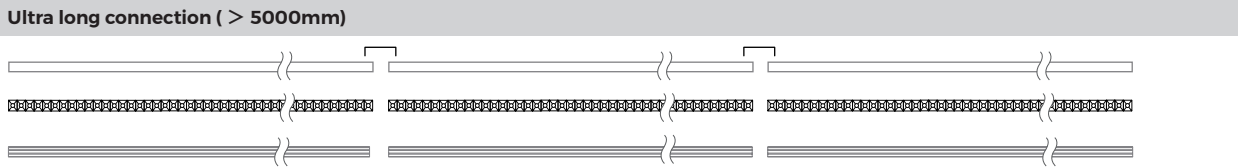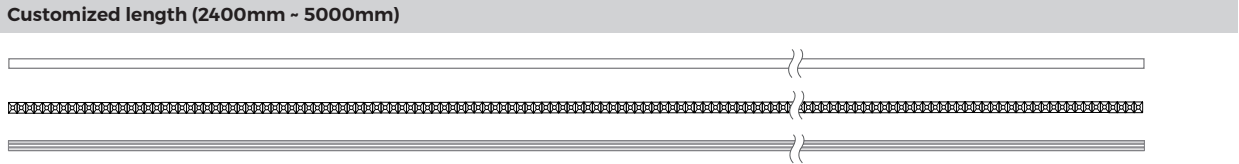

Corners

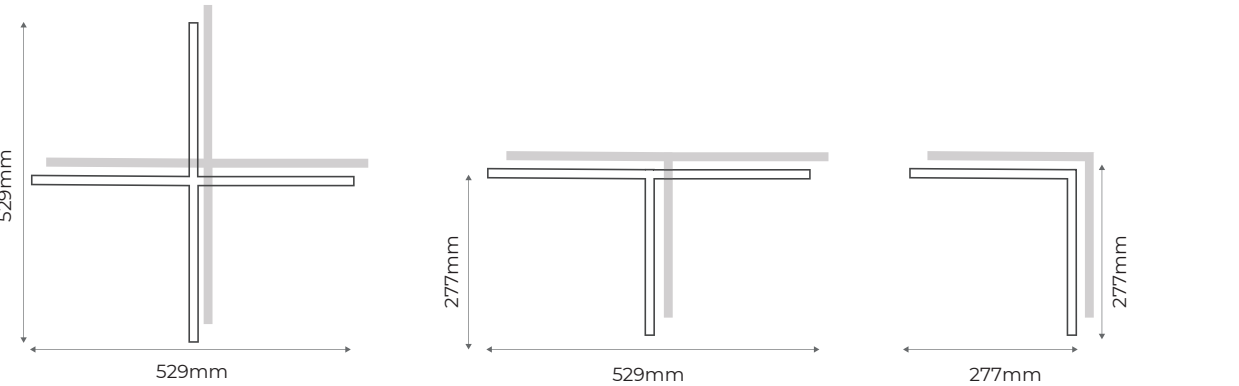

- Up and down lighting design with wall mounted way , 25mm slender lighting surface .
- 105 Lm/w high light efficiency design,lumen output up to 4200 Lm/m .
- Germany brand PC diffuser with uniform and soft light output
- Built-in power , invisible and beautiful

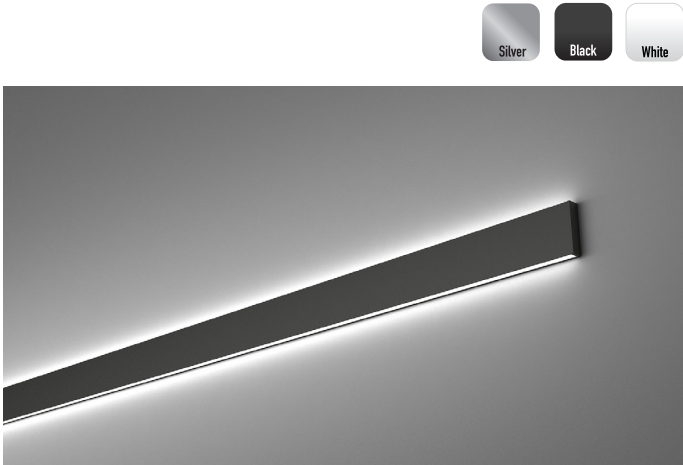

☐ Diffuser/Micropism

Basic Parameters

Profile material

AL6063-T5

Surface processing

Spraying RAL9003

☐

Spraying RAL9005

☒

Anodizing

☐

CCT

2700K

3000K

4000K

5000K

6500K

CRI

Ra80/Ra90N *only for 2700K/3000K

Standard length

600mm

1200mm

1500mm

1800mm

2400mm

Customized length (2400mm ~ 5000mm)

	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser	27W / 2266LM	52W / 4632LM	65W / 5665LM	80W / 7040LM	100W / 9064LM

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Wall mounted Lighting upward& downward	LC	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	-	24VDC flexible strip	F	40W/m	40	2700K	SW	>80	8	No Dimming	N	-	SEL individual	D	SEL	C
											White	W	1200mm	3000K	WW						>90	9	Customized	S							
											Black	B	1500mm	4000K	NW																
													1800mm	5000K	DW																
													2400mm	6500K	W																
LLS	-		LC	25		F		D		X	S		S	2400	-		F		40		LW		8		N	-		D		C	

Ordering luminaires kits





T-LINE 1 ”

T - LINE


T-Grid Linear Lighting



T-LINE 2 ”


T-LINE 2"

Recessed mounted


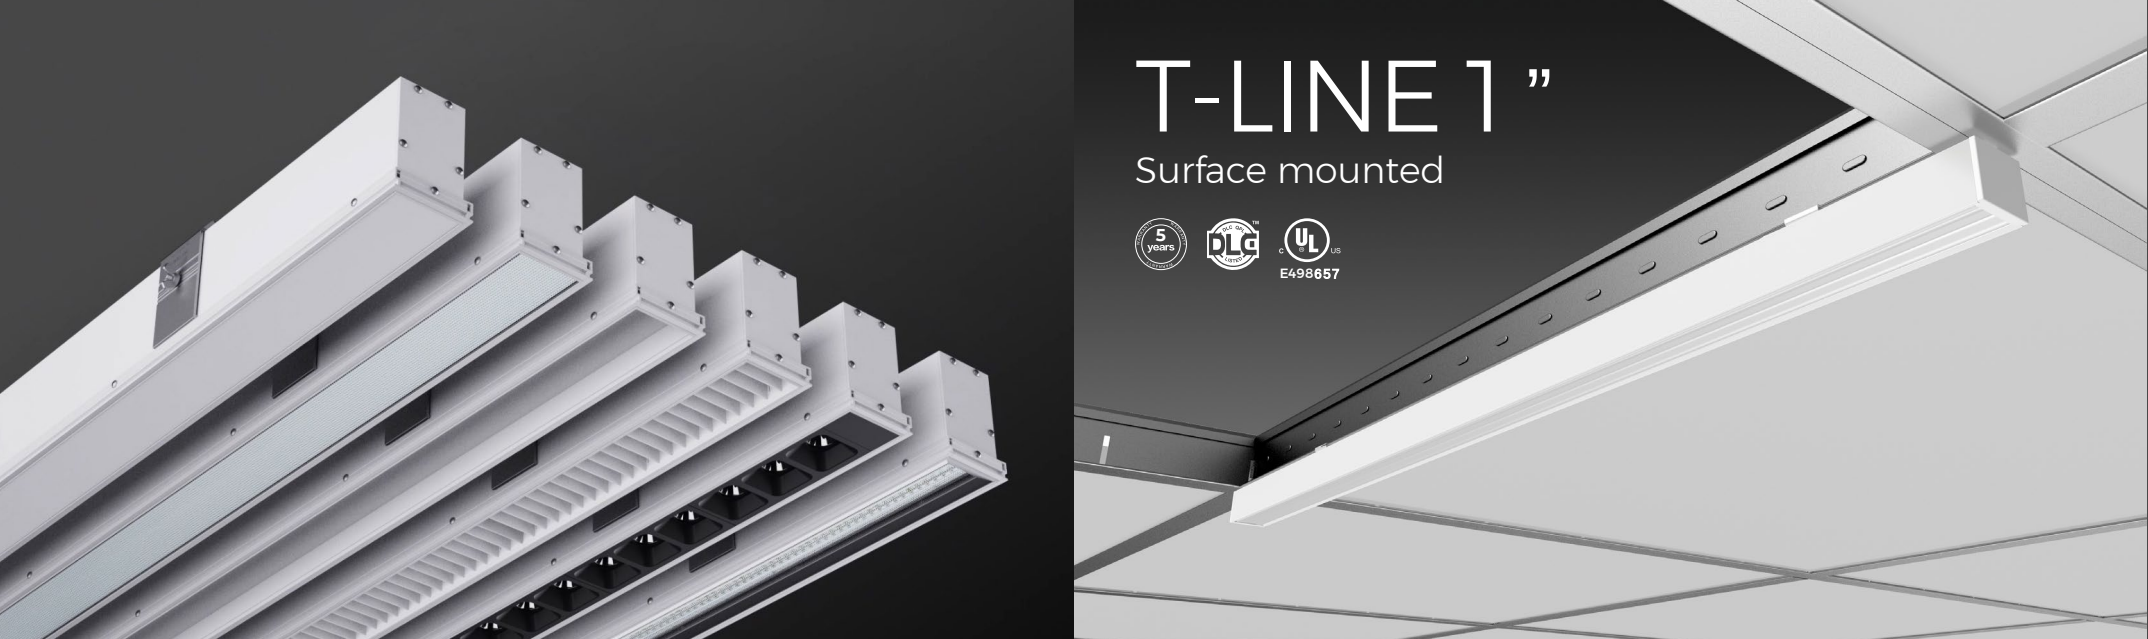


T-LINE 1"



Surface mounted




Model	SEL-LR5392FD
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Diffuser
Lumens	4200LM
Typ.power	40W
Beam angle	100°





Model	SEL-LR5392FP
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Microprism
Lumens	3600LM
Typ.power	40W
Beam angle	90°





Model	SEL-LR5392BD
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Blind Louver
Lumens	2700LM
Typ.power	40W
Beam angle	75°





Model	SEL-LR5392FR
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Regress
Lumens	3700LM
Typ.power	40W
Beam angle	100°



Model	SEL-LR5392G
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Grating
Lumens	2800LM
Typ.power	28W
Beam angle	15°/30°/45°





Model	SEL-LR5392LA
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Asymmetric
Lumens	3000LM
Typ.power	28W
Beam angle	90°x60°x15°





Model	SEL-LR5392LS
Size	1219"53"92mm (4"x2"x3-3/5")
Optical	Double Asymmetric
Lumens	3300LM
Typ.power	28W
Beam angle	100°x90°



Width Adjustment

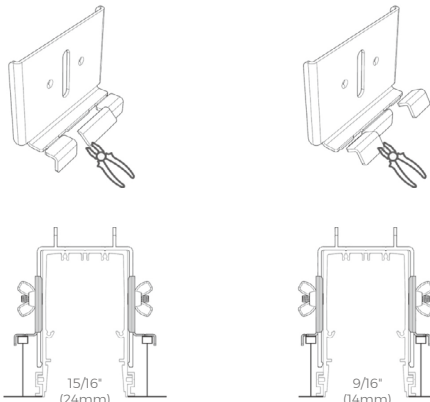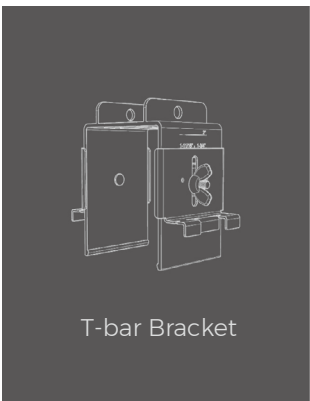


Height Adjustment

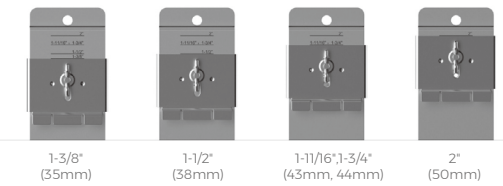



T-bar Recessed Mounting Options

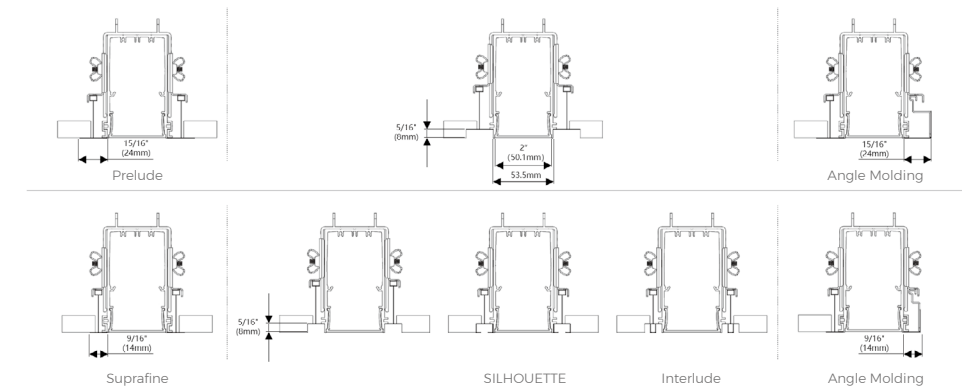


Model	SEL-LS2522FD
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Diffuser
Lumens	2200LM
Typ.power	24W
Beam angle	100°




Model	SEL-LS2522FP
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Microprism
Lumens	2400LM
Typ.power	24W
Beam angle	90°




Model	SEL-LS2522G
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Grating
Lumens	1800LM/1400LM
Typ.power	24W
Beam angle	30°/60°



Model	SEL-LS2522LA
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Asymmetric
Lumens	3000LM
Typ.power	24W
Beam angle	90°x45°x15°




Model	SEL-LS2522LS
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Double Asymmetric
Lumens	3000LM
Typ.power	24W
Beam angle	100°x90°



Model	SEL-LS2522KD
Size	1219"25"22mm (4"x15/16"x0.87")
Optical	Block Frosted diffuser
Lumens	2800LM
Typ.power	24W
Beam angle	165°

Patented Mounting Solution US ID: PAT5879375

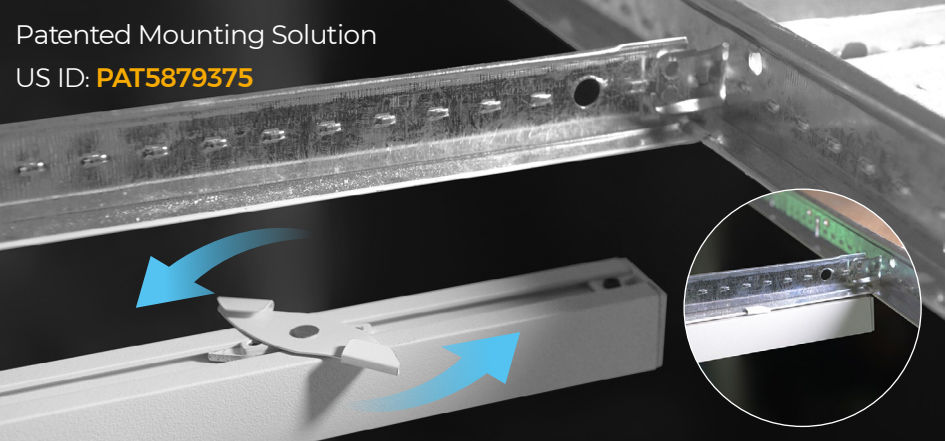

24VDC LED Driver 100W Power Supply 0-10V/PWM/Resistor 3-in-1 dimmable and non dimmable

