



Linear Lighting System

SEL The linear lighting system is based on the "flexible" and "splicable" linear light sources, strengthening the fixture structure and optics design, and makes the light to be an important interior design element. The continuous splicable linear light can travel freely across space, and can be combined into an infinite creative space shaping at will, meet the basic needs of flood lighting and image decoration. The final effect is very creative and futuristic, give a new choice for space design.




Product Series

Linear Lighting System includes Linear Lighting System LLS2.0, Linear Lighting System M-LINE 60, Curve Lighting System LLS-C and Linear Lighting System SKYLINE series.

LLS 2.0 Series

The System, by changing the modular design and installation method of the product, has redefined the function and application mode of linear lighting and has broken the constraints on traditional lighting system, which has achieved "three freedoms", namely, the design freedom of people, the installation freedom of product, and the application freedom of environment. LLS2.0 is iterated and upgraded based on the LLS 1.0 design with more corner accessories added to achieve more creative styles.

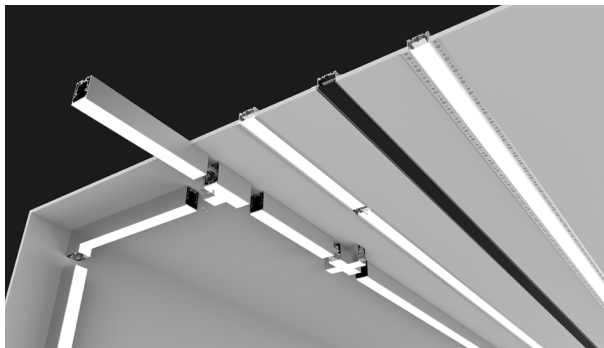


LLS-C Series

SEL Curve Lighting System, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The straight and curve basic modules are utilized to produce various circular luminaires, interconnect curves freely and intersperse combined structure randomly. limitless possibilities produce limitless imagination. The flowing light shuttles back and forth along the edge of ceilings, wall and floors, creating thousands of styles and opening new illumination horizons.




M-LINE 60 Series


SEL "M-LINE60" linear modular lighting system, combining wiring and lighting installation in one , different from traditional cumbersome installation, just need to pre-install the profile frame, then can switch 12 optical models at will Group, with more combination, it can accurately light up the space where light is needed, free light&shadow, applicable in many scenes.

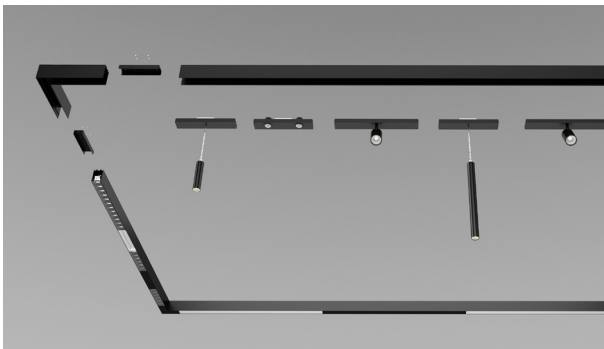

SKYLINE Series







SEL "SKYLINE series" connects two points to be one line, can be extremely free applied across space, and derive thousands of stylings, to bring a brand-new innovative experience to linear lighting, realize the purest linear beauty, and open up a new lighting experience.

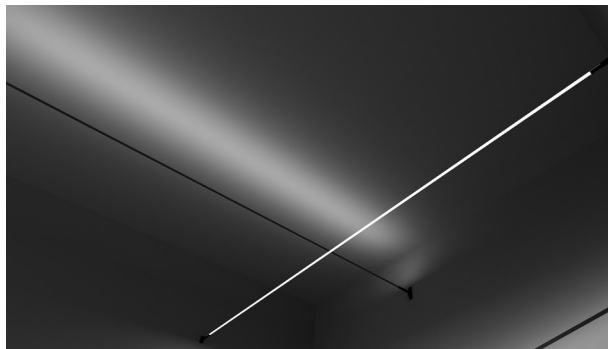

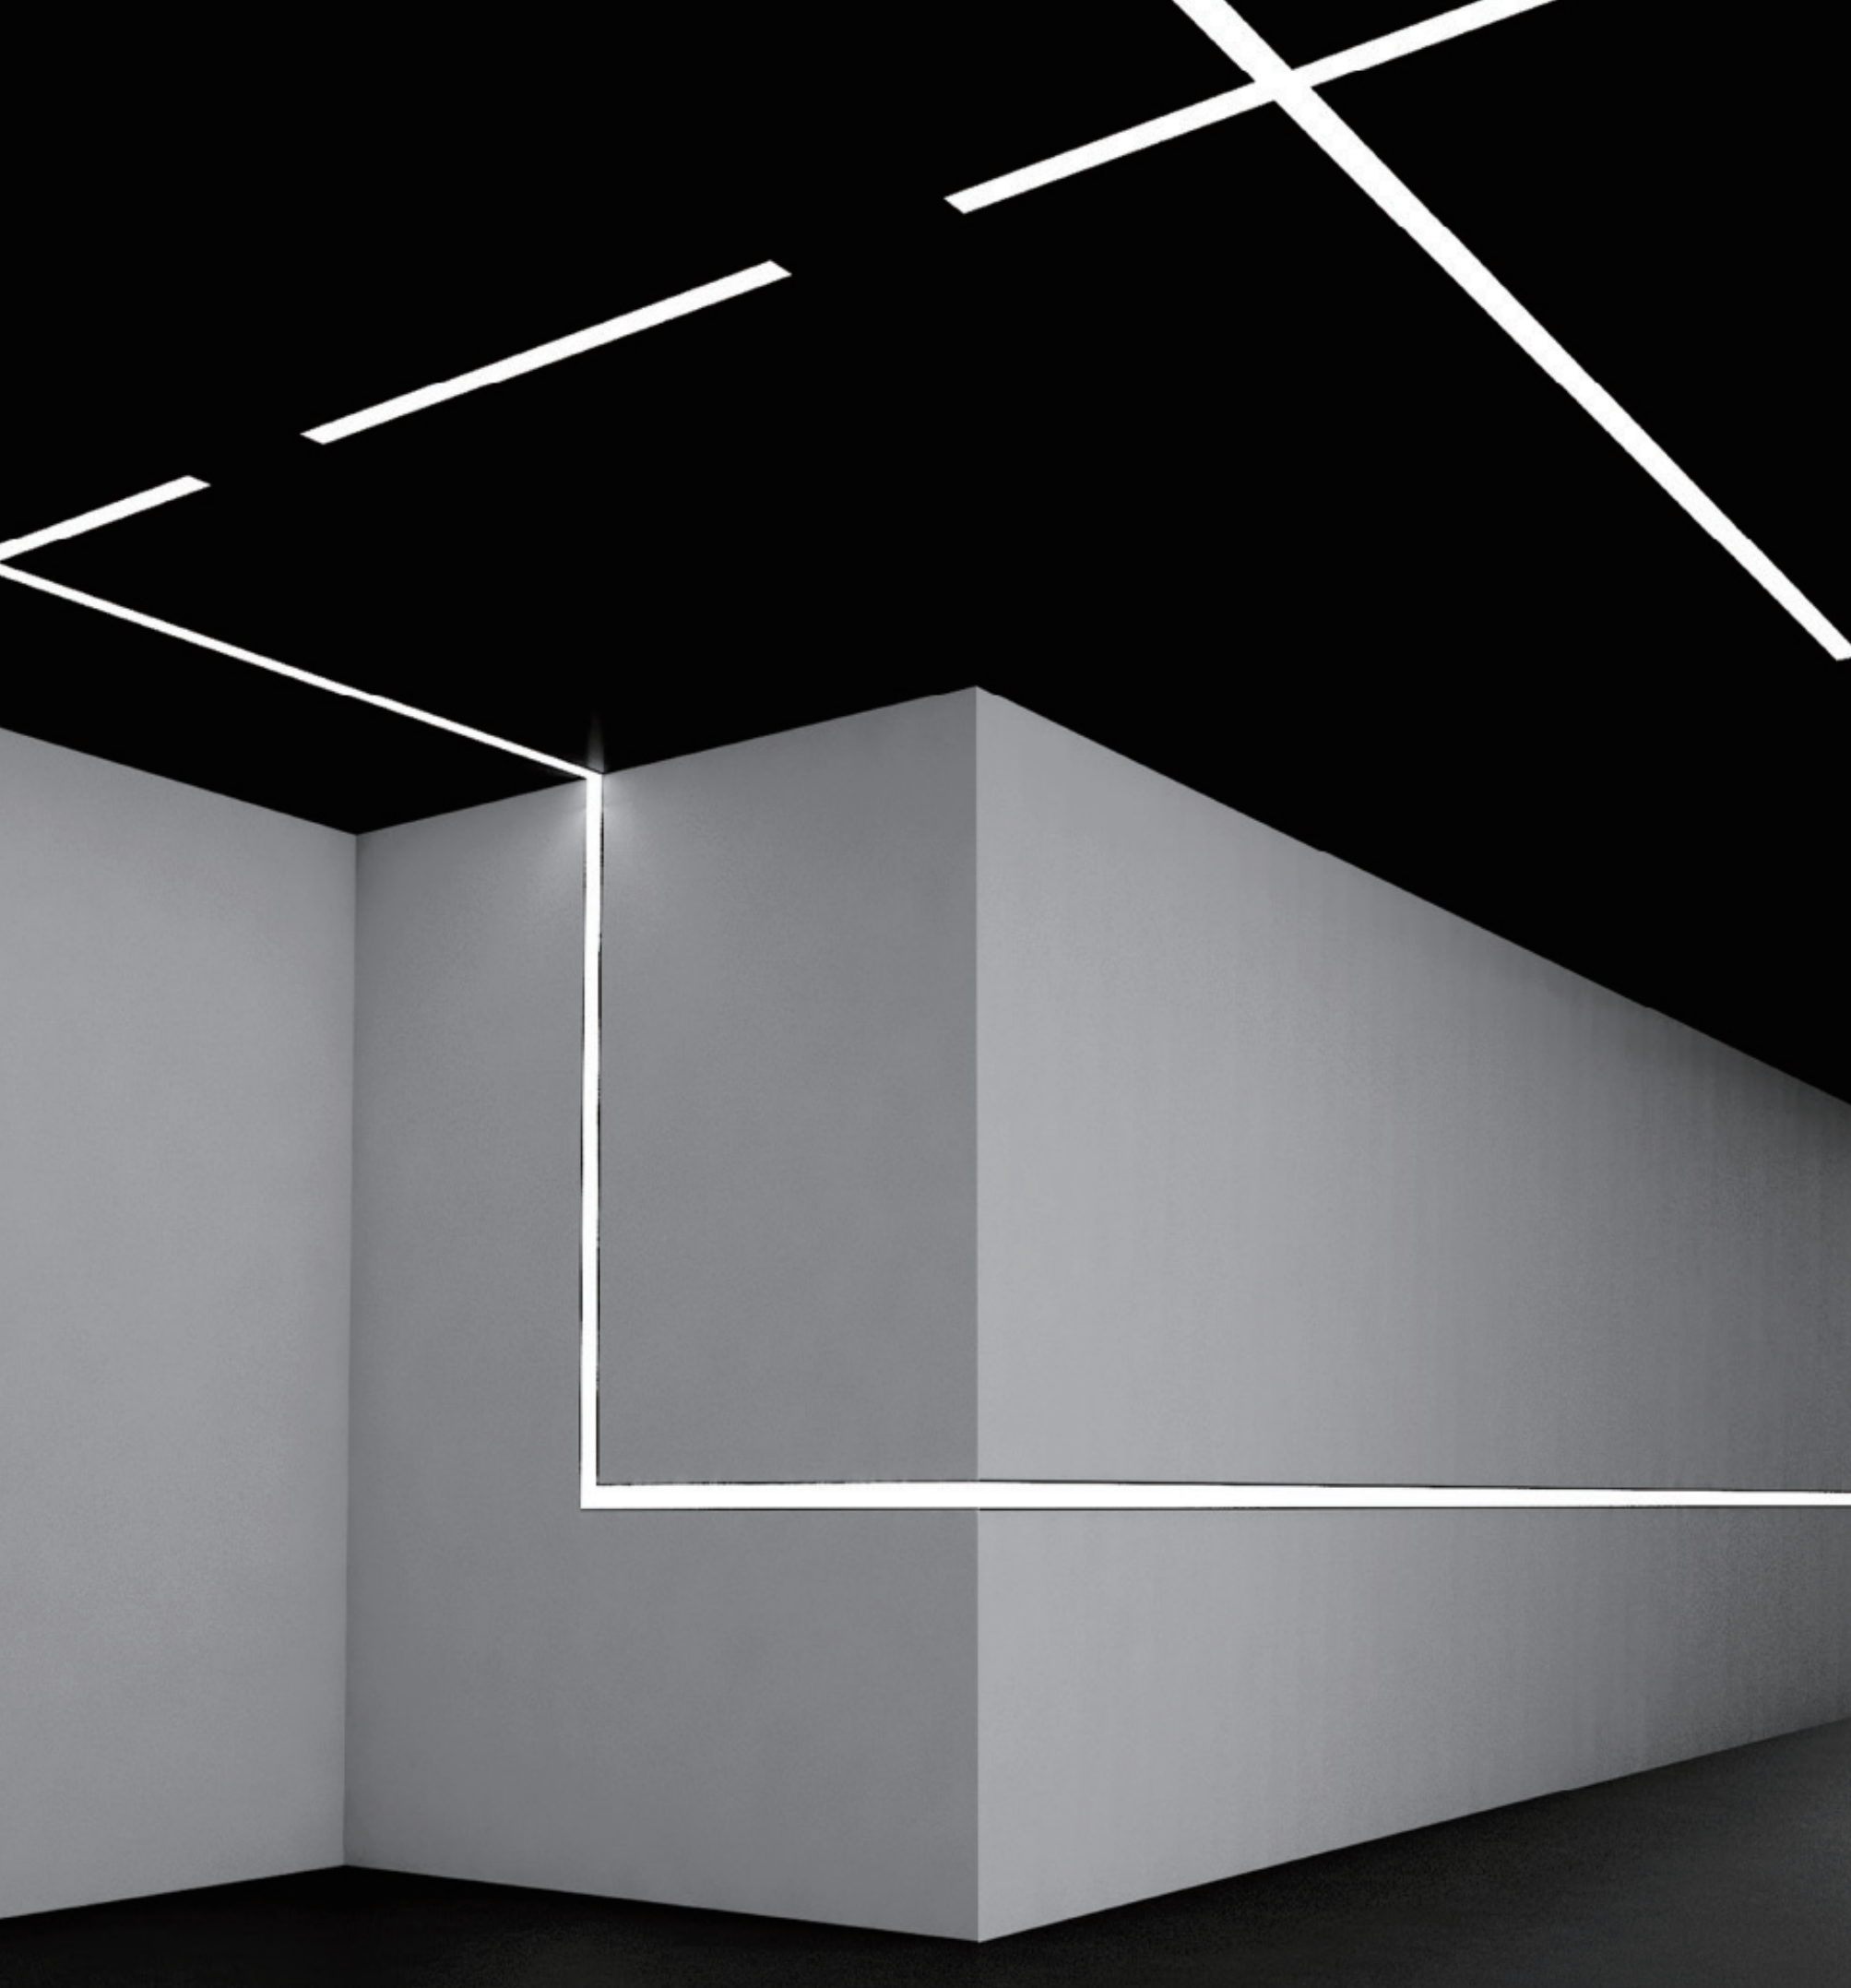

LLS 2.0 Series




The System, by changing the modular design and installation method of the product, has redefined the function and application mode of linear lighting and has broken the constraints on traditional lighting system, which has achieved "three freedoms", namely, the design freedom of people, the installation freedom of product, and the application freedom of environment. LLS2.0 is iterated and upgraded based on the LLS 1.0 design with more corner accessories added to achieve more creative styles.

Model	Drawing	Size L×W×H(mm)	Installation	Coating	Standard extender	Customizable corners	Light source
30mm (Luminous surface size)							
SEL-LS3360		2500×33×60					D8280-24V-15mm DY8280-24V-17mm
40mm (Luminous surface size)							
SEL-LS4067		2500×40×67					D8280-24V-20mm DY8280-24V-23mm
SEL-LE5535		2500×55×35					D8280-24V-20mm DY8280-24V-23mm
50mm (Luminous surface size)							
SEL-LS5470(F)		2500×54×70					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LE6935(F)		2500×69×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LR5535(A)		2500×95×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
SEL-LR5535(B)		2500×93×35					D8280-24V-34mm DY8280-24V-36mm D8560SWW-24V-34mm DY8560SWW-24V-36mm
70mm (Luminous surface size)							
SEL-LS7977		2500×79×77					D8420-24V-59mm DY8420-24V-62mm
SEL-LE9435		2500×94×35					D8420-24V-59mm DY8420-24V-62mm
>100mm (Luminous surface size)							
SEL-LS10570		2500×105×70					D8560-24V-85mm DY8560-24V-88mm
SEL-LS12335		2500×123×35					D8560-24V-85mm
φ60/90/120mm (Luminous surface size)							
SEL-LT60		2500×φ60					D8280-24V-20mm
SEL-LT90		2500×φ90					D8160-24V-15mm
SEL-LT120		2500×φ120					D8420-24V-59mm

Light Source for LLS2.0

Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m		LM/m(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Flexible light source														
SEL-D8160-24V-15mm		160	8/50 mm		24	10.5	9.5		1510 1280	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x15x1.5mm	5M/Roll	LT90
SEL-D8280-24V-15mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x15x1.5mm	2.5M/Roll	LS3360
SEL-D8280-24V-20mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x20x1.5mm	2.5M/Roll	LS4067/LE5535/LT60
SEL-D8280-24V-34mm		280	14/50 mm		24	27.5	25		3250 2750	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x34x1.5mm	2.5M/Roll	LS5470(F)/LE6935(F) LR5535(A)/LR5535(B)
SEL-D8420-24V-59mm		420	21/50 mm		24	33	30		3900 3300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x59x1.5mm	2.5M/Roll	LS7977 LE9435 LT120
SEL-D8560-24V-85mm		560	28/50 mm		24	44	40		5050 4300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	2500x85x1.5mm	2.5M/Roll	LS10570 LS12335
SEL-D8560SWW-24V-34mm		560	28/50 mm		24	27.5	25		2740	>80	2700 K 6000 K	2500x34x1.5mm	2.5M/Roll	LS5470(F)/LE6935(F) LR5535(A)/LR5535(B)

Light Source for LLS2.0


Model	Drawing	LEDs/m(pcs)	LEDs/cut	Entry Cable	DC(V)	Max.W/m	Typ.W/m		LM/m(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Rigid module														
SEL-DY8280-24V-17mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	249x17x5.6mm 299x17x5.6mm 499x17x5.6mm	20 pcs/Box 16 pcs/Box 20 pcs/Box	LS3360
SEL-DY8280-24V-23mm		280	14/50 mm		24	22	20		2700 2300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	249x23x5.6mm 299x23x5.6mm 499x23x5.6mm	20 pcs/Box 16 pcs/Box 20 pcs/Box	LS4067/LE5535/
SEL-DY8280-24V-36mm		280	14/50 mm		24	27.5	25		3250 2750	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x36x5.6mm 499x36x5.6mm	16 pcs/Box 20 pcs/Box	LS5470 (F)/LE6935 (F) LR5535 (A)/LR5535 (B)
SEL-DY8420-24V-62mm		420	21/50 mm		24	33	30		3900 3300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x62x5.6mm 499x62x5.6mm	8 pcs/Box 10 pcs/Box	LS7977 LE9435
SEL-DY8560-24V-88mm		560	28/50 mm		24	44	40		5050 4300	>80 >95	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	299x88x5.6mm 499x88x5.6mm	8 pcs/Box 10 pcs/Box	LS10570
SEL-DY8560SWW-24V-36mm		560	28/50 mm		24	27.5	25		2740	>80	2700 K 6000 K	499x36x5.6mm	20 pcs/Box	LS5470 (F)/LE6935 (F) LR5535 (A)/LR5535 (B)

Power Supply for LLS2.0


Model	Drawing	Size L×W×H(mm)	Input Voltage	Input Current	Output Voltage	Output Current	Output Power	Power Factor	Power Efficiency	Certification
DALI dimming driver										
SEL-BDD-V24-030S		377×21×19.5	100-277VAC 50/60Hz	0.38A Max	24VDC	1.25A Max	30W	>0.95	83%	CB/CE/SAA
SEL-BDD-V24-065S		346×30×23.5	100-277VAC 50/60Hz	0.8A Max	24VDC	2.7A Max	65W	>0.95	88%	CB/CE/SAA
SEL-BDD-V24-100S		373×39×27	100-277VAC 50/60Hz	1.15A Max	24VDC	4.2A Max	100W	>0.95	90%	CB/CE/SAA
3-In-1 dimming driver										
SEL-BSD-V24-030S		377×21×19.5	100~277VAC 50/60Hz	0.38A Max	24VDC	1.25A Max	30W	>0.95	83%	CB/CE/SAA
SEL-BSD-V24-065S		346×30×23.5	100~277VAC 50/60Hz	0.8A Max	24VDC	2.7A Max	65W	>0.95	88%	CB/CE/SAA
SEL-BSD-V24-100S		373×39×27	100~277VAC 50/60Hz	1.15A Max	24VDC	4.2A Max	100W	>0.95	90%	CB/CE/SAA
SEL-BSD-V48-065S		346X29.5X23.5	220~240VAC 50/60Hz	0.35A Max	48VDC	1.35A Max	65W	>0.9	86%	CE
SEL-BSD-V48-100S		346X29.5X23.5	220~240VAC 50/60Hz	0.52A Max	48VDC	2.1A Max	100W	>0.9	86%	CE
SEL-BSD-V48-150S		373X39X27	220~240VAC 50/60Hz	0.75A Max	48VDC	3.1A Max	150W	>0.9	91%	CE
SEL-BSD-V48-200S		373X39X27	220~240VAC 50/60Hz	0.98A Max	48VDC	4.15A Max	200W	>0.9	92%	CE
Non dimming driver										
SEL-FN-V24-030P		250×30×17	220~240VAC 50/60Hz	0.2A Max	24VDC	1.25A Max	30W	>0.95	86%	CB/CE
SEL-FN-V24-060P		312×30×18	220~240VAC 50/60Hz	0.35A Max	24VDC	2.5A Max	60W	>0.95	91%	CB/CE
SEL-FN-V24-100P		312×30×18	220~240VAC 50/60Hz	0.6A Max	24VDC	4.16A Max	100W	>0.95	92%	CB/CE

Highlight


LLS2.0 Upgrade

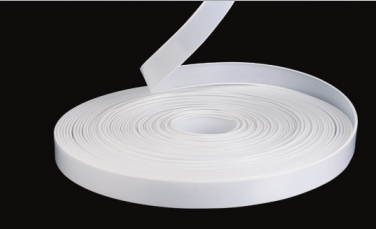


Flexible diffuser:
50M/roll, flexible diffuser, meet the requirement of different applications.

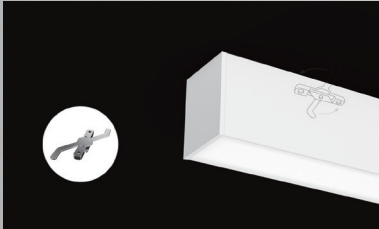


Surface mounting:
luminaire can fit the wall seamlessly, the installation and maintenance are easy and efficient.

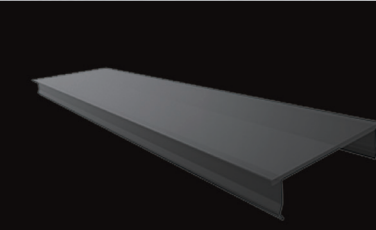


Black diffuser:
Integrated with architecture, provides lighting effect without seeing the luminaire.

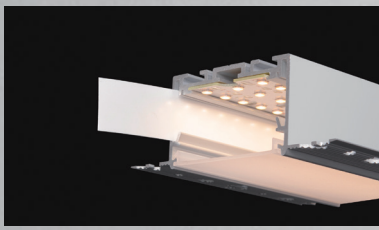


Luminous efficiency improved:
Reflective paper is attached on the flanks of the profile, which can optimize and improve the luminous efficiency, and meet higher lighting requirements.

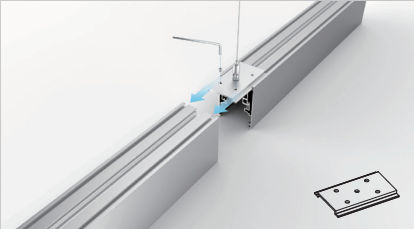


Interconnection of luminaire:
The brand-new interconnection accessory, interconnection of the luminaire without disassembly, convenient and efficient.

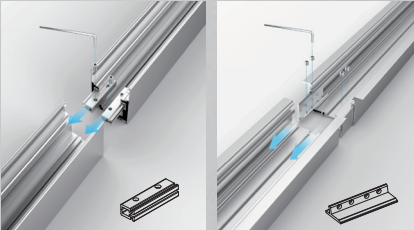


Interconnection of profile:
New-added interconnection accessory of profile, the screws can be turned from the front of profile, convenient and efficient.

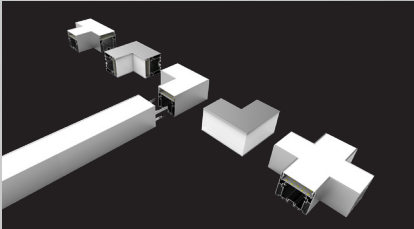


Connectors:
Multiple optional standard connectors, and any other special angle (L-shape, T-shape, X-shape and other angles) can be customized; seamless connection with appealing design.

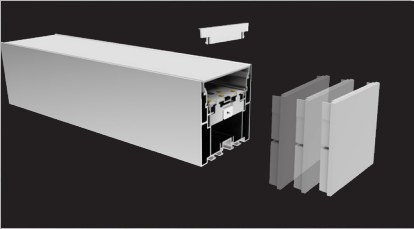

Magnetic End Cap:
Magnetic absorption design, connect in seconds; Minimalist and trendy appearance without screws.

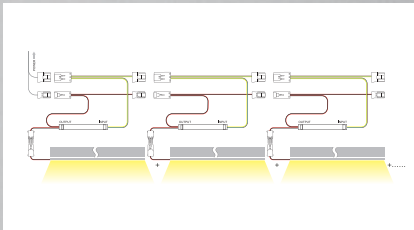


Integrated Track Cabling:
Integrated track cabling solution, save effort and time, includes dimming and non-dimming.

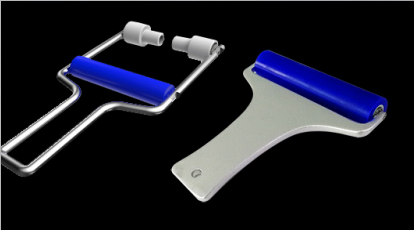


Professional Matching Tool:
Professional matching tool of diffuser installing, used for ultra-long application of pendant, surface mounted, save time and complete easily.

Linear Lighting Solution

Light source



Flexible strip



Rigid module



Tonning rigid module


Other Brands: TRIDONIC PHILIPS OSRAM

Installation

Wall mounted




Recessed without trim



Recessed with trim



Pendant




Surface mounted



Integrated track cabling



Beautiful overall effect

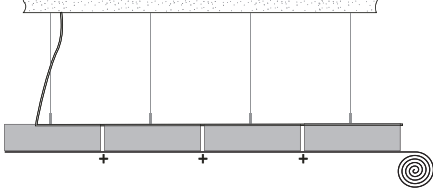


Quick connector



Convenient Connection

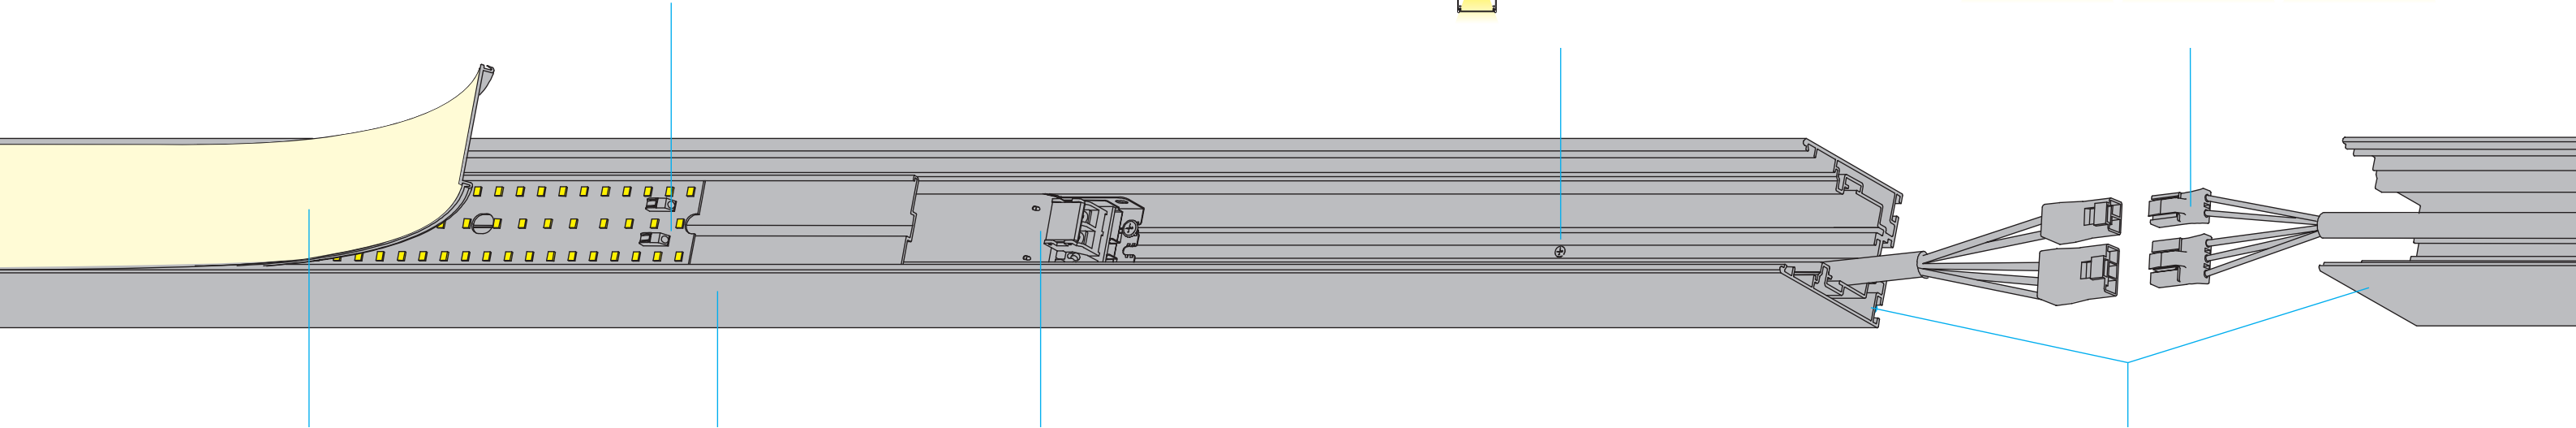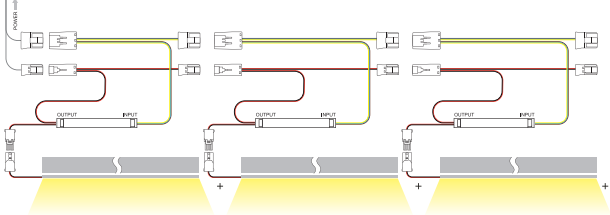

Diffuser




General diffuser
PC material/2.5M



Black diffuser
PC material/2.5M



Aluminium blind diffuser
AL6063/2.5M



Flexible diffuser
PC material/50M


Profile




LS series



LE series



LR series



LR series



LT series

Power supply



0-10V/PWM/Resistor dimming



DALI-dimming




Non-dimming

Other Brands: TRIDONIC PHILIPS OSRAM

Interconnection

Vertical connectors




7-typeN90ā 7-typeN120ā 7-typeN60ā

Horizontal connectors




X-typeN90ā X-typeN60ā+120ā Y-typeN120ā L-typeN90ā L-typeN60ā L-typeN120ā T-typeN60ā+120ā T-typeN90ā 180āExtender

Profile interconnection



EX-23 EX-17

Luminaire interconnection




EX-24

Customized corner



L90 L90N L90W T90 X90

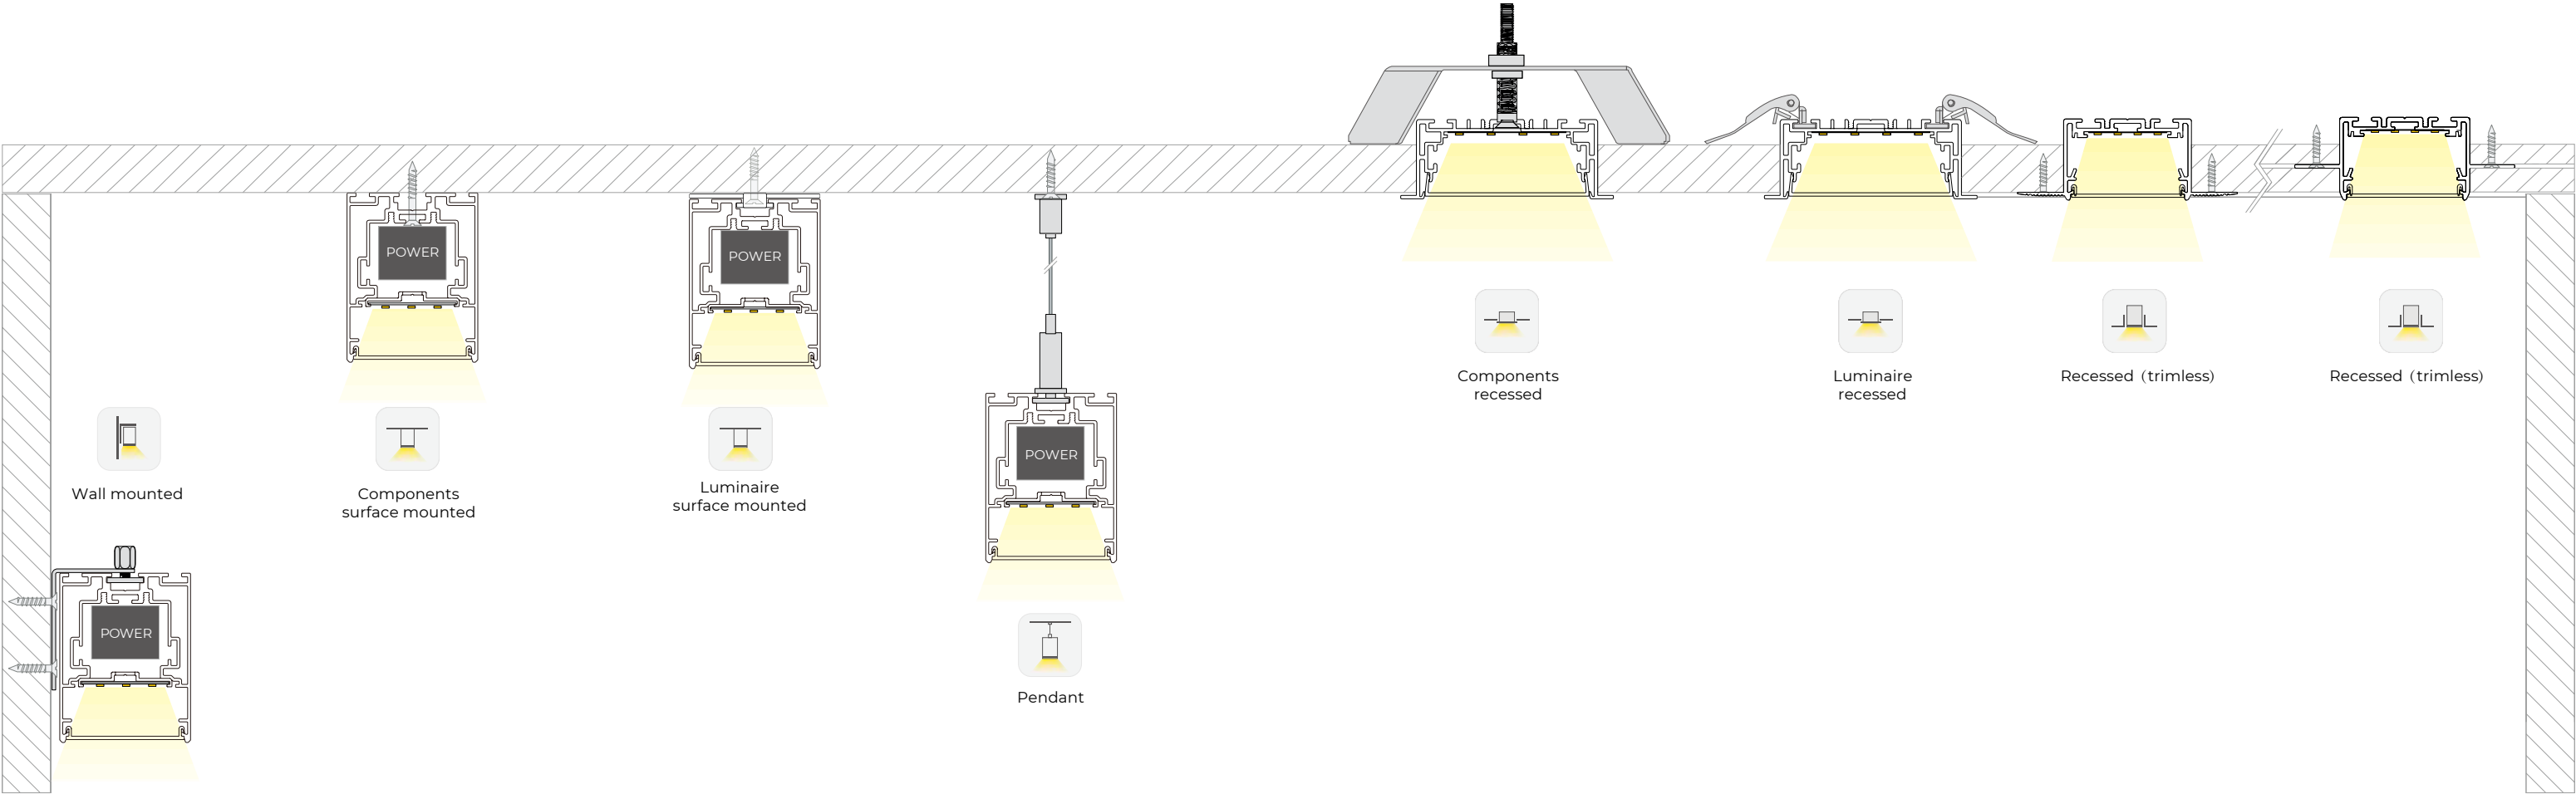


Stylish Lighting Application

Extension of Straight Line


Available for single luminaire use, in orderly Arrangement and ultra-long interconnection for limitless extension.



Single luminaire use, any size can be customized.

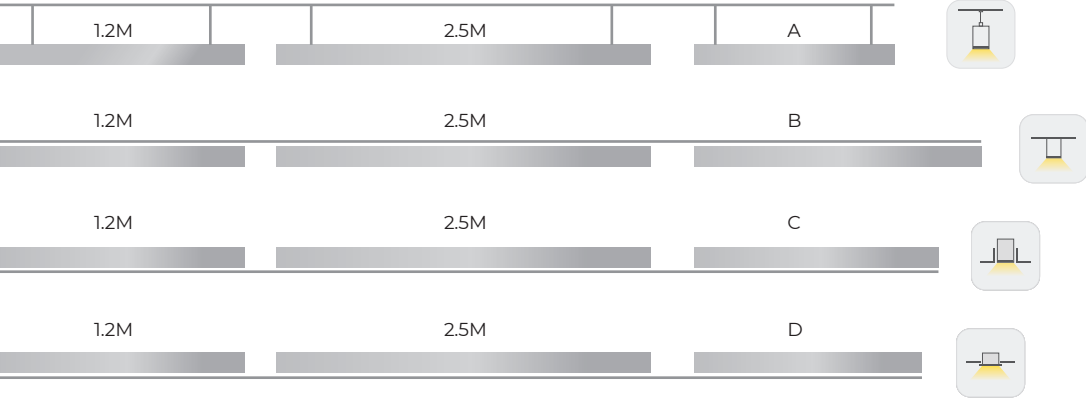


Ultra long interconnection, no light leakage with the 50m flexible diffuser.

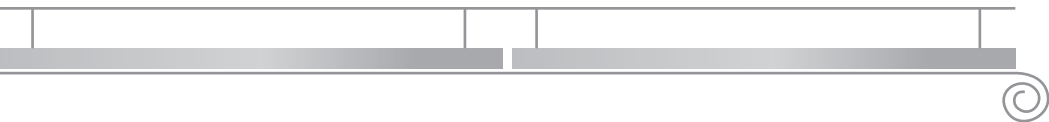

Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward.

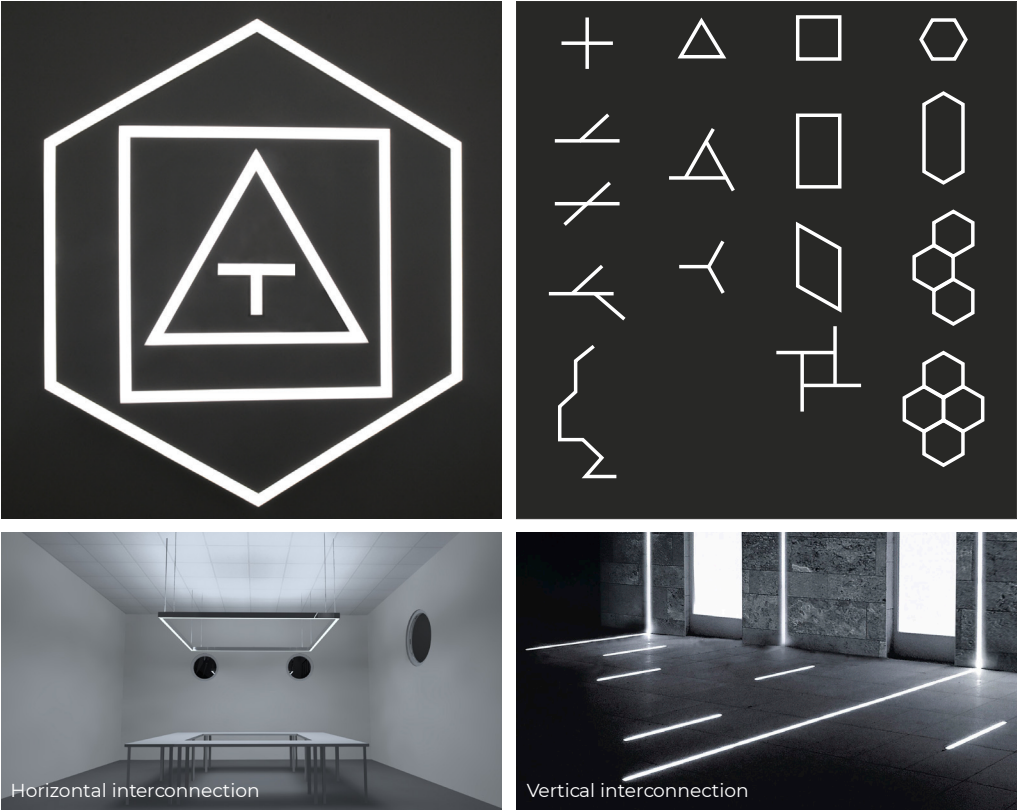


3D Style

Shuttle freely along the edge of ceiling& wall& floor




SEL-LS3360

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

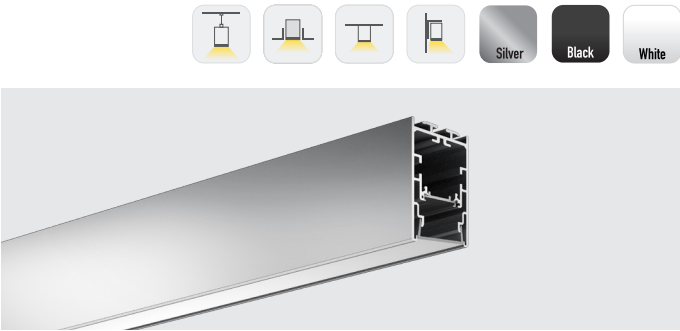

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%

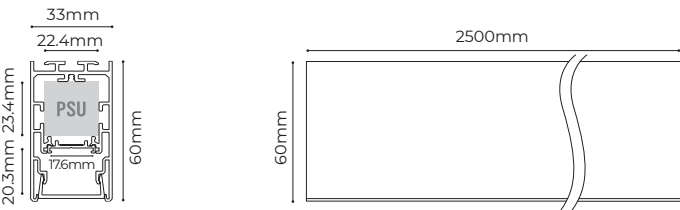


Profile Components



Profile & Carrier	L250 0Å W33Å H60mm	
Diffuser	L250 0Å W26.6Å H10.2mm	
End cap	EC-LS3360 L33Å W60Å H11.5mm	
Quick locker	BK-01 L22Å W14Å H13mm	

Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-15mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	2500Å 15Å 1.5mm	280LEDs	14 LEDs/50mm
Rigid modular							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-17mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	499Å 17Å 5.6mm	280LEDs	14 LEDs/50mm

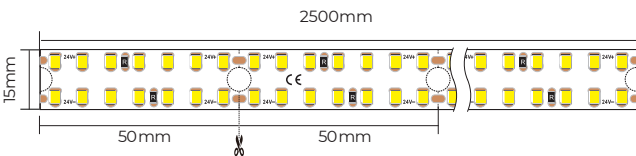

Temperature ambient: 25℃
LED strip: D8280-24V-15mm(20W/m)

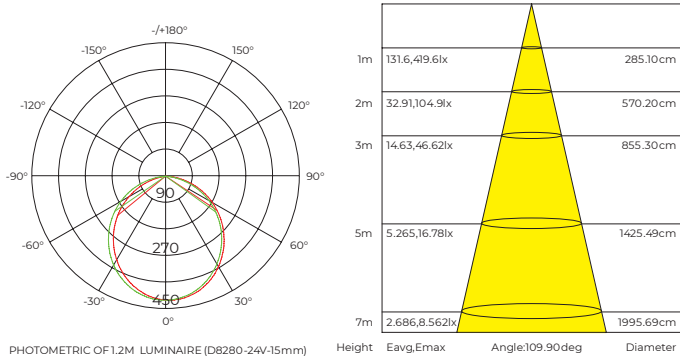

Installation Accessories

Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	
Recessed buckle	RE-01 89Å 25Å 75mm	
Wall-mounted buckle	WL-01 50Å 18Å 34mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-01	
Reflective paper	BG-13 15000Å 16Å 0.075mm	

Customizable interconnected corners

"L"-type	L90-LS3360 100Å 100Å 60mm	
"L"-type (inner)	L90N-LS3360 100Å 100Å 33mm	
"L"-type (exterior)	L90W-LS3360 100Å 100Å 33mm	
"T"-type	T90-LS3360 150Å 100Å 60mm	
"X"-type I	X90-LS3360 150Å 150Å 60mm	

Standard extenders

180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	377Å 21Å 19.5mm	24VDC	30W	
BDD-V24-030S	377Å 21Å 19.5mm	24VDC	30W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type											
LLS	-	Pendant mounted	LS	3360	Flat	F	Diffuser D	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C
																				2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
																				2700K	SW			Non dimming	N				
																				3000K	WW								
																				3500K	PW								
																				4000K	NW								
																				5000K	DW								
																				6000K	W								
LLS	-		LS	3360		F		D	F		S		S	2500	-		R	20		LW		8		D	-		D	B	C
LLS	-		LS	3360		F		D	F		S		S	2500	-										-		B		C

Ordering profile components SEL-LLS-LS3360FDFSS2500-BC




Ordering luminaires kits

SEL-LLS-LS3360FDFSS2500-R20LW8D-DC




SEL-LS4067

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted



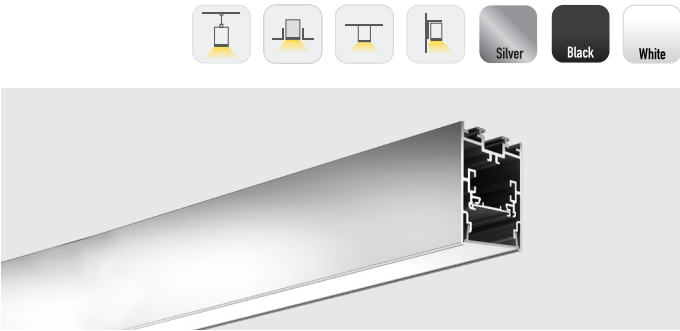


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%

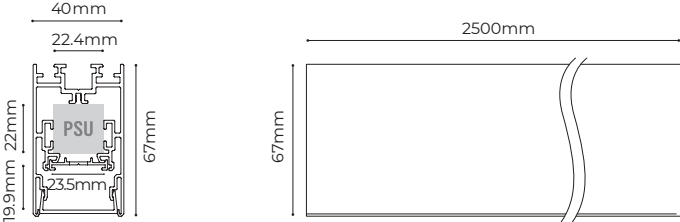

Profile Components	
Profile & Carrier	L2500 Å W40 Å H67mm 
Diffuser	L2500 Å W342 Å H10.2mm 
End cap	EC-LS4067 L40 Å W67 Å H11.5mm 
Quick locker	BK-01 L22 Å W14 Å H13mm 

Lighting Source	
Flexible Strip	
Model	CRI Lumens Voltage Typ.power Size LEDs/meter Cutting unit
D8280-24V-20mm	λ 80 2700LM/m 24V 20W/m 2500 Å 20 Å 1.5mm 280LEDs 14 LEDs/50mm
Rigid modular	
Model	CRI Lumens Voltage Typ.power Size LEDs/meter Cutting unit
DY8280-24V-23mm	λ 80 2700LM/m 24V 20W/m 499 Å 23 Å 5.6mm 280LEDs 14 LEDs/50mm

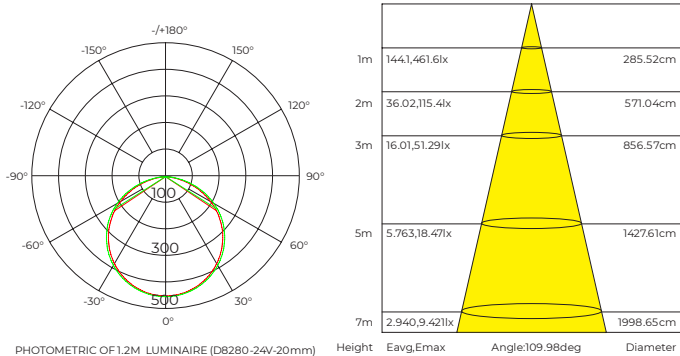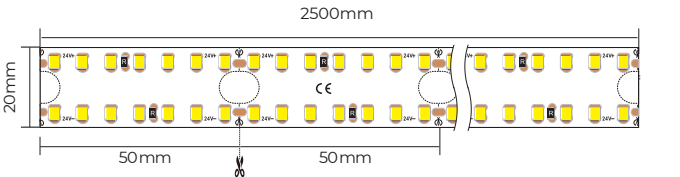

Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-02 96 Å 25 Å 79mm	
Wall-mounted buckle	WL-02 50 Å 16 Å 34mm	
Surface mounted buckle	CL-08 72 Å 54 Å 5.9mm	
Screw set	CL-01 M3.5 Å 40mm	
Cable clip	BG-01	
Reflective paper	BG-13 15000 Å 16 Å 0.075mm	

Customizable interconnected corners		
"L"-type	L90-LS4067 100 Å 100 Å 67mm	
"L"-type (inner)	L90N-LS4067 100 Å 100 Å 40mm	
"L"-type (exterior)	L90W-LS4067 150 Å 150 Å 40mm	
"T"-type	T90-LS4067 150 Å 100 Å 67mm	
"X"-type	X90-LS4067 150 Å 150 Å 67mm	



Standard extenders					
180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50 Å 10 Å 10mm				

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	377 Å 21 Å 19.5mm	24VDC	30W	
BDD-V24-030S	377 Å 21 Å 19.5mm	24VDC	30W	


Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Customizable corner
Can select power supply with lower power according to the actual power of luminaires

Ordering Code																																					
Category	-	Series	Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type								
LLS	-	Pendant mounted	LS	4067	Flat	F	Diffuser D	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C								
										White	W									24VDC Flexible strip	F	2300K	LW							>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
										Black	B																										
LLS	-		LS	4067		F		D	F	S		S	2500	-		R		20		LW		8		D	-		D		C								
LLS	-		LS	4067		F		D	F	S		S	2500	-										-		B		C									

Ordering profile components SEL- LLS-LS4067DFSS2500-BC Ordering luminaires kits SEL-LLS-LS4067DFSS2500-R20LW8D-0

SEL-LE5535

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

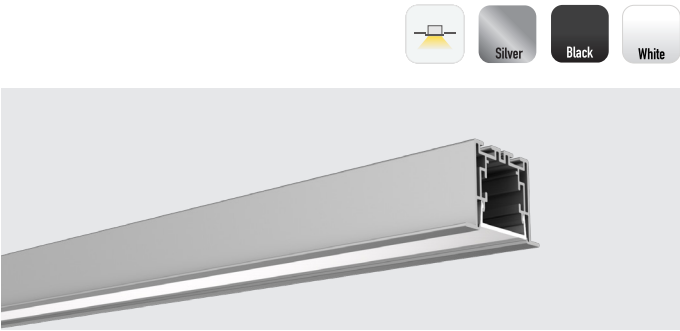


Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 33W/m
Transmittance	>85%


Profile Components

Profile	L2500Å W55Å H35mm	
Diffuser	L2500Å W342Å H10.2mm	
End cap	EC-LE5535 L55Å W35Å H18mm	


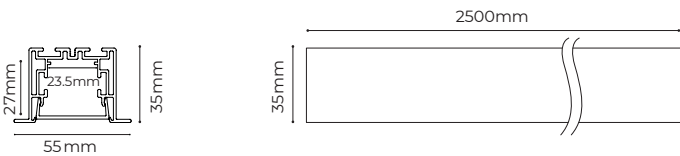


Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	2500Å 20Å 1.5mm	280LEDs	14 LEDs/50mm
DS8320-48V-20mm	λ 80 λ 90	3100LM/m	48V	20W/m	2500Å 20Å 1.5mm	320LEDs	16 LEDs/50mm
Rigid modular							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-23mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	499Å 23Å 5.6mm	280LEDs	14 LEDs/50mm

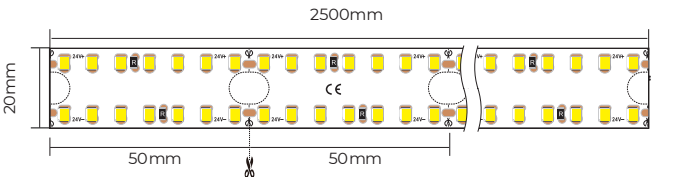

Temperature ambient: 25℃
LED strip: D8280-24V-20mm(20W/m)

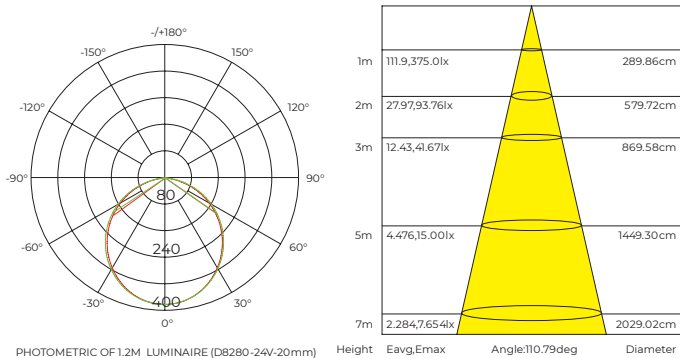

Installation Accessories

Recessed Accessories (N-shaped buckle)	RN-04 107.3Å 45Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	


Customizable interconnected corners

"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders

180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-060P	305Å 30Å 17mm	24VDC	60W	
BSD-V24-065S	346Å 30Å 23.5mm	48VDC	65W	
BSD-V24-100S	346Å 30Å 23.5mm	48VDC	100W	

- Parts of profile components can be purchased separately
- The luminous flux is the testing result of 4000K product
- Customizable corner
- Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Recessed with trim	LE	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	20W/m	20	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C		
											White	W																				
											Black	B																				
LLS	-		LE	5535		F	D		X	S		S	2500	-			R	20		LW		8		D	-		D		C			
LLS	-		LE	5535		F	D		X	S		S	2500	-										-		B						




Ordering profile components SEL-LLS-LE5535FDXSS2500-BC Ordering luminaires kits SEL-LLS-LE5535FDXSS2500-R20LW8D-DC

SEL-LS5470(F)



- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- 50m/roll flexible diffuser, PC diffuser, aluminium blind diffuser
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>75%

Profile Components ②	
Profile 1	L2500Å W54Å H70mm 
Diffuser 1	L2500Å W47.5Å H10mm 
Flexible diffuser	CV-LS5470FD50000(F) L50000Å W47.5Å H10mm 
Aluminium blind diffuser	CV-LS5470FB2500(F)-S L2500Å W47.5Å H10mm 
Black diffuser	CV-LS5470FC2500(F)-B L2500Å W47.5Å H10mm 
End cap 2	EC-LS5470(F) L54Å W70Å H11.5mm 
Quick locker 4	BK-02 L32Å W22Å H13mm 

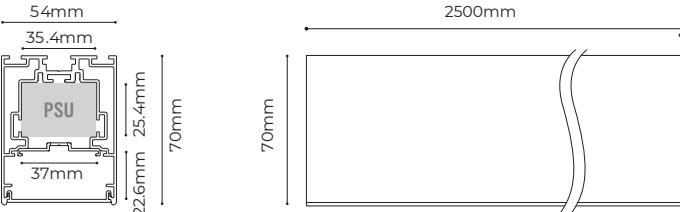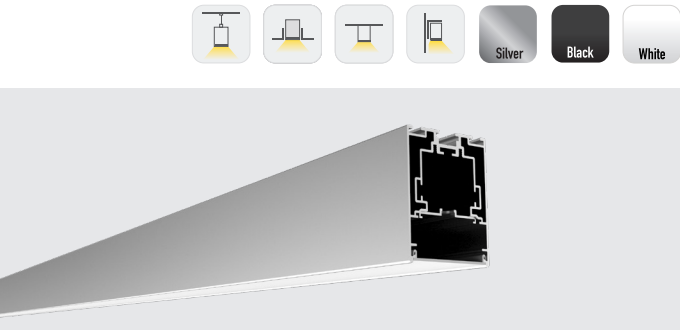

Lighting Source									
Flexible Strip									
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit		
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm		
D8560SWW-24V-34mm	λ 80	2740LM/m	24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm		
DS8320-48V-34mm	λ 80 λ 90	3500LM/m	48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm		
Rigid modular									
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit		
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	299Å 36Å 5.6mm 499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm		
DY8560SWW-24V-36mm	λ 80	2740LM/m	24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm		

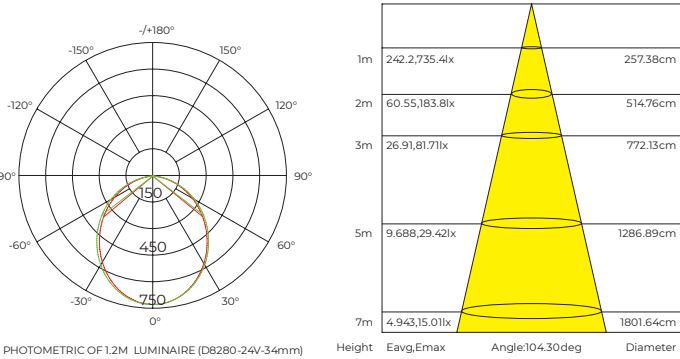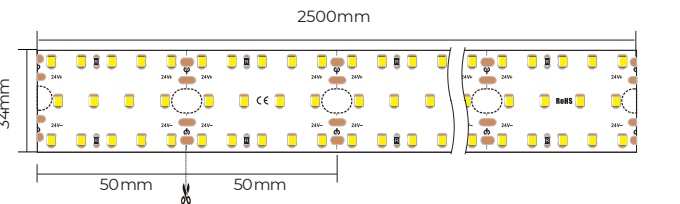

Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-03 110Å 25Å 82mm	
Surface mounted buckle	WL-02 50Å 18Å 34mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	CL-06 90.5Å 54Å 5.9mm	
Reflective paper	15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners ③		
"L"-type	L90-LS5470(F) 100Å 100Å 70mm	
"L"-type (inner)	L90N-LS5470(F) 100Å 100Å 54mm	
"L"-type (exterior)	L90W-LS5470(F) 150Å 150Å 54mm	
"T"-type	T90-LS5470(F) 150Å 100Å 70mm	
"X"-type	X90-LS5470(F) 150Å 150Å 70mm	



Standard extenders				
180° extender	EX-E1		"Y"-type (120°)	EX-E9 
"T"-type (90°)	EX-E4		"T"-type (60°-120°)	EX-E12 
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2 
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5 
"X"-type (60°-120°)	EX-E11		"7"-type (60°)	EX-E7 
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6 
Splice bar	EX-23 50Å 10Å 10mm		Whole lamp splice 80Å 50Å 6mm	EX-24 

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

② Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
⑤ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Recessed with trim	LS 5470	Flat	F	Diffuser	D	Flat	F	Silver	S	Holeless end cap	S	2500mm	N FE	-	24VDC Rigid module	R	25W/m	25	1900K	CW	>80	B	3-in-1 Dimming	D	SEL Whole SEL Individual	B	SEL	C	
										White	W						24VDC Flexible strip	F			2300K	LW	>95	H	DALI Dimming	A		D	Customized	S	
										Black	B														Non dimming	N					
LLS	-		LS 5470		F		D		F		S			S 2500	(F)	-		R		25					8		D	-		D	C
LLS	-		LS 5470		F		D		F		S			S 2500	(F)	-												-		B	

Ordering profile components SEL-LLS-LS5470FDFSS2500(F)-BC



Ordering luminaires kits SEL-LLS-LS5470FDFSS2500(F)-R25LW8D-10

SEL-LE6935(F)

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>85%

Profile Components ②	
Profile 1	L2500Å W69Å H35mm 
Diffuser 1	475Å 10Å 2500mm 
Flexible diffuser	CV-LE6935FD50000(F) L50000Å W475Å H10mm 
Aluminium blind diffuser	CV-LE6935FB2500(F)-S L2500Å W475Å H10mm 
Black diffuser	CV-LE6935FC2500(F)-B L2500Å W475Å H10mm 
End cap 2	EC-LE6935(F) L69Å W35Å H22mm 

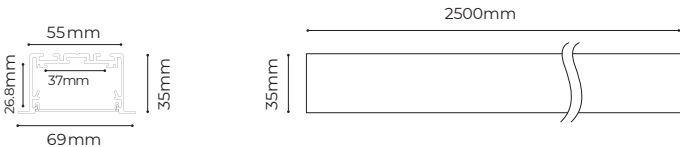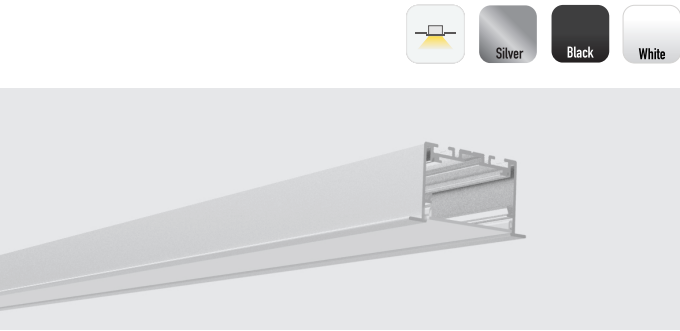




Lighting Source

Flexible Strip


Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m		24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	λ 80	2740LM/m		24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm
DS8320-48V-34mm	λ 80 λ 90	3500LM/m		48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm

Rigid modular

Model	CRI	Lumens	Ū	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m		24V	25W/m	499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80	2740LM/m		24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm

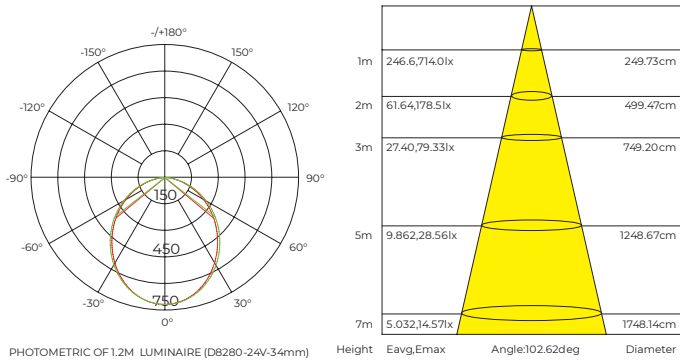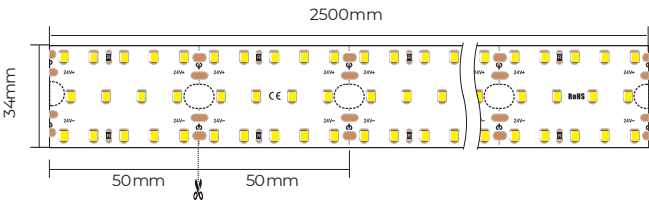

Installation Accessories		
Recessed Accessories (N-shaped buckle)	RN-05 99.8Å 59Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	
Integrated track cabling accessories	CM-XX	

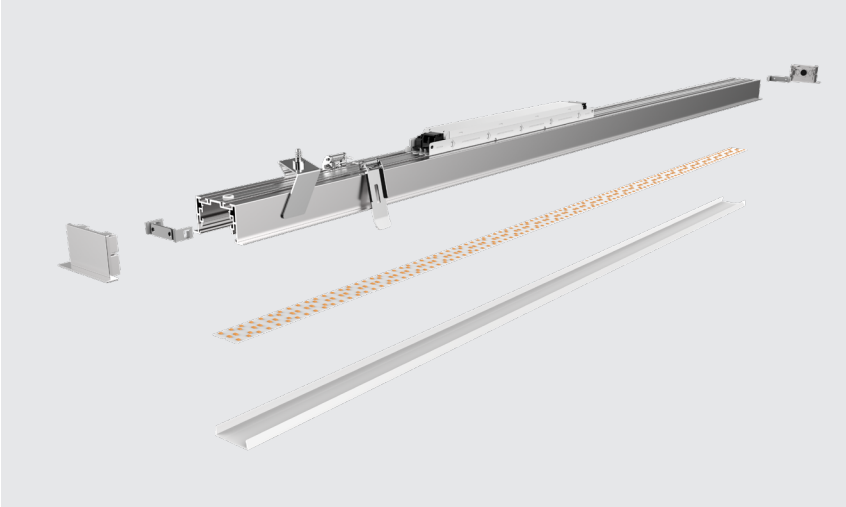

Customizable interconnected corners ③		
"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

② Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
⑤ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Recessed with trim	LS	6935	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	N	FE	-	24VDC Rigid module	R	25W/m	25	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	SEL	C	
																							2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
																							2700K	SW			Non dimming	N				
																							3000K	WW								
																							3500K	PW								
																							4000K	NW								
																							5000K	DW								
																							6000K	W								
LLS	-		LS	6935	F	D	X	S	S	2500	(F)	-	R	25		LW	8	D	-	D	C											
LLS	-		LS	6935	F	D	X	S	S	2500	(F)	-						-	B	C												



Ordering profile components SEL-LLS-LE6935FDXSS2500(F)-BC
Ordering luminaires kits SEL-LLS-LE6935FDXSS2500-R25LW8D(F)-DC

SEL-LR5535(A)



- Several optional diffuser: general PC diffuser, flexible PC diffuser, black diffuser, aluminium blind diffuser
- 50mm large luminous surface, trimless recessed design,integrated into architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profile with high-quality surface treatment, black, white and silver are optional
- Multiple optional connectors:180° direct connection, L type, T type, X type

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>86%


Profile Components ⑥	
Profile 1	L2500Å W95Å H35mm 
Diffuser 1	L2500Å W47.5Å H10mm 
Flexible diffuser	CV-LR5535FD50000(A) L50000Å W47.5Å H10mm 
Aluminium blind diffuser	CV-LR5535FB2500(A)-S L2500Å W47.5Å H10mm 
Black diffuser	CV-LR5535FC2500(A)-B L2500Å W47.5Å H10mm 
End cap 2	EC-LR5535(A) L55Å W35Å H22mm 

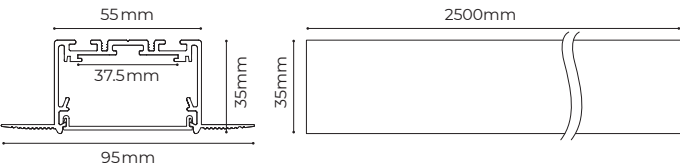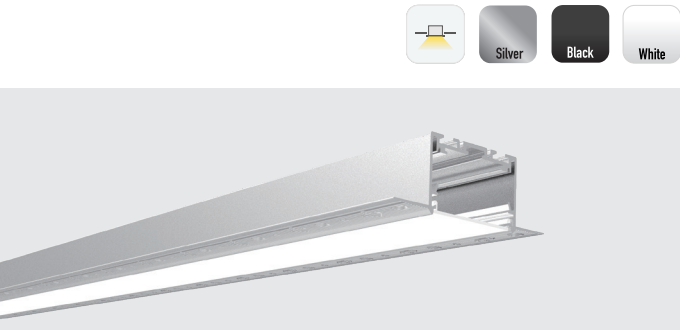

Lighting Source							
Flexible Strip 							
Model	CRI	Lumens 	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	λ 80	2740LM/m	24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm
DS8320-48V-34mm	λ 80 λ 90	3500LM/m	48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm
Rigid modular 							
Model	CRI	Lumens 	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80	2740LM/m	24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm

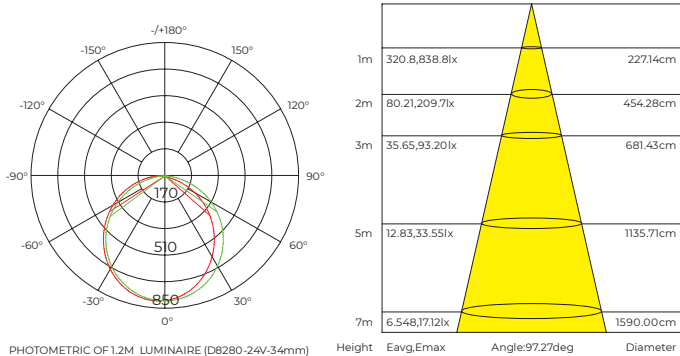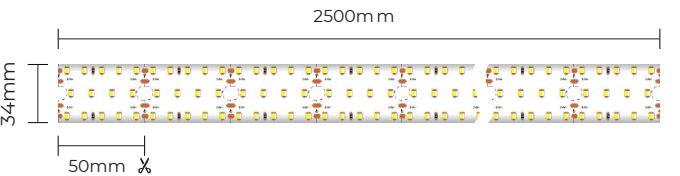

Installation Accessories		
Install screw	CL-01 3.5Å 30mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	

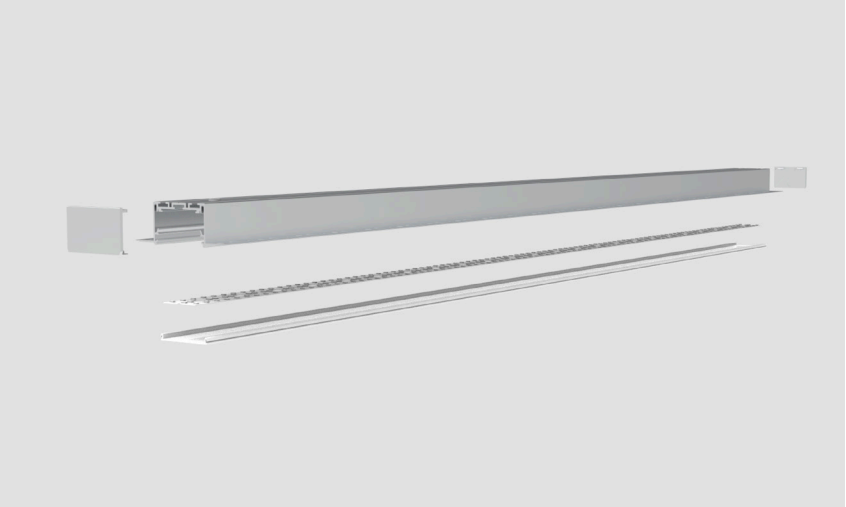

Customizable interconnected corners ③		
"L"-type	L90 -LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N -LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W -LE5535 100Å 100Å 55mm	
"T"-type	T90 -LE5535 150Å 107Å 35mm	
"X"-type	X90 -LE5535 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

⑥ Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
④ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Package	Label Type								
LLS	-	Trimless Recessed	LR	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	(A)	-	SEL Whole	B	SEL	C
							No diffuser	X			White	W						SEL Individual	D	Customized	S
							Black	B													
LLS	-		LR	5535		F		D		X		S		S	2500	(A)	-		B		C



Ordering profile components SEL-LLS-LR5535FDXSS2500(A)-BC

SEL-LR5535(B)

- Several optional diffuser: general PC diffuser, flexible PC diffuser, black diffuser, aluminium blind diffuser
- 50mm large luminous surface, trimless recessed design,integrated into architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profile with high-quality surface treatment, black, white and silver are optional
- Multiple optional connectors:180° direct connection, L type, T type, X type

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 38W/m
Transmittance	>86%

Profile Components ②		
Profile 1	L2500Å W93Å H35mm	
Diffuser 1	L2500Å W475Å H10mm	
Flexible diffuser	CV-LR5535FD50000(B) L50000Å W475Å H10mm	
Aluminium blind diffuser	CV-LR5535FB2500(B)-S L2500Å W475Å H10mm	
Black diffuser	CV-LR5535FC2500(B)-B L2500Å W475Å H10mm	
End cap 2	EC-LR5535(B) L55Å W35Å H22mm	

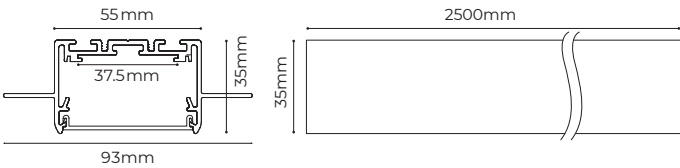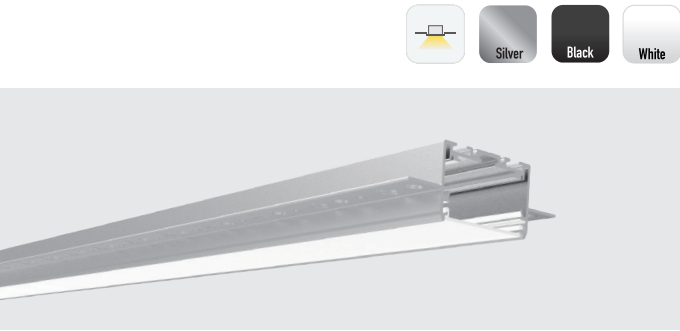



Lighting Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	2500Å 34Å 1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	λ 80	2740LM/m	24V	25W/m	2500Å 34Å 1.5mm	560LEDs	28LEDs/50mm
DS8320-48V-34mm	λ 80 λ 90	3500LM/m	48V	25W/m	2500Å 34Å 1.5mm	320LEDs	16LEDs/50mm

Rigid modular

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-36mm	λ 80 λ 95	3250LM/m 2760LM/m	24V	25W/m	499Å 36Å 5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	λ 80	2740LM/m	24V	25W/m	499Å 36Å 5.6mm	560LEDs	28LEDs/50mm

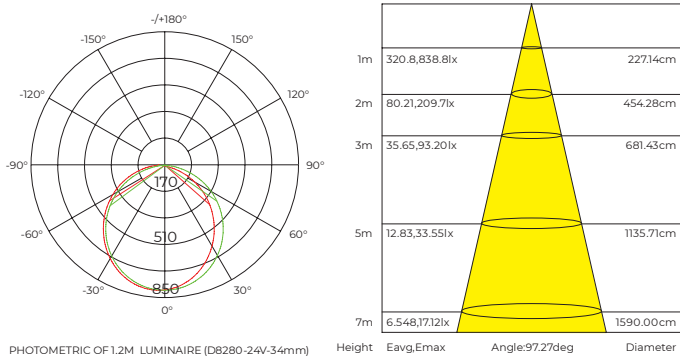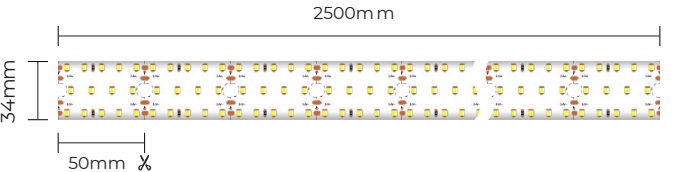

Installation Accessories		
Install screw	CL-01 3.5Å 30mm	
Reflective paper	BG-14 15000Å 19Å 0.188mm	

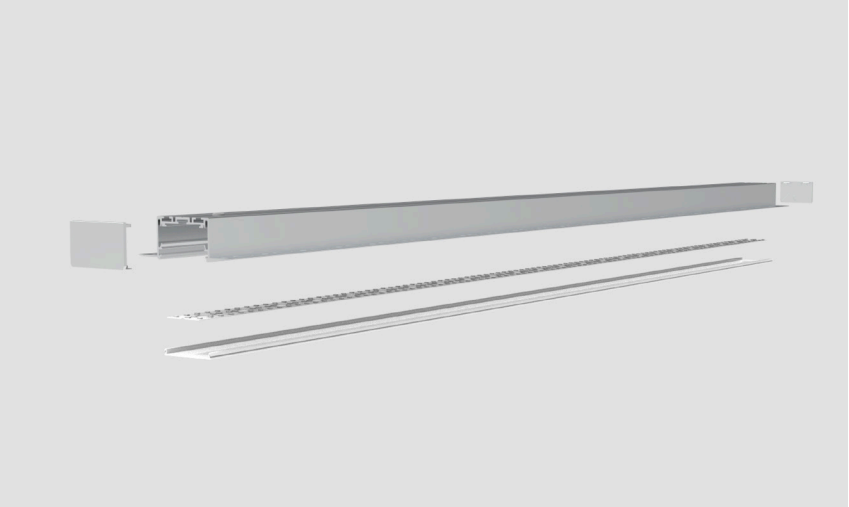

Customizable interconnected corners ③		
"L"-type	L90-LR5535(B) 107Å 107Å 35mm	
"L"-type (inner)	L90N-LR5535(B) 100Å 100Å 69mm	
"L"-type (exterior)	L90W-LR5535(B) 100Å 100Å 69mm	
"T"-type	T90-LR5535(B) 150Å 107Å 35mm	
"X"-type	X90-LR5535(B) 150Å 150Å 35mm	

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°-120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°-120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-17 50Å 9Å 22.5mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BDD-V24-065S	346Å 30Å 23.5mm	24VDC	65W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-065S	346X29.5X23.5mm	48VDC	65W	
BSD-V48-100S	346X29.5X23.5mm	48VDC	100W	

② Parts of profile components can be purchased separately
ȳ The luminous flux is the testing result of 4000K product
③ Customizable corner
④ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Package	Label Type								
LLS	-	Trimless Recessed	LR	5535	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	(B)	-	SEL Whole	B	SEL	C
							No diffuser	X			White	W						SEL Individual	D	Customized	S
							Black	B													
LLS	-		LR	5535		F		D		X		S		S	2500	(B)	-		B		C



Ordering profile components SEL-LLS-LR5535FDXSS2500(B)-BC

SEL-LS7977


- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 42W/m
Transmittance	>85%



Profile Components ⑥		
Profile & Carrier 1	L2500Å W79Å H77mm	
Diffuser 1	L2500Å W72.3Å H10mm	
End cap 2	EC-LS7977 L79Å W77Å H11.5mm	
Quick locker 4	BK-03 L48.5Å W22Å H9mm	

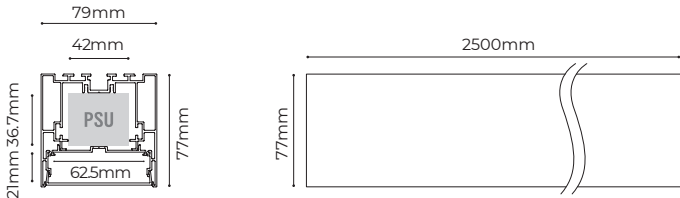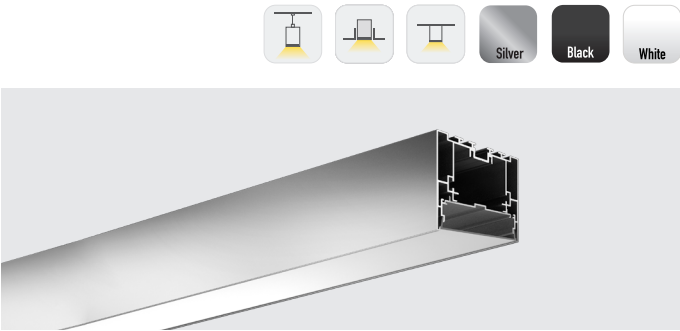

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	U	Voltage	Typ.power	Size	LEDs/meter Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900 LM/m	3310 LM/m	24V	30W/m	2500Å 59Å 1.5mm	420 LEDs 21 LEDs/50mm
DS8480-48V-59mm	λ 80 λ 90	4600 LM/m	48V	30W/m	2500Å 59Å 1.5mm	480 LEDs	16 LEDs/33.3mm
Rigid modular							
Model	CRI	Lumens	U	Voltage	Typ.power	Size	LEDs/meter Cutting unit
DY8280-24V-62mm	λ 80 λ 95	3900 LM/m	3310 LM/m	24V	30W/m	499Å 62Å 5.6mm	420 LEDs 21 LEDs/50mm

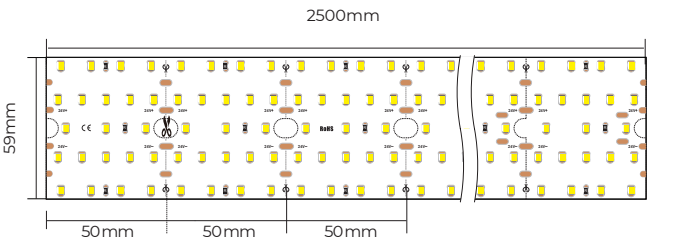

Temperature ambient: 25℃
LED strip: D8420-24V-59mm(30W/m)

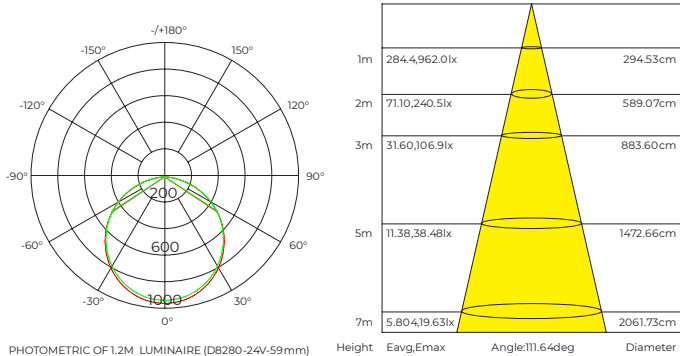

Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-04 135.4Å 25Å 90mm	
Surface mounted buckle	CL-09 126Å 54Å 5.9mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners ③		
"L"-type	L90-LS7977 150Å 150Å 77mm	
"L"-type (inner)	L90N-LS7977 150Å 150Å 79mm	
"L"-type (exterior)	L90W-LS7977 150Å 150Å 79mm	
"T"-type	T90-LS7977 200Å 150Å 77mm	
"X"-type	X90-LS7977 200Å 200Å 77mm	



Standard extenders					
180° extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type (60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type (60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

⑥ Parts of profile components can be purchased separately
③ The luminous flux is the testing result of 4000K product
④ Customizable corner
⑤ Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type									
LLS	-	Pendant mounted	LS 7977	Flat	F	Diffuser D	Flat F	Silver S	White W	Black B	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	30W/m 30	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C
																		2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
																		2700K	SW			Non dimming	N				
																		3000K	WW								
																		3500K	PW								
																		4000K	NW								
																		5000K	DW								
																		6000K	W								
LLS	-		LS 7977		F	D	F	S		S 2500	-				R	30		LW		8		D -		D		C	
LLS	-		LS 7977		F	D	F	S		S 2500	-											-		B		C	

Ordering profile components SEL-LLS-LS7977FDFSS2500-BC



Ordering luminaires kits

SEL-LLS-LS7977FDFSS2500-R30LW8D-10



SEL-LE9435


- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%




Profile Components

Profile 1	L2500Å W94Å H35mm	
Diffuser 1	L2500Å W72Å H10mm	
End cap 2	EC-LE9435 L94Å W35Å H18mm	

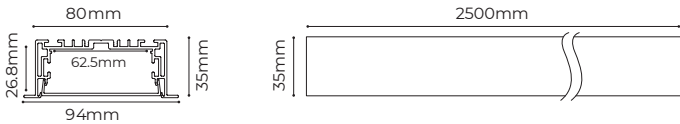


Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900LM/m 3310LM/m	24V	30W/m	2500Å 59Å 1.5mm	420LEDs	21 LEDs/50mm
DS8480-48V-59mm	λ 80 λ 90	4600LM/m	48V	30W/m	2500Å 59Å 1.5mm	480LEDs	16 LEDs/33.3mm
Rigid modular							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280-24V-62mm	λ 80 λ 95	3900LM/m 3310LM/m	24V	30W/m	499Å 62Å 5.6mm	420LEDs	21 LEDs/50mm

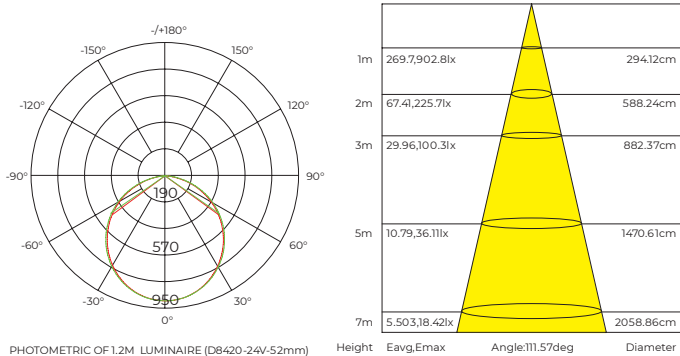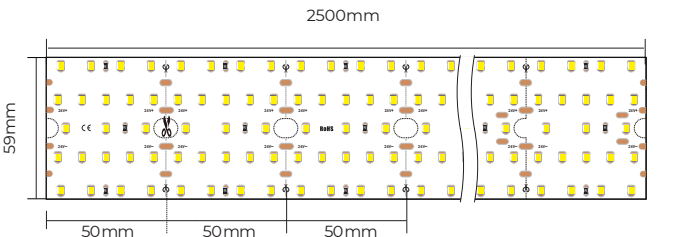

Installation Accessories		
Recessed Accessories (N-shaped buckle)	RN-06 96Å 84Å 39.5mm	
Recessed Accessories (butterfly clip)	RB-02 68.5Å 35Å 31.6mm	
Cable clip	BG-03	
Reflective paper	BG-12 15000Å 11.5Å 0.075mm	
Integrated track cabling accessories	CM-XX	

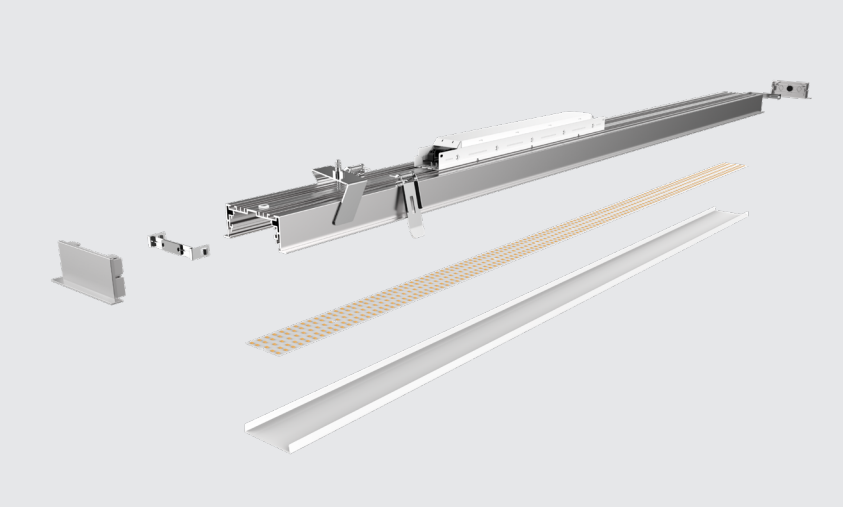

Customizable interconnected corners

"L"-type	L90-LE5535 107Å 107Å 35mm	
"L"-type(inner)	L90N-LE5535 100Å 100Å 55mm	
"L"-type (exterior)	L90W-LE5535 100Å 100Å 55mm	
"T"-type	T90-LE5535 150Å 107Å 35mm	
"X"-type	X90-LE5535 150Å 150Å 35mm	

Standard extenders

180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

- Parts of profile components can be purchased separately
- The luminous flux is the testing result of 4000K product
- Customizable corner
- Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type											
LLS	-	Recessed with trim	LE 9435	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	30W/m 30	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C	
										White	W					24VDC Flexible strip	F		2300K	LW	>90	9		A			D	Customized	S
										Black	B								2700K	SW	N								
																			3000K	WW									
																			3500K	PW									
																			4000K	NW									
																			5000K	DW									
																			6000K	W									
LLS	-		LE 9435	F	D	X	S		S 2500	-		R	30	LW	8		D -		D	C									
LLS	-		LE 9435	F	D	X	S		S 2500	-								-		B	C								



Ordering profile components SEL-LLS-LE9435FDXSS2500-BC Ordering luminaires kits SEL-LLS-LE9435FDXSS2500-R30LW8D-DC

SEL-LS10570




- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%

Profile Components ⑥		
Profile & Carrier ①	L250 0Å W105Å H70mm	
Diffuser ①	L250 0Å W97.7Å H10mm	
End cap ②	EC-LS10570 L105Å W70Å H11.5mm	
Quick locker ④	BK-03 L32Å W48Å H13mm	

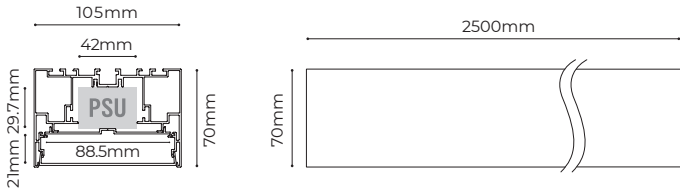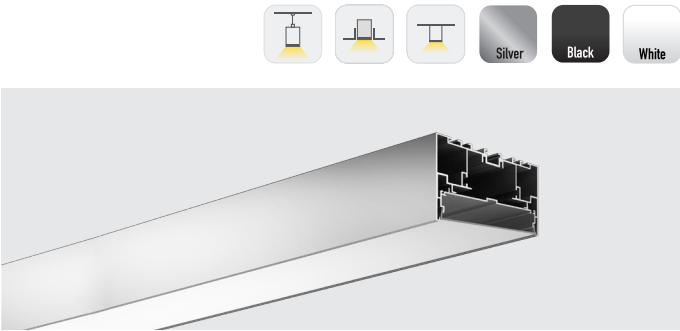


Lighting Source								
Flexible Strip								
Model	CRI	Lumens ȳ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
D8560-24V-85mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	2500Å 85Å 1.5mm	560LEDs	28LEDs/50mm	
DS8640-48V-85mm	λ 80 λ 90	6200LM/m	48V	40W/m	2500Å 85Å 1.5mm	640LEDs	32LEDs/50mm	
Rigid modular								
Model	CRI	Lumens ȳ	Voltage	Typ.power	Size	LEDs/meter	Cutting unit	
DY8560-24V-88mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	499Å 88Å 5.6mm	560LEDs	28LEDs/50mm	

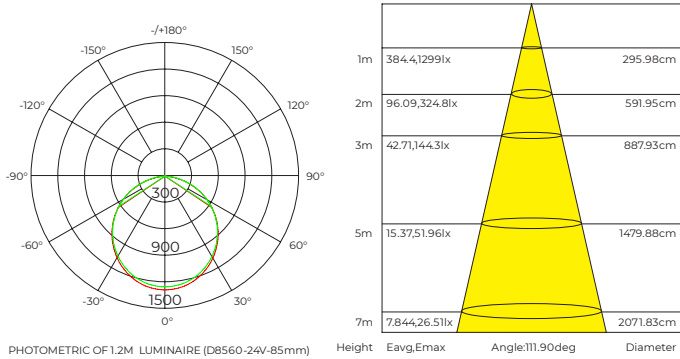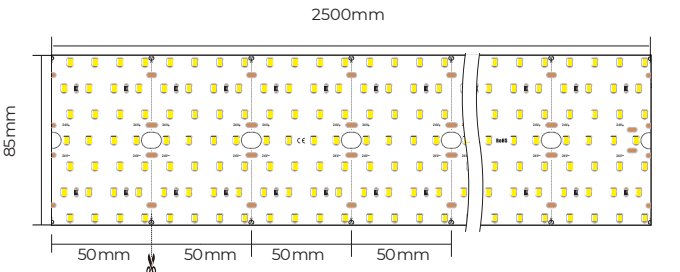


Installation Accessories		
Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Recessed buckle	RE-05 161.4Å 25Å 83mm	
Surface mounted buckle	CL-10 163Å 54Å 5.9mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-02	
Reflective paper	BG-13 15000Å 16Å 0.075mm	
Integrated track cabling accessories	CM-XX	

Customizable interconnected corners ③		
"L"-type	L90-LS10570 150Å 150Å 70mm	
"L"-type (inner)	L90N-LS10570 150Å 150Å 105mm	
"L"-type (exterior)	L90W-LS10570 150Å 150Å 105mm	
"T"-type	T90-LS10570 200Å 150Å 70mm	
"X"-type	X90-LS10570 200Å 200Å 70mm	

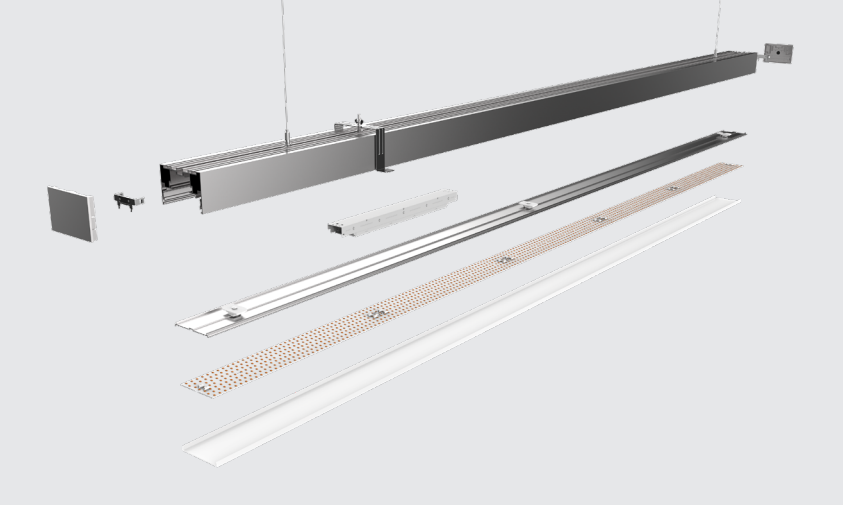

Standard extenders					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splice bar	EX-23 50Å 10Å 10mm				

Power Supply ④				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	


⑥ Parts of profile components can be purchased separately
ȳ The luminous flux is the testing result of 4000K product
③ Customizable corner
ȳ Can select power supply with lower power according to the actual power of luminaires

Ordering Code																													
Category	-	Series	Section Size	Diffuser Shape		Diffuser Nature		Carrier Style	Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Pendant mounted	LS	10570	Flat	F	Diffuser D	Flat	F	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	40W/m	40	1900K	CW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C
										White	W																		
										Black	B																		
LLS	-		LS	10570		F		D	F	S		S	2500	-		R	40		LW		8		D	-		D		C	
LLS	-		LS	10570		F		D	F	S		S	2500	-									-		B				


Ordering profile components SEL-LLS-LS10570FDFSS2500-BC Ordering luminaires kits SEL-LLS-LS10570FDFSS2500-R40LW8D-DC

SEL-LS12335

- 120mm large luminous surface, high brightness output
- PC diffuser imported from Germany, producing homogenous & softlighting
- Luminaires interconnection can be realized, convenient installation
- Various installation ways: pendant, and surface mounted

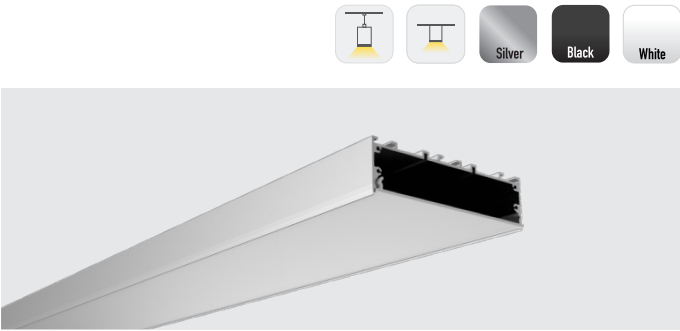




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 50W/m
Transmittance	>85%




Profile Components	
Profile & Carrier 1	L2500Å W123Å H35mm
Diffuser 1	L2500Å W120XH9.2mm

End cap 2	EC-LS12335 L123XW35XH2.5mm
-----------	-------------------------------

Lighting Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8560-24V-85mm	λ 80 λ 95	5050LM/m 4290LM/m	24V	40W/m	2500Å 85Å 1.5mm	560LEDs	28LEDs/50mm
D58640-48V-85mm	λ 80 λ 90	6200LM/m	48V	40W/m	2500Å 85Å 1.5mm	640LEDs	32LEDs/50mm

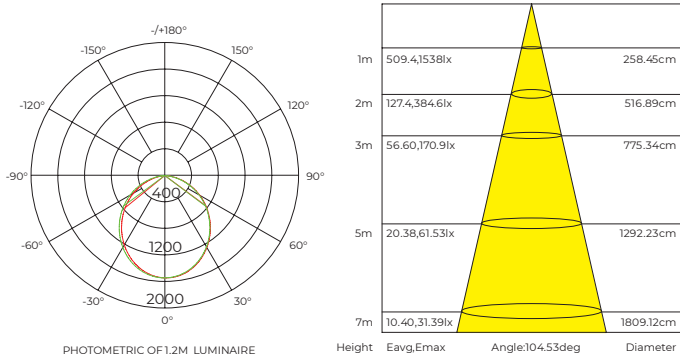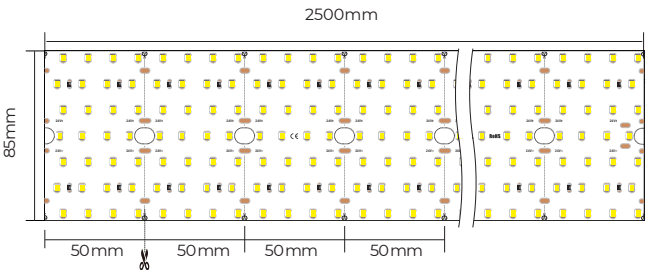

Installation Accessories		
Pendant cable (with junction box)	PY-FSXX 2m/4m	
Pendant cable	PN-FXX 2m/4m	
Surface mounted buckle	CL-07 189Å 54Å 5.7mm	
Screw set	CL-01 M3.5Å 40mm	
Cable clip	BG-03	

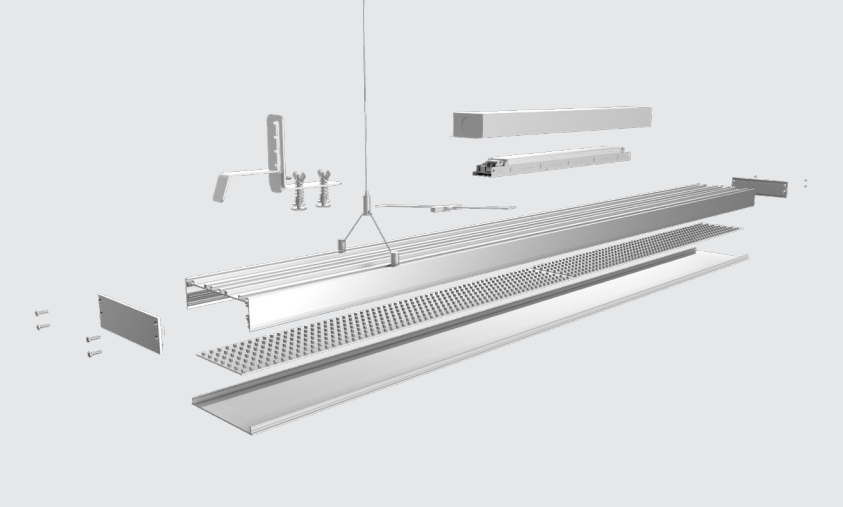

Standard extenders	
180Å extender	EX-16 50X118.3x6.2mm

Power Supply				
Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

ø Parts of profile components can be purchased separately
Ű The luminous flux is the testing result of 4000K product
Ű Can select power supply with lower power according to the actual power of luminaires


Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Pendant mounted	LS	12335	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Rigid module	R	40W/m	40	1900K	GW	>80	8	3-in-1 Dimming DALI Dimming Non dimming	D	SEL Whole SEL Individual	B	SEL	C
											White	W																		
											Black	B																		
LLS	-		LS	12335		F		D		X	S		S	2500	-		R		40		LW		8		D	-		D		C
LLS	-		LS	12335		F		D		X	S		S	2500	-										-		B		C	

Ordering profile components SEL-LLS-LS12335FDXSS2500-BC Ordering luminaires kits SEL-LLS-LS12335FDXSS2500-F40LW8D-DC


SEL-LT60

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

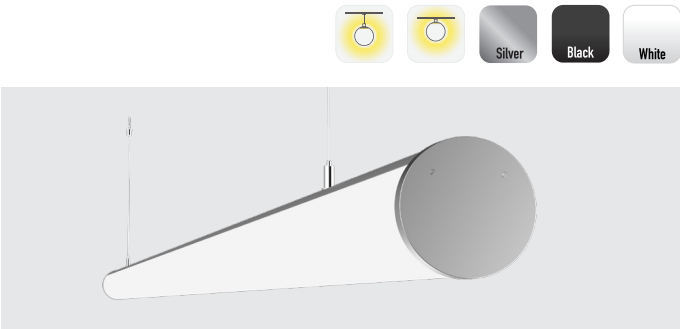

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 25W/m
Transmittance	>85%


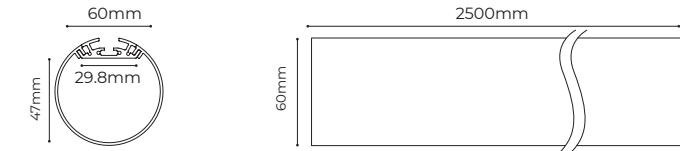


Profile Components

Profile X1	PR-LT60 2500mm	
Diffuser 1	CV-LT60 60x2500mm	
End cap 2	EC-LT60 63.4x8mm	


Lighting Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	λ 80 λ 95	2700LM/m 2290LM/m	24V	20W/m	2500x20x1.5mm	280LEDs	14 LEDs/50mm
DS8320-48V-20mm	λ 80 λ 90	3100LM/m	48V	20W/m	2500x20x1.5mm	320LEDs	16 LEDs/50mm

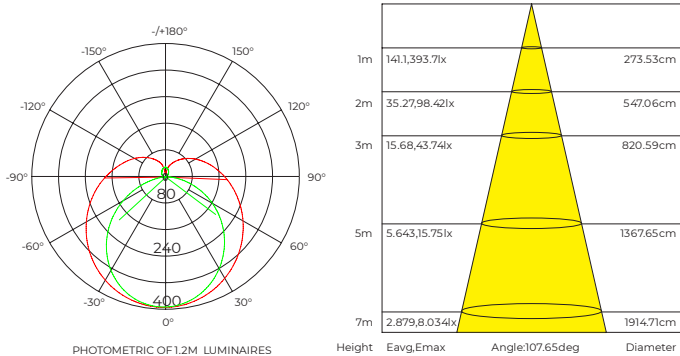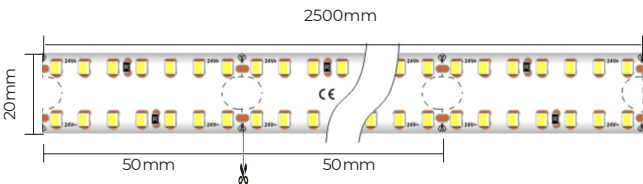

Installation Accessories


Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	

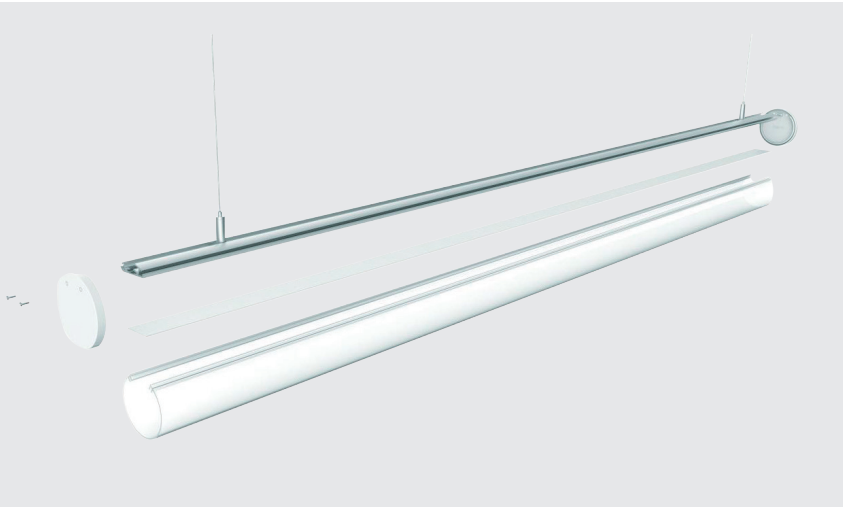

Standard extenders

180° extender	EX-09 13.3x2.65x1000mm	
---------------	---------------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-065S	346x30x23.5mm	24VDC	65W	
BDD-V24-065S	346x30x23.5mm	24VDC	65W	
BN-V24-060P	305x30x17mm	24VDC	60W	
BSD-V24-065S	346x30x23.5mm	48VDC	65W	
BSD-V24-100S	346x30x23.5mm	48VDC	100W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Light Source Power	CCT	CRI	Power Type	Package	Label Type
LLS	Pendant tube	LT 60	Curve	C	Diffuser D	No carrier X Silver S White W Black B	Holeless end cap S	2500mm	24VDC Flexible strip F	20W/m 20	1900K CW 2300K LW 2700K SW 3000K WW 3500K PW 4000K NW 5000K DW 6000K W	>80 8 >90 9	3-in-1 Dimming DALI Dimming Non dimming	SEL Whole SEL Individual	SEL C Customized S
LLS	-	LT 60	C	D	X	S	S	2500	F	20	LW	8	D	D	C
LLS	-	LT 60	C	D	X	S	S	2500	-	-	-	-	-	B	C

Ordering profile components SEL-LLS-LT60CDXS2500-BC



Ordering luminaires kits SEL-LLS-LT60CDXS2500-F20LW8D-DC



SEL-LT90



- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space
- Built-in linear power supply, invisible and beautiful
- Two installation ways: pendant and surface mounted

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 30W/m
Transmittance	>85%



Profile Components

Profile X1	PR-LT90 2500mm	
Diffuser 1	CV-LT90 90x2500mm	
End cap 2	EC-LT90 93x8.5mm	

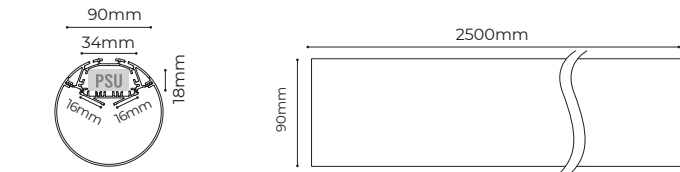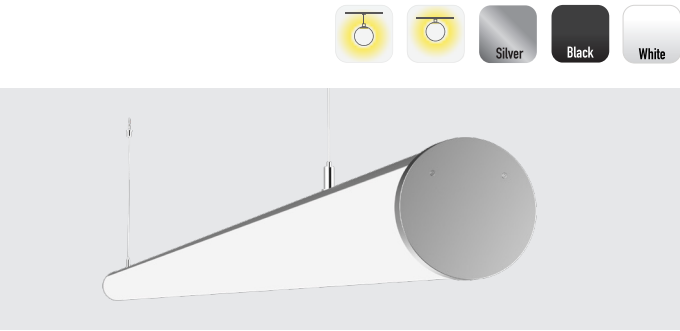


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8160-24V-15mm	λ 80 λ 95	>510LM/m >1280LM/m	24V	9.5W/m	2500x15x1.5mm	160 LEDs	8 LEDs/50mm

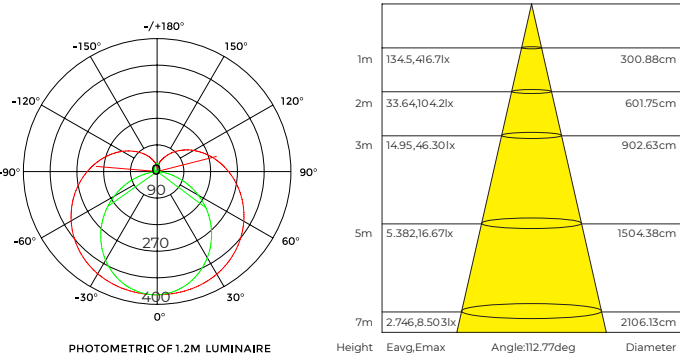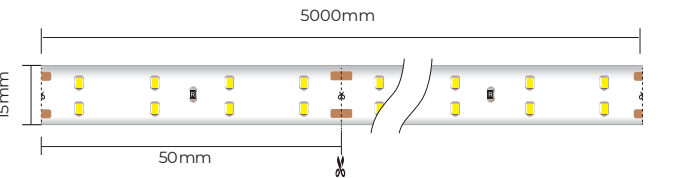

Installation Accessories

Pendant cable (with junction box)	PY-LSXX 2m/4m	
Pendant cable	PN-LXX 2m/4m	
Surface mounted clip	CP-18 20x28.2x10.5mm	

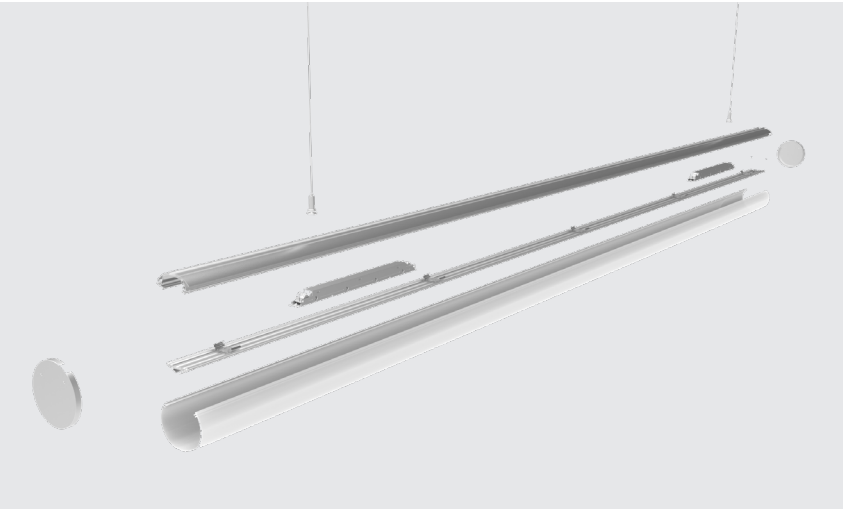

Standard extenders

180° extender	EX-E1 55Å 10Å 2mm	
---------------	----------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-030S	37Å 21Å 19.5mm	24VDC	30W	
BDD-V24-030S	37Å 21Å 19.5mm	24VDC	30W	
BN-V24-060P	305Å 30Å 17mm	24VDC	60W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires


Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type																			
LLS	-	Pendant tube	LT	90	Curve	C	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Flexible strip	F	19W/m	19	1900K	CW	>80	8	3-in-1 Dimming DALI Dimming	D	SEL Whole SEL Individual	B	SEL	C							
											White	B									2300K	LW									>90	9	Non dimming	N	D	Customized	S
											Black	W									2700K	SW															
											3000K	WW																									
											3500K	PW																									
											4000K	NW																									
											5000K	DW																									
											6000K	W																									
LLS	-		LT	90		C		D		X	S		S	2500	-		F	19		LW		B		D	-		D		C								
LLS	-		LT	90		C		D		X	S		S	2500	-										-		B		C								

Ordering profile components SEL-LLS-LT90CDXSS2500-BC Ordering luminaires kits SEL-LLS-LT90CDXSS2500-F19LW8D-DC


SEL-LT120

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

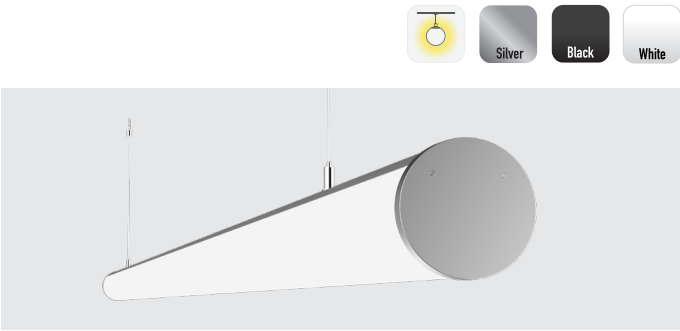

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003  Spraying RAL9005  Anodizing 
Diffuser material	PC
Heat dissipation capability	Max 45W/m
Transmittance	>85%


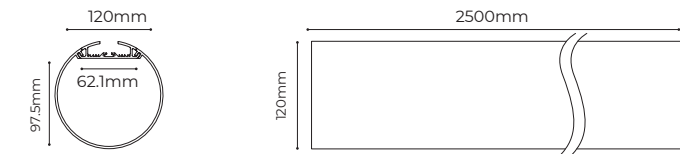


Profile Components

Profile X1	PR-LT120 2500mm	
Diffuser 1	CV-LT120 120x2500mm	
End cap 2	EC-LT120 123.2x10mm	


Lighting Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8420-24V-59mm	λ 80 λ 95	3900 LM/m 3310 LM/m	24V	30W/m	2500Å 59Å 1.5mm	420 LEDs	21 LEDs/50mm
D58480-48V-59mm	λ 80 λ 90	4600 LM/m	48V	30W/m	2500Å 59Å 1.5mm	480 LEDs	16 LEDs/33.3mm

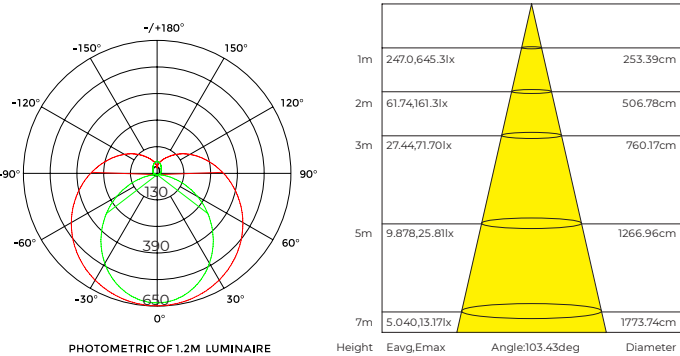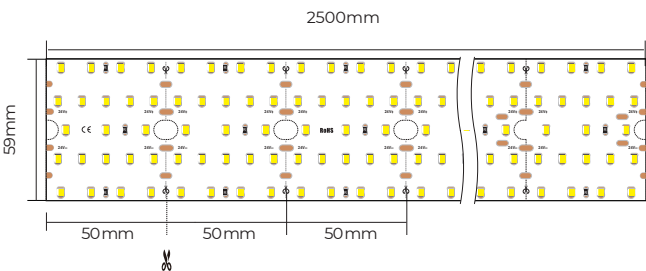

Installation Accessories

Pendant cable (with junction box)	PY-SSXX 2m/4m	
Pendant cable	PN-SXX 2m/4m	

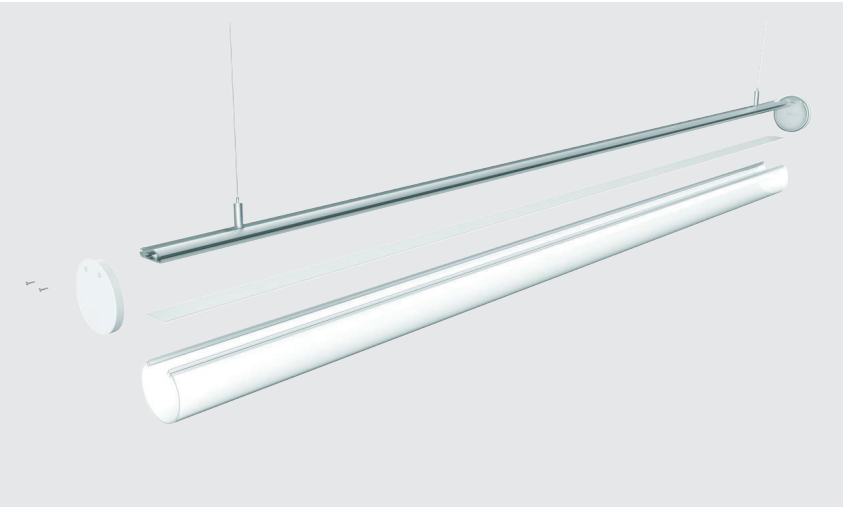

Standard extenders

180° extender	EX-09 13.3x2.65x1000mm	
---------------	---------------------------	---

Power Supply

Model	Size	Output voltage	Output Power	Drawing
BSD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BDD-V24-100S	373Å 39Å 27mm	24VDC	100W	
BN-V24-100P	320Å 30Å 18.3mm	24VDC	100W	
BSD-V48-150S	373X39X27mm	48VDC	150W	
BSD-V48-200S	373X39X27mm	48VDC	200W	

Parts of profile components can be purchased separately
The luminous flux is the testing result of 4000K product
Can select power supply with lower power according to the actual power of luminaires

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Pendant tube	LT	120	Curve	C	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500mm	-	24VDC Flexible strip	F	36W/m	36	1900K	GW	>80	8	3-in-1 Dimming	D	SEL Whole	B	SEL	C
											White	W									2300K	LW	>90	9	DALI Dimming	A	SEL Individual	D	Customized	S
											Black	B									2700K	SW			Non dimming	N				
											3000K	WW																		
											3500K	PW																		
											4000K	NW																		
											5000K	DW																		
6000K	W																													
LLS	-		LT	120		C		D	X	S		S	2500	-		F		36		LW	8			D	-		D		C	
LLS	-		LT	120		C		D	X	S		S	2500	-												-		B		C













Ordering profile components SEL-LLS-LT120CDXSS2500-BC Ordering luminaires kits SEL-LLS-LT120CDXSS2500-F36LW8D-DC









LLS-C series

S E L Curve Lighting System, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The straight and curve basic modules are utilized to produce various circular luminaires, interconnect curves freely and intersperse combined structure randomly. limitless possibilities produce limitless imagination. The flowing light shuttles back and forth along the edge of ceilings, wall and floors, creating thousands of styles and opening new illumination horizons.

Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
AS3535 Series							
SEL-AS3535-03A90		35X35,D320 90°			Downward	DY8140-24V-20mm-03A90	
SEL-AS3535-03N90		35X35,D320 90°			Inward	D8140-24V-20MM	
SEL-AS3535-03W90		35X35,D320 90°			Outward	D8140-24V-20mm	
SEL-AS3535-04T90L		35X35X400			twist 90°left	DT8140-24V-20MM	
SEL-AS3535-04T90R		35X35X400			twist 90°right	DT8140-24V-20MM	
SEL-AS3535-05T180		35X35X500			twist 180°	DT8140-24V-20MM	
SEL-AS3535-08A45/90		35x35, D800 45°/ 90°			Downward	DY8140-24V-20mm-08A45	
SEL-AS3535-15A45/90		35x35, D1500 45°/ 90°			Downward	DY8140-24V-20mm-15A45	
SEL-AS3535-30A45		35x35, D3000 45°			Downward	DY8140-24V-20mm-30A23	
SEL-AS3535-2500		35x35x2500			Downward	DY8140-24V-20mm DT8140-24V-20MM	
SEL-AS3535-15N90		35x35, D1500 90°			Inward	D8140-24V-20mm	
SEL-AS3535-15W90		35x35, D1500 90°			Outward	D8140-24V-20mm	


Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
AH5060 Series							
SEL-AH5060-10A45/90		50x60, D1000 45°/ 90°			Upward&Downward	DY8140 -24V-20mm-10A45	
SEL-AH5060-15A45/90		50x60, D1500 45°/ 90°			Upward&Downward	DY8140 -24V-20mm-15A45	
SEL-AH5060-30A45		50x60, D3000 45°			Upward&Downward	DY8140 -24V-20mm-30A23	
SEL-AH5060-2500		50x60x2500			Upward&Downward	DY8140 -24V-20mm D8140 -24V-20MM	
SEL-AH5060-15N90		50x60, D1500 90°			Inward&Outward	D8140 -24V-20mm	
SEL-AH5060-15W90		50x60, D1500 90°			Inward&Outward	D8140 -24V-20mm	


Light Source for LLS-C

Model	Drawing	LEDs	LEDs/cut	Entry Cable	DC(V)	Max.	Typ.		LM(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Flexible light source														
SEL-D8140-24V-20mm		140/m	14/98mm		24	21.1W/m	19.2W/m		2120LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	4712x20x1.5mm	4.7M/Roll	AS3535-15N90 AS3535-15W90 AH5060-15W90 AH5060-15N90
SEL-DT8140-24V-20mm		140/m	14/100mm		24	21.1W/m	19.2W/m		2490LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x20x1.5mm	5M/Roll	AS3535-03N90 AS3535-03W90 AS3535-2500 AS3535-04T90L AS3535-04T90R AS3535-05T180 AH5060-2500
Rigid modular														
SEL-DY8140-24V-20mm		70/pcs	14/100mm		24	10.6W/pcs	9.6W/pcs		1060LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	499x20x5.8mm	20pcs/Set	AS3535-2500 AH5060-2500
SEL-DY8140-24V-20mm-08A45		42/pcs	14		24	6.4W/pcs	5.8W/pcs		650LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8pcs/Set	AS3535-08A45 AS3535-08A90
SEL-DY8140-24V-20mm-10A45		56/pcs	14		24	8.3W/pcs	7.5W/pcs		820LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AH5060-10A45 AH5060-10A90
SEL-DY8140-24V-20mm-15A45		84/pcs	14		24	12.8W/pcs	11.6W/pcs		1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AS3535-15A45 AS3535-15A90 AH5060-15A45 AH5060-15A90
SEL-DY8140-24V-20mm-30A23		84/pcs	14		24	12.8W/pcs	11.6W/pcs		1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	AS3535-30A45 AH5060-30A45
SEL-DY8140-24V-20MM-03A90		42/pcs	14		24	6W/pcs	5.4W/pcs		700LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8PCS/SET	AS3535-03A90

Highlight

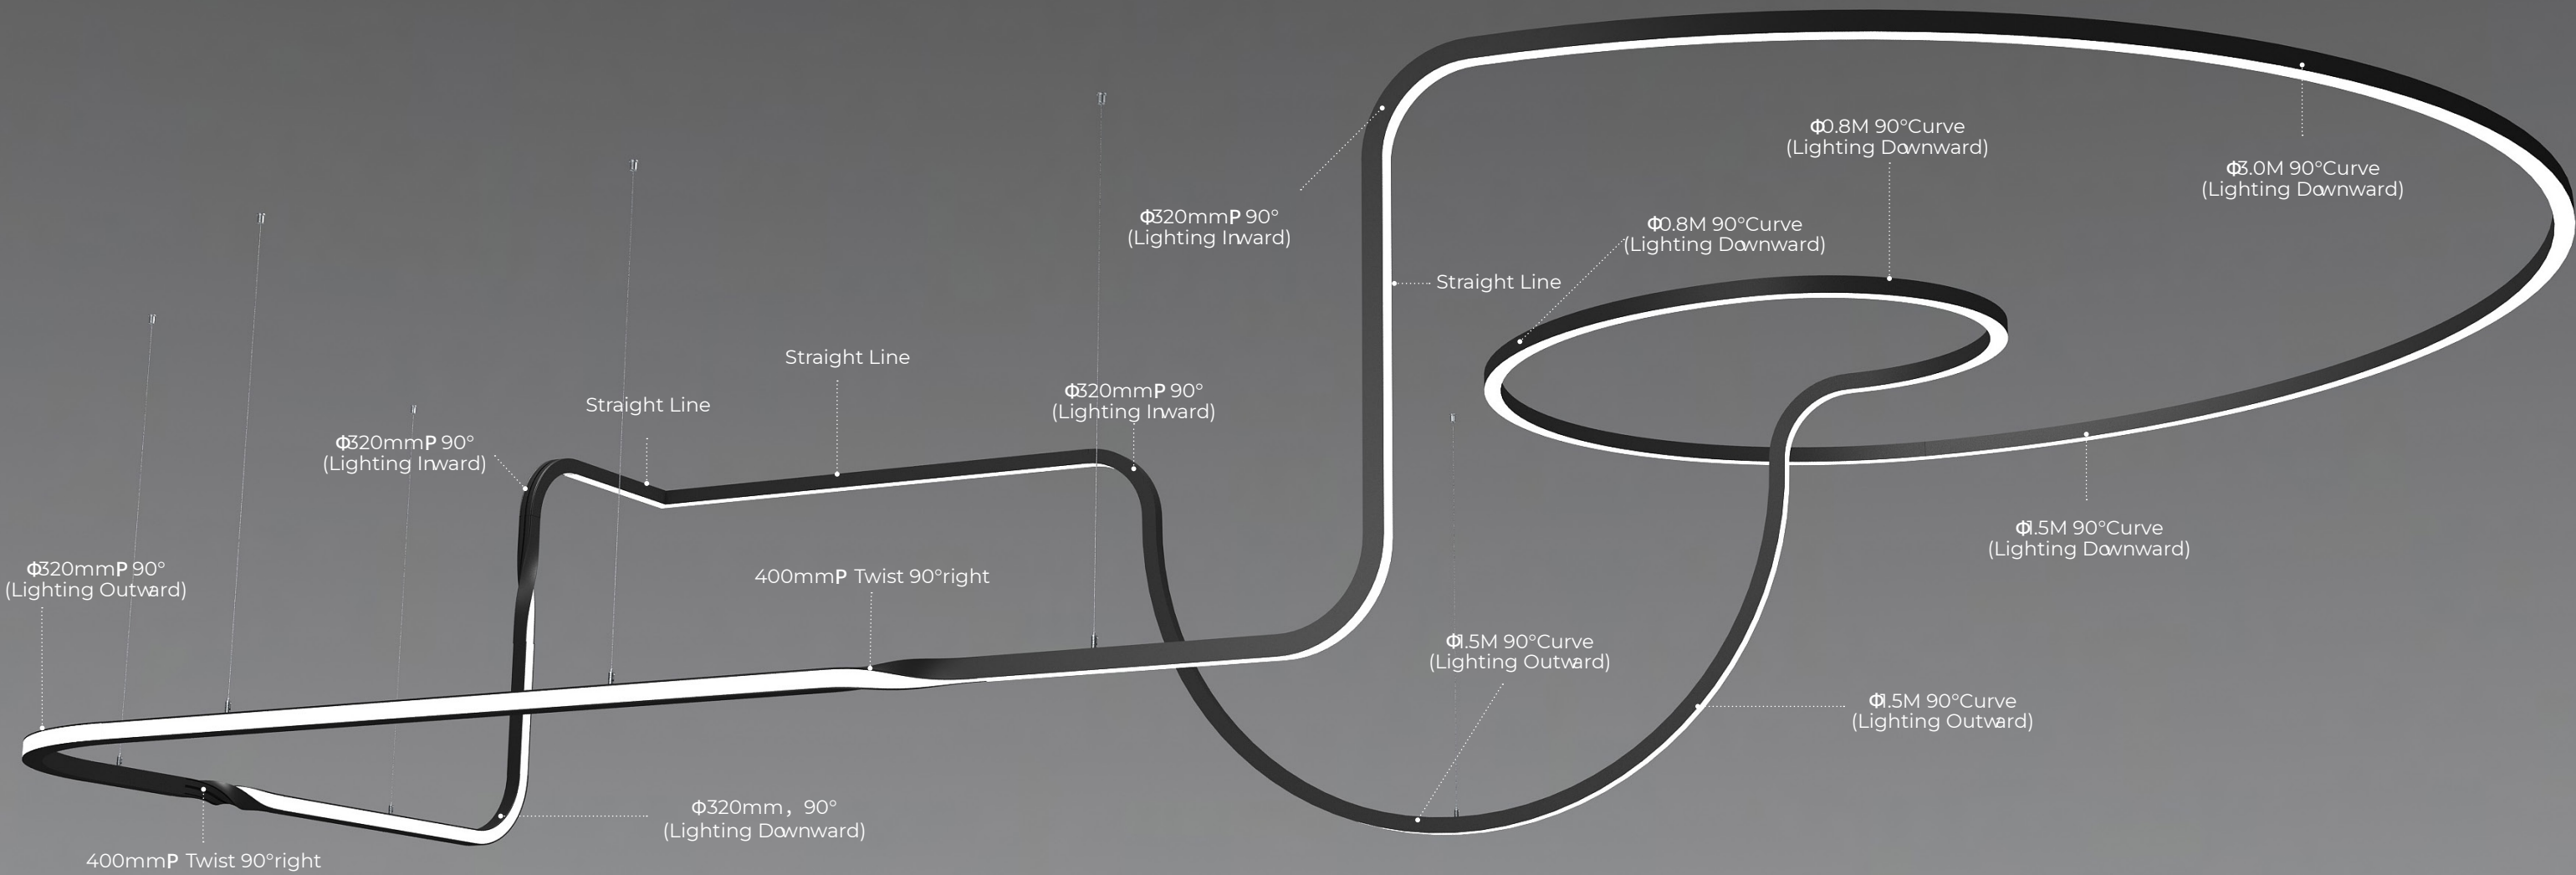


Modularized design:
8 modules can be combined and interconnected freely according to the spatial design.

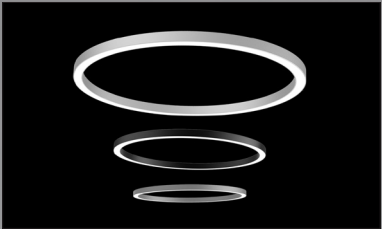

Circular Application:
Can be interconnected into circular luminaires with different diameters.




Curve Application:
Can be interconnected into curves with different radii.

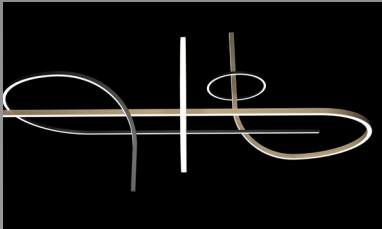

Lighting upward&downward:
AH5060 series available for lighting upward&downward.




Flexible diffuser:
20m/roll flexible diffuser, ultra-long application in 3D space without connection and light leakage, 8 modules can share the same difuser.

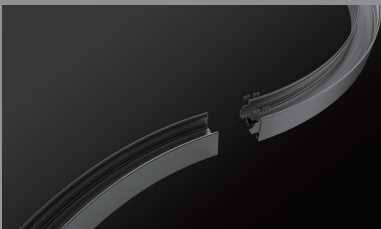

Interconnection without light leakage:
Brand new connectors, convenient using and no light leakage.


Curve Lighting Solution

SEL-AS3535 Series

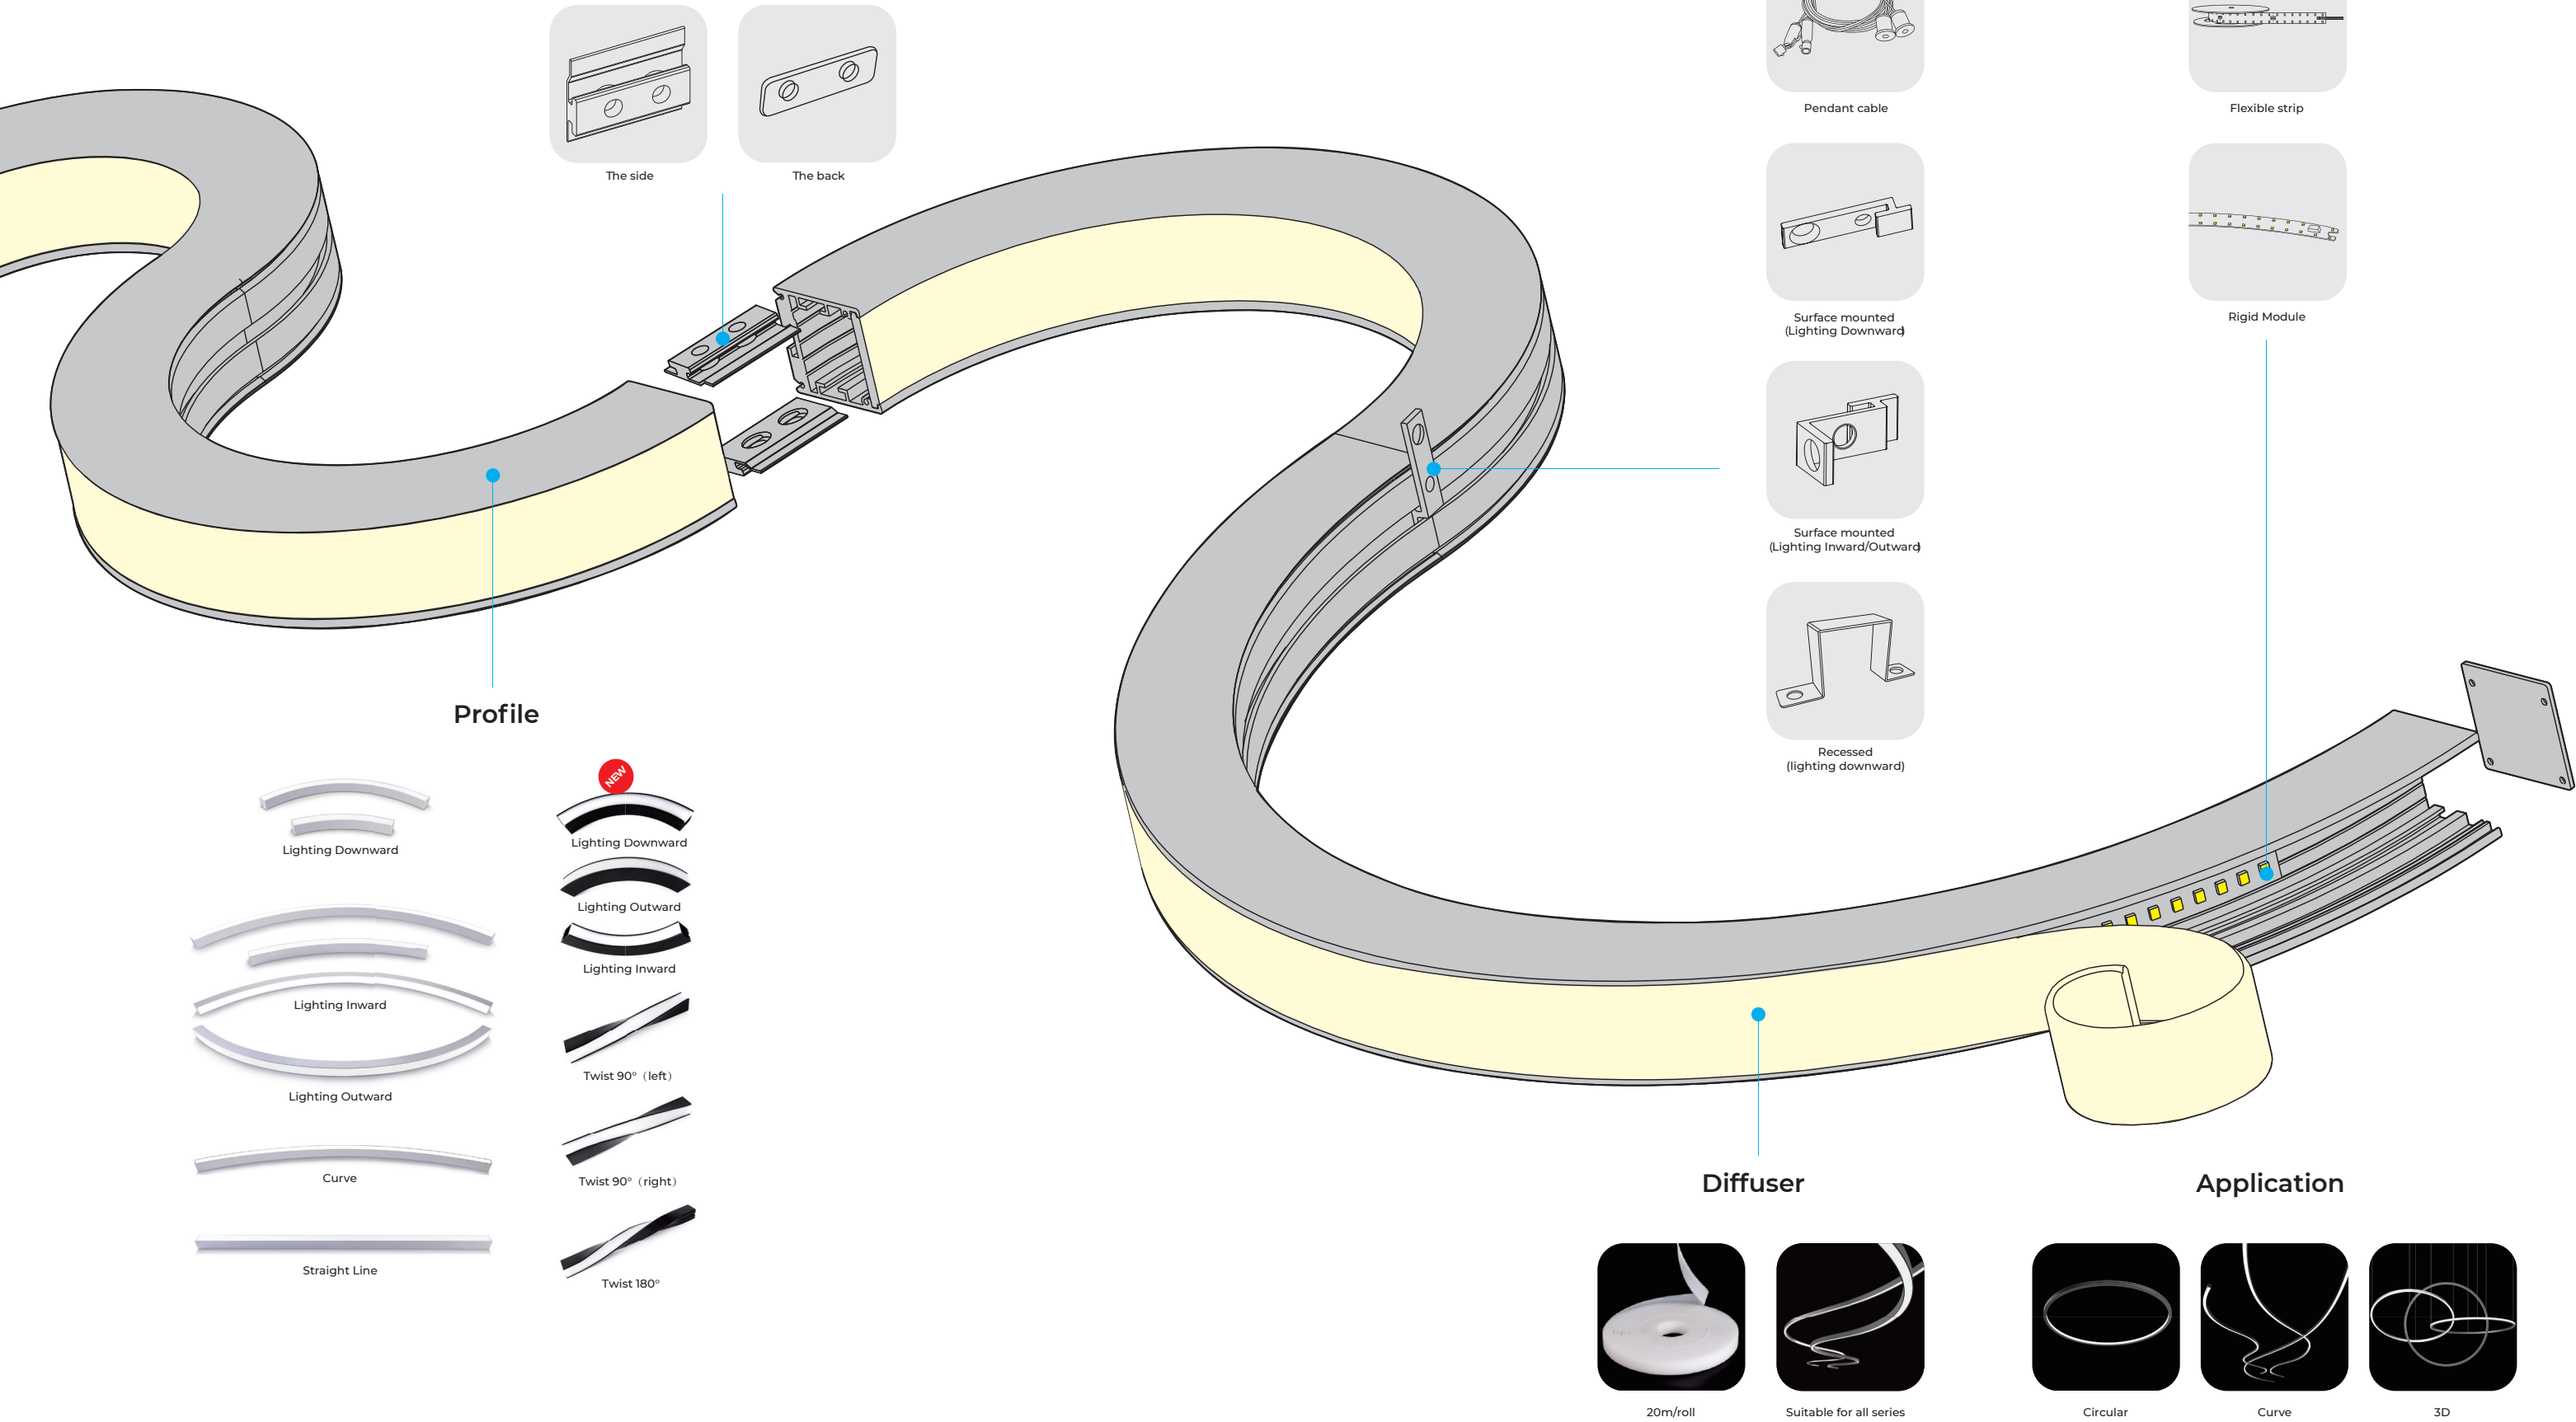

Curve Lighting Solution

SEL-AH5060 Series

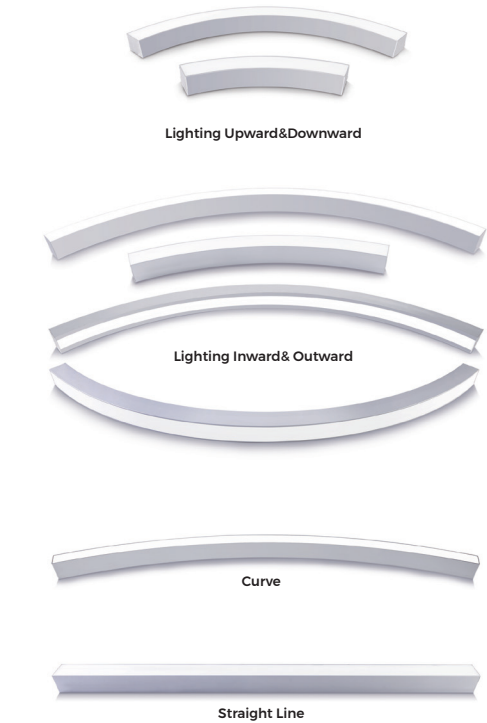


Profile

Installation accessories




Pendant wire



Clip

Connectors



Diffuser



20m/roll
Inward:47×4MM



20m/roll
Outward:32×3.5MM



Suitable for all series

Application



Circular



Curve




3D

Light source




Flexible strip



Rigid Module

Basic Modules

SEL-AS3535 Series

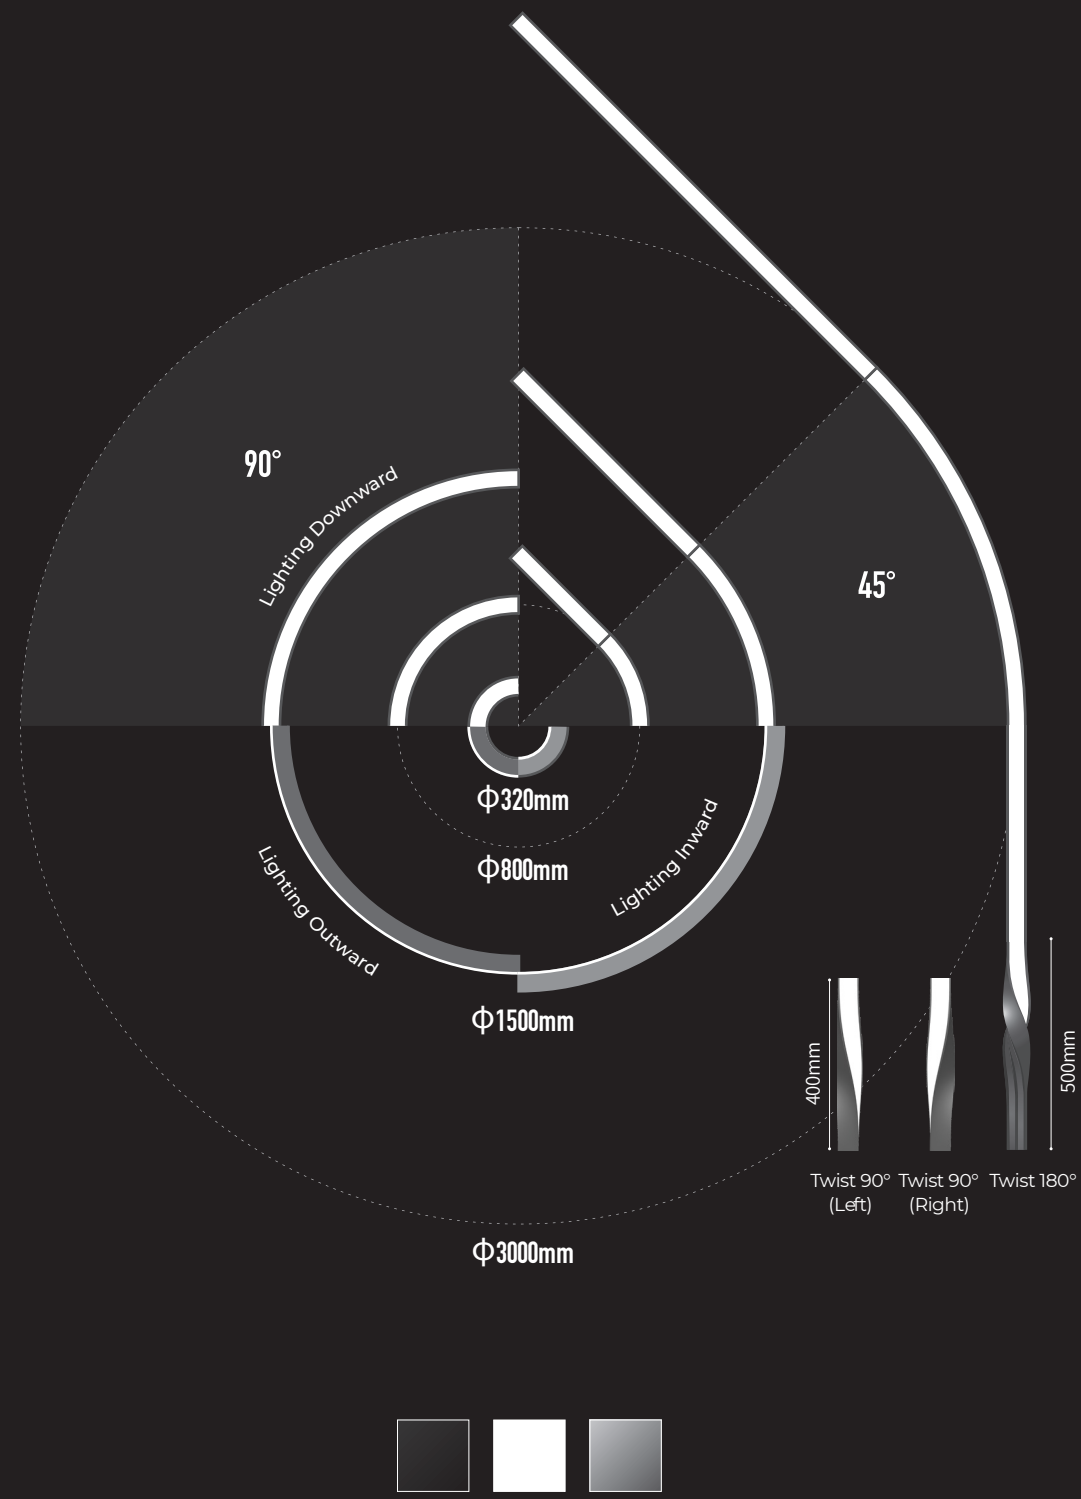

Φ800mm, Curve 90° (Lighting Downward),
45° Rigid Modular

Φ800mm, Curve 45° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 90° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 45° (Lighting Downward),
45° Rigid Modular

Φ1500mm, Curve 90° (Lighting Inward),
Flexible Strip

Φ1500mm, Curve 90° (Lighting Outward),
Flexible Strip

Φ3000mm, Curve 45° (Lighting Downward),
22.5° Rigid Modular

Straight Line (2500mm),
Rigid Module (499mm)

Φ320mm, Curve 90° (Lighting Downward),
90° Rigid Modular

Φ320mm, Curve 90° (Lighting Outward),
Flexible Strip

Φ320mm, Curve 90° (Lighting Inward),
Flexible Strip



400mm, Twist 90°N left), Flexible Strip

400mm, Twist 90°N right), Flexible Strip

500mm, Twist 180°, Flexible Strip




Basic Modules

SEL-AH5060 Series

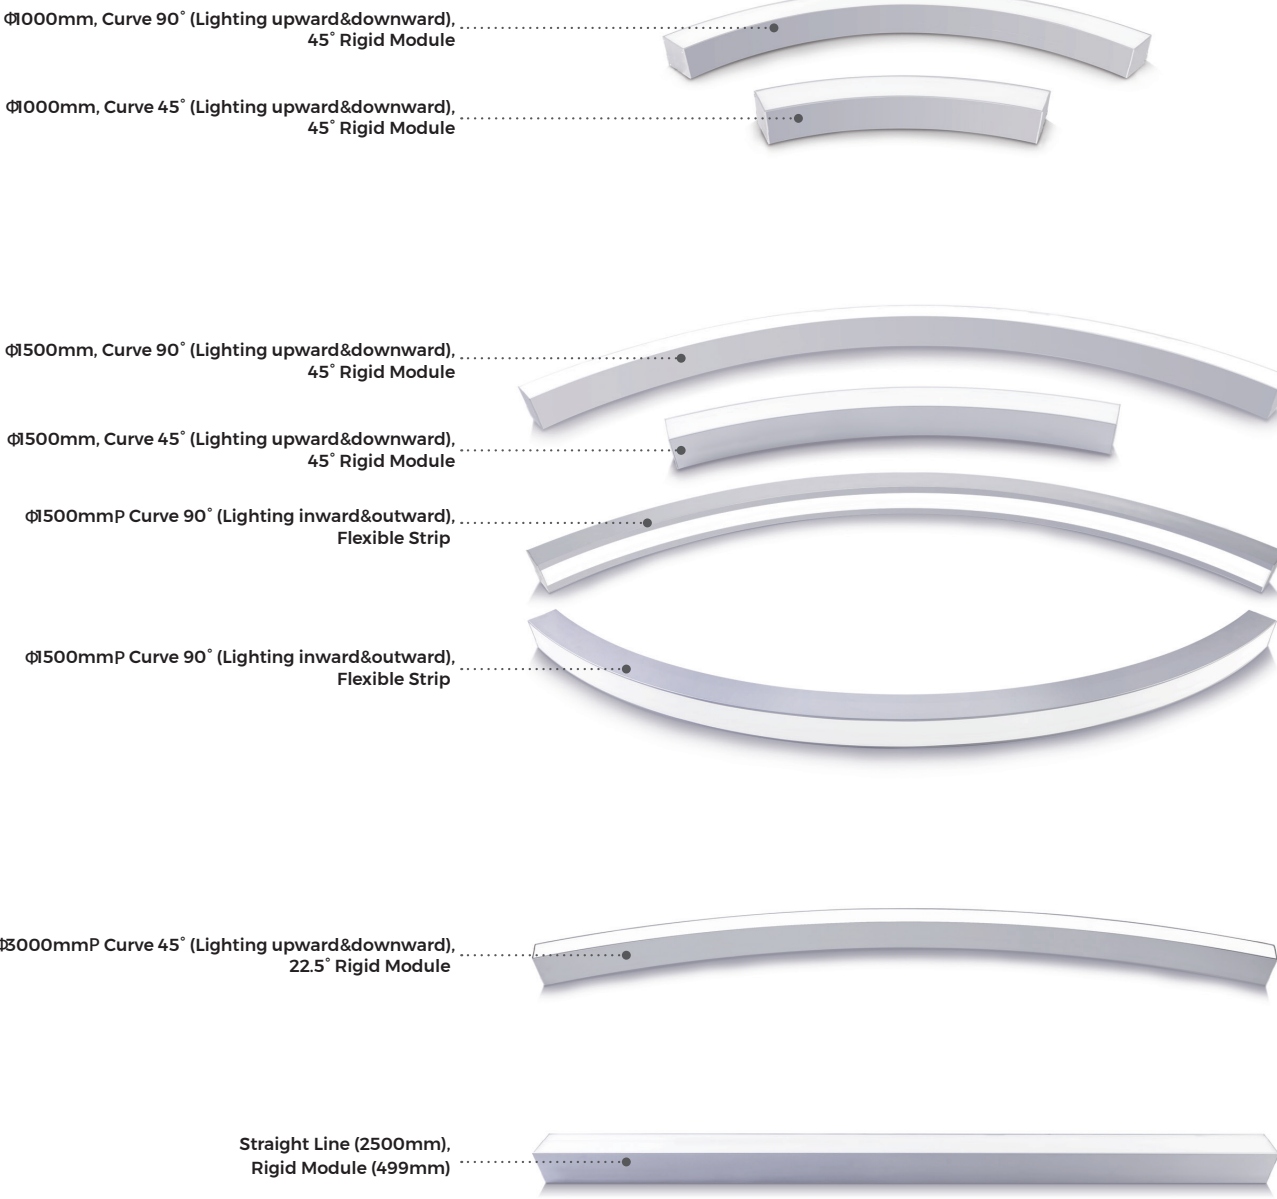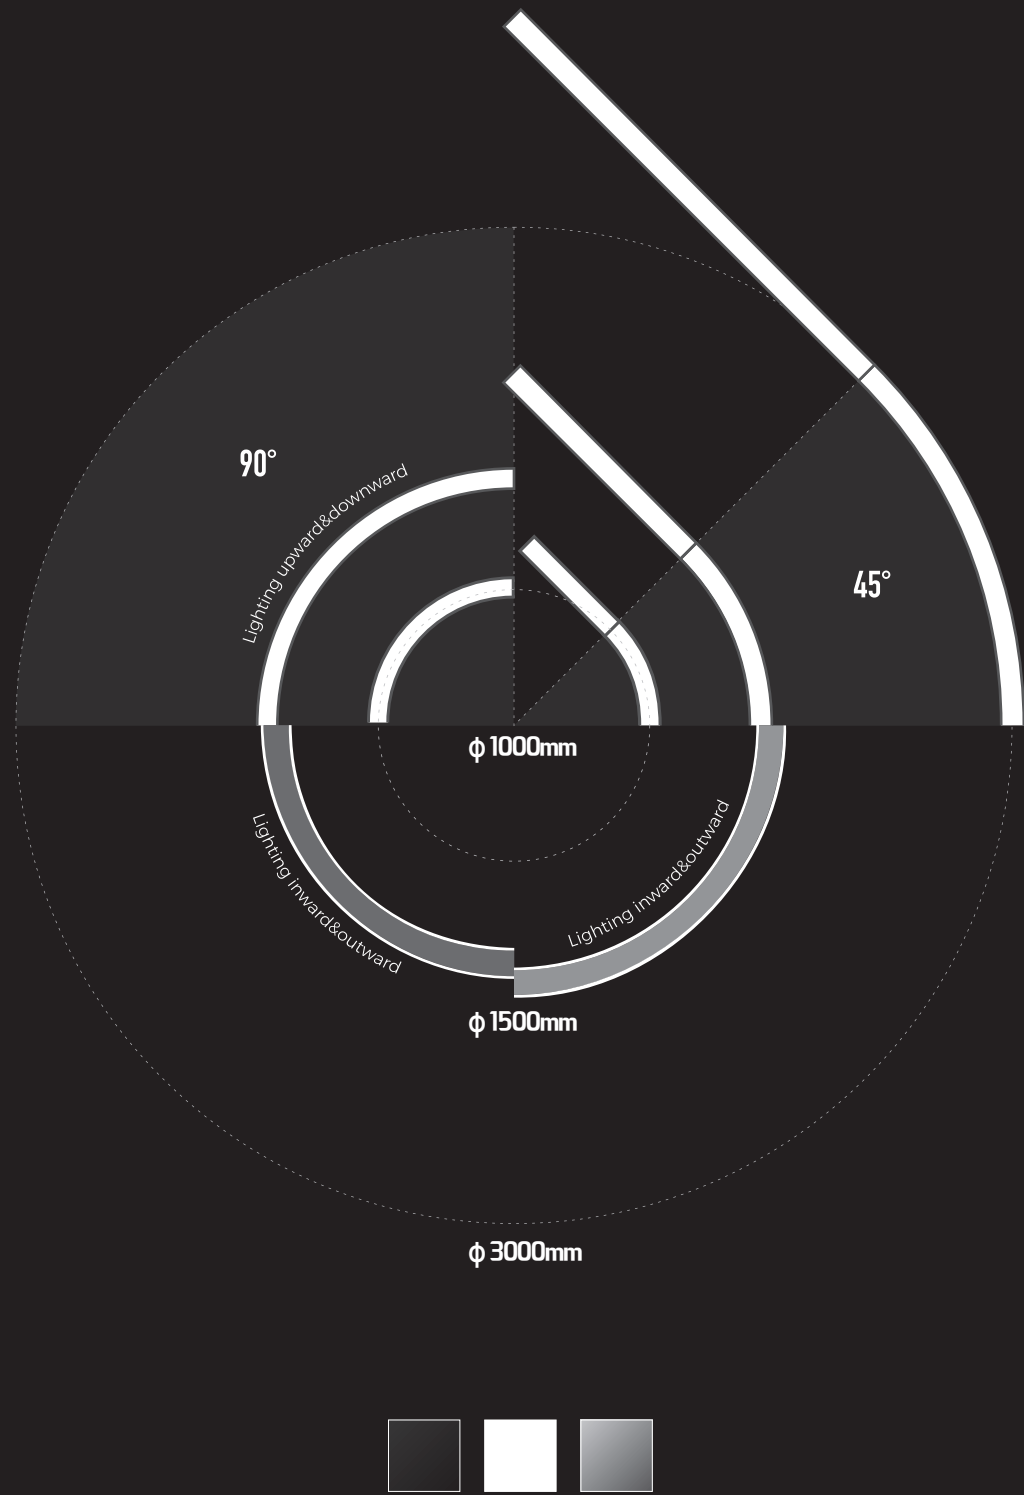


Lighting Source Solution

- 1 Rigid modularP available for lighting downward curve modules/ straight modules
- 2 Flexible strip, available for lighting inward curve modules/ lighting outward curve modules/twist modules/straight modules

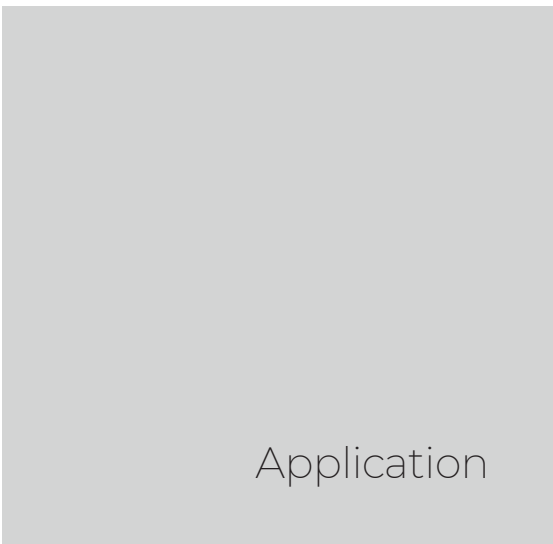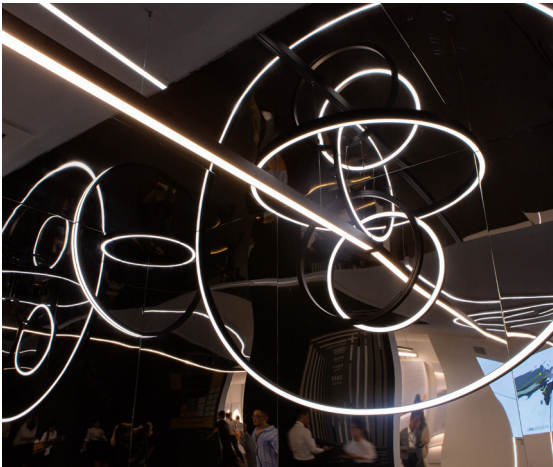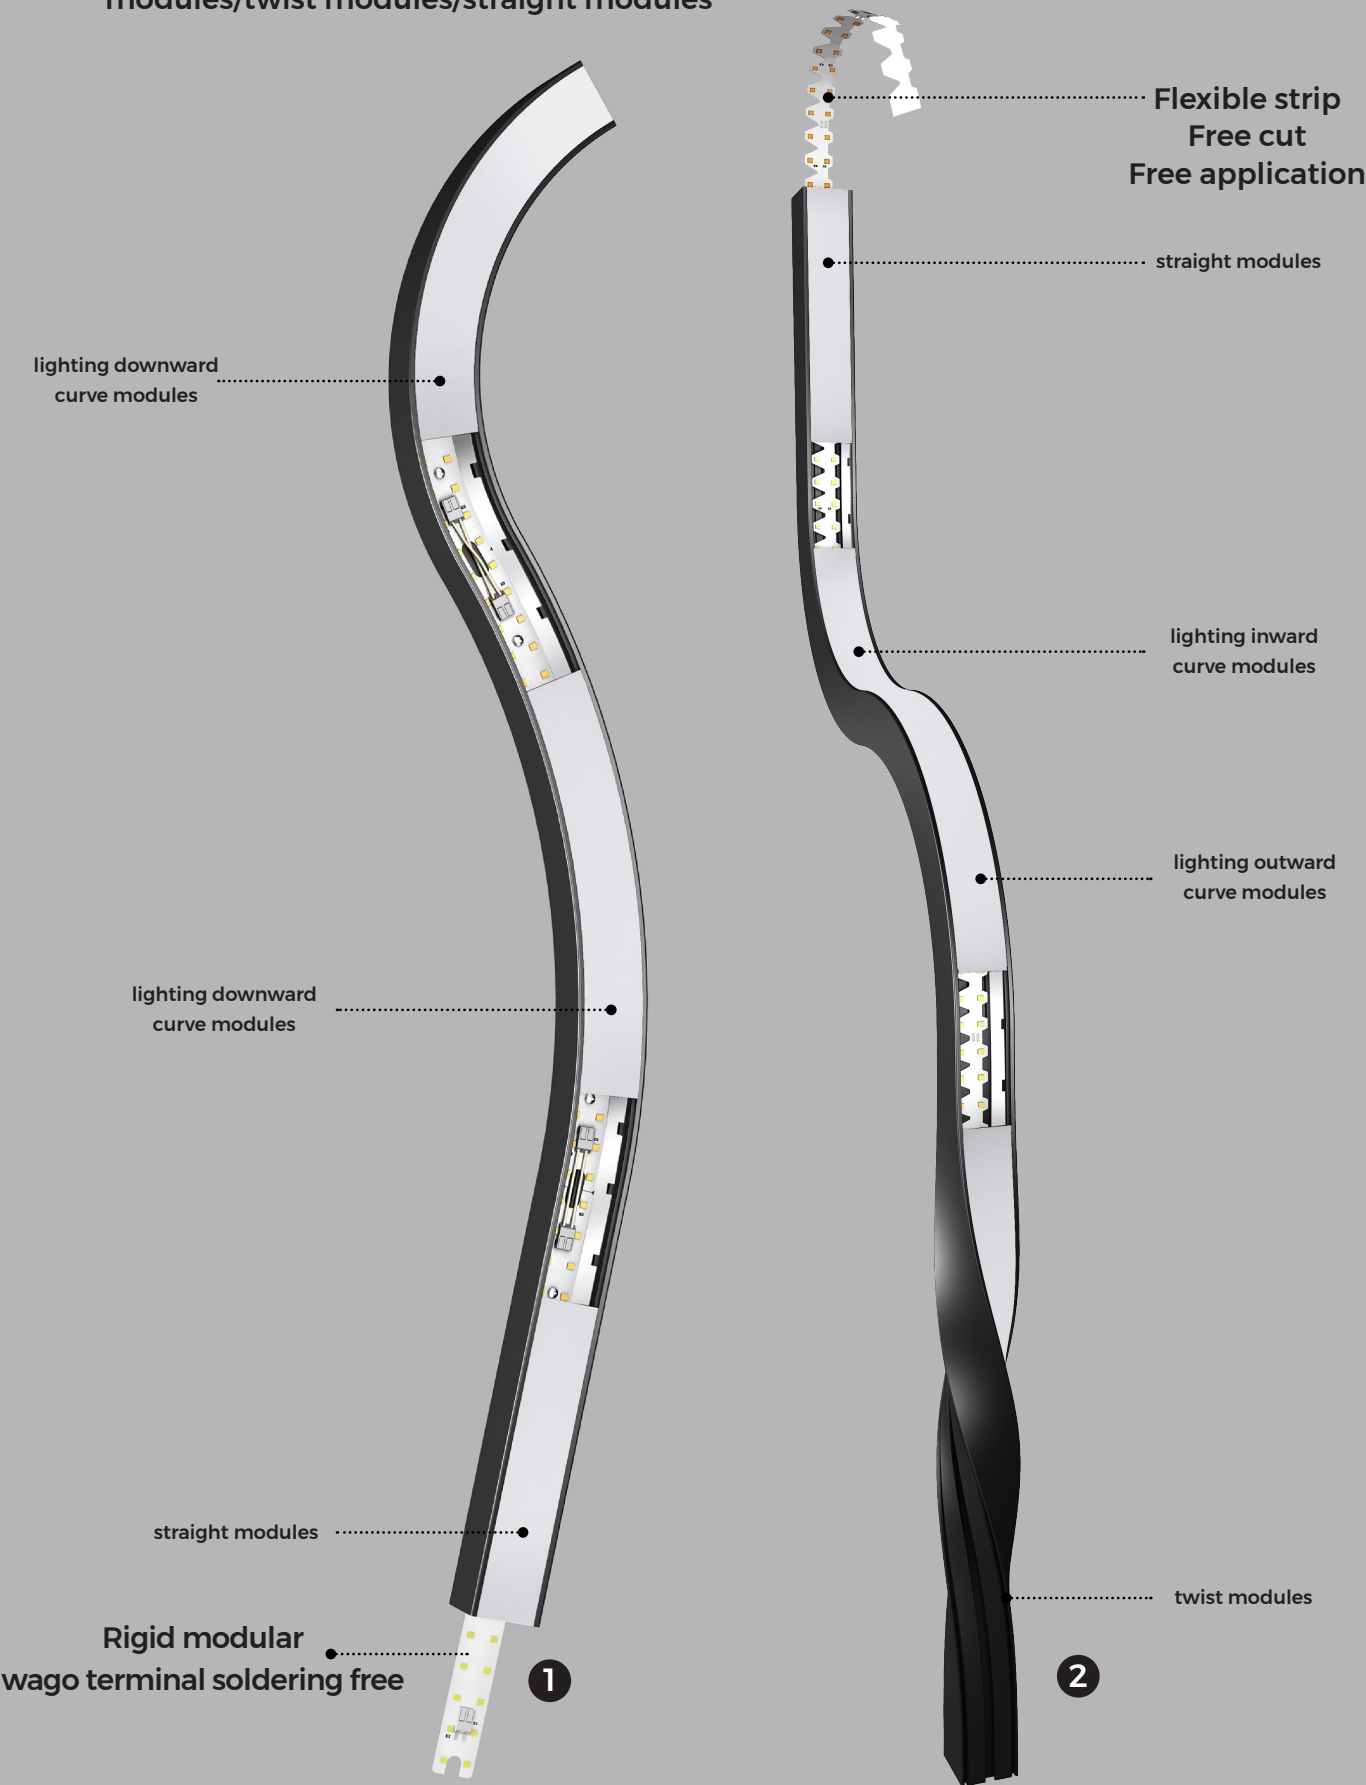


SEL-AS3535-03A90

- $\phi 0.32M$ 90° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

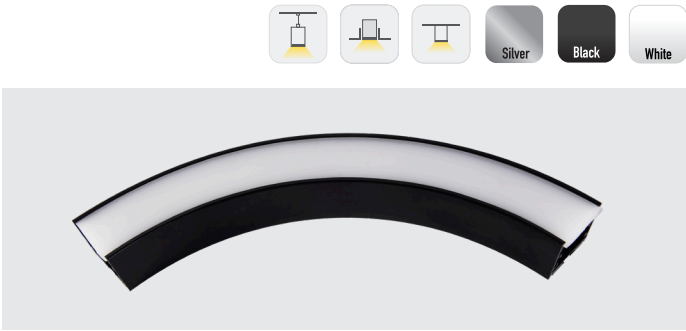

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

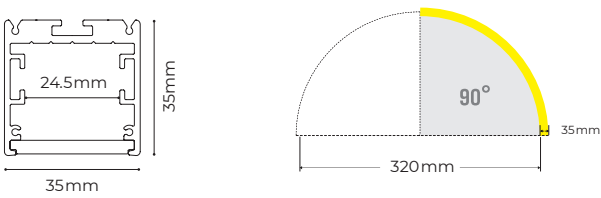

Profile components


Profile	PR-AS3535-03A90 35Å 35mm,D320mm,90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PE-KXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	
	TL-03 78Å 34Å 15mm	

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-03A90	>80	700LM/M	24V	5.4W/m	D320x90°x20 x5.8mm	42LEDs	14LEDs

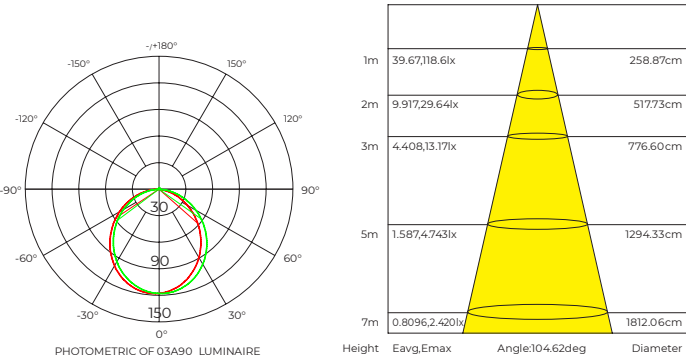


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	320mm lighting down 90°
		-				White	W	
		-				Black	B	
	PR	-		AS	3535		B	03A90

Ordering profile components


SEL-AS3535-03N90

- $\phi 0.32M$ 90° arc (lighting inward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted

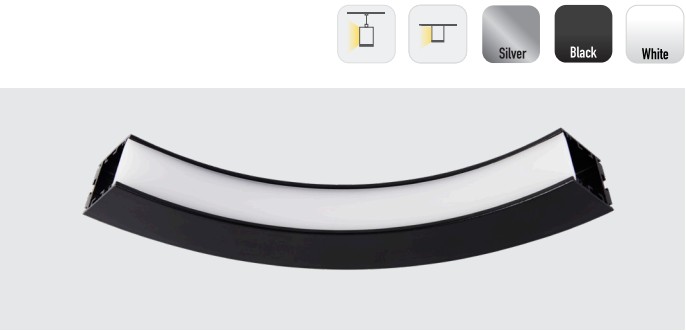

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

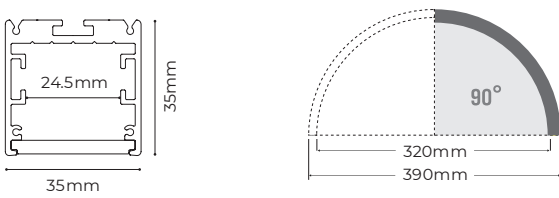

Profile components


Profile	PR-AS3535-03N90 35x35mmP D320mmP90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V- 20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs

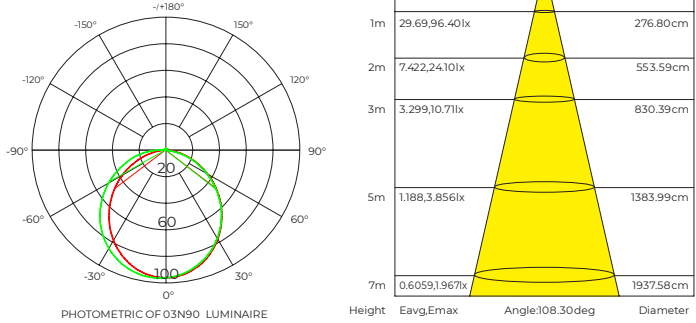


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting inward 90°
		-				White	W	
		-				Black	B	
	PR	-		AS	3535		B	15N90

Ordering profile components


SEL-AS3535-03W90

- ϕ 0.32M 90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted

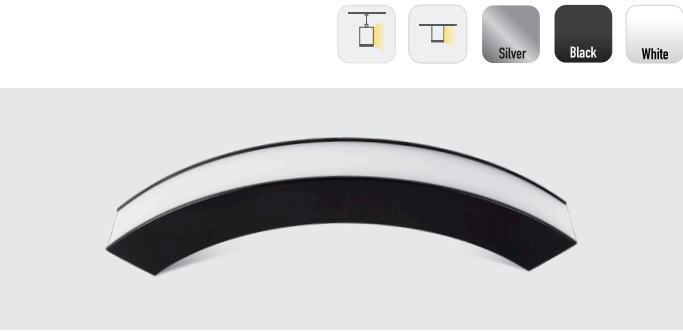

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

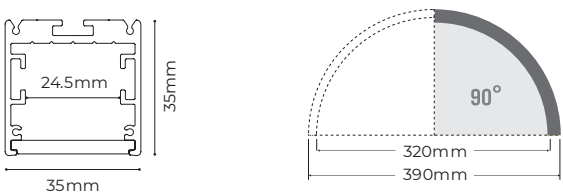

Profile components


Profile	PR-AS3535-03W90 35x35mmP0320mmP90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DTB140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

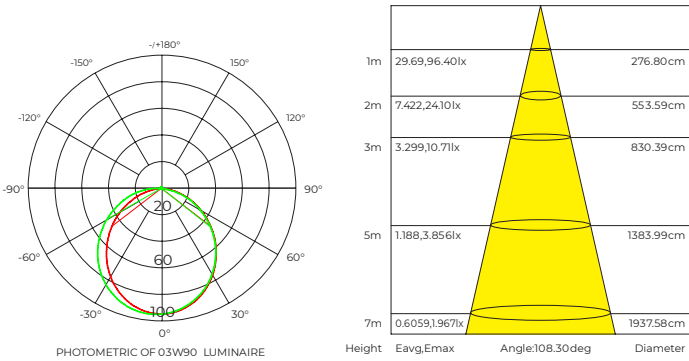


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	320mm lighting outward 90°
						White	W	
						Black	B	
	PR	-		AS	3535		B	03W90

Ordering profile components


SEL-AS3535-04T90L

- 0.4M twist 90° left, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

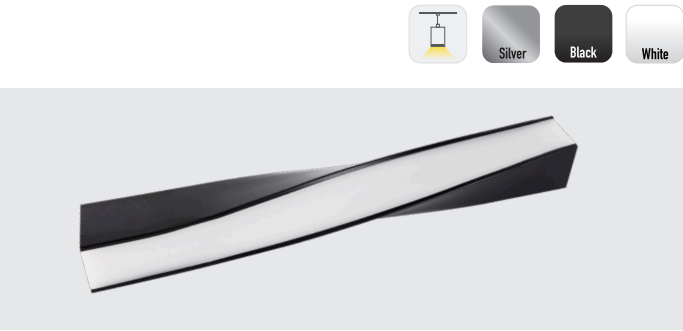

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

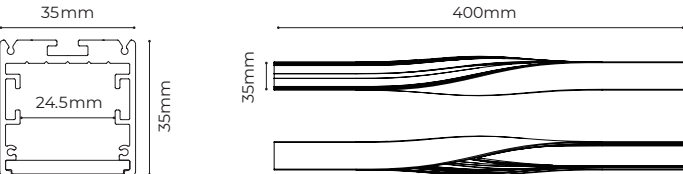

Profile components


Profile	PR-AS3535 35Å 35Å 400mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DTB140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

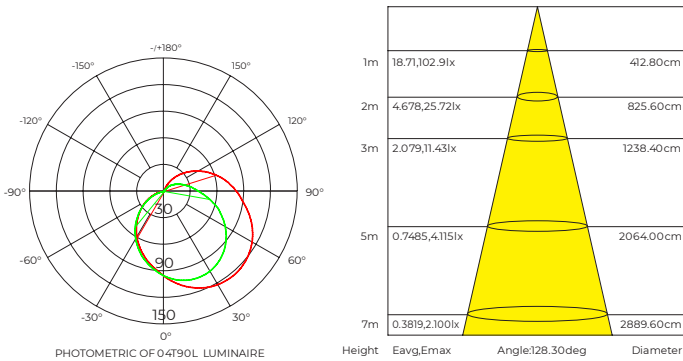


Ordering Code

Category			-	Series	Section Size	Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	400MM twist 90°left
						White	W	
						Black	B	
	PR	-		AS	3535		B	04T90L

Ordering profile components


SEL-AS3535-04T90R

- 0.4M twist 90° right, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

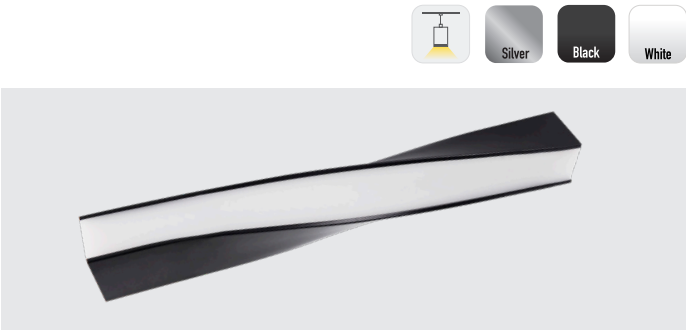

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

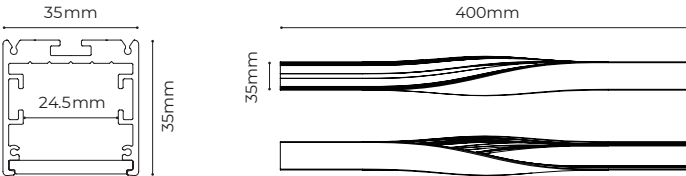

Profile components


Profile	PR-AS3535 35Å 35Å 400mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

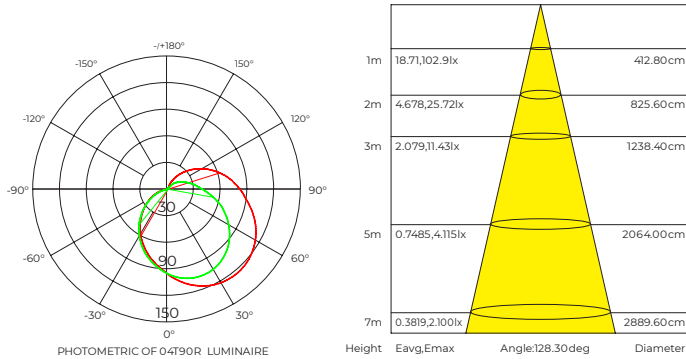


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	400MM twist 90°right
		White				W		
		Black				B		
	PR	-		AS	3535		B	04T90R

Ordering profile components


SEL-AS3535-05T180

- 0.5M twist 180°, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

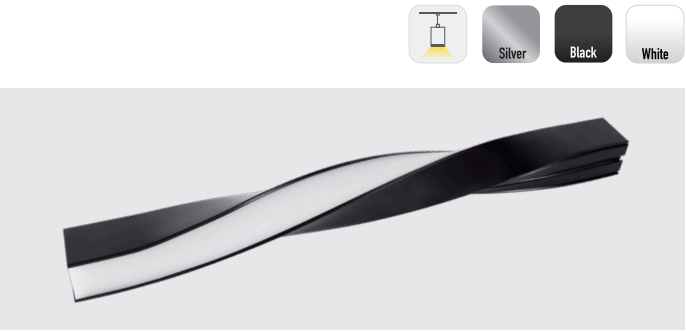

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

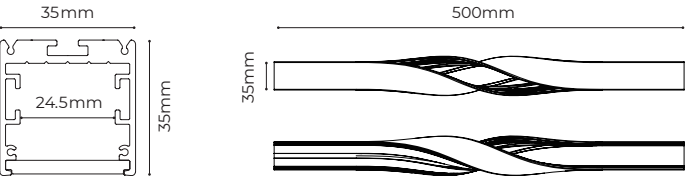

Profile components


Profile	PR-AS3535 35Å 35Å 500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Lighting Source

Flexible strip								
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

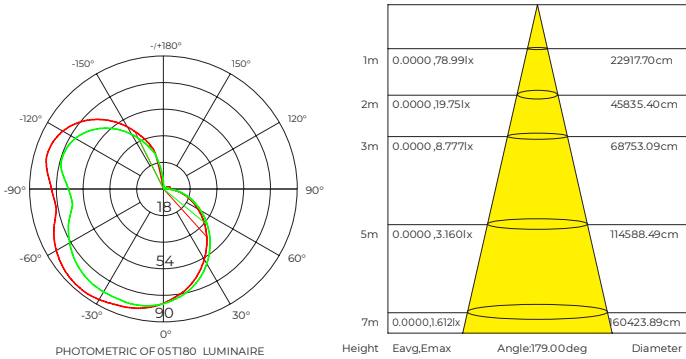


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant	AS	3535	Silver	S	500MM twist 180°
		White				W		
		Black				B		
	PR	-		AS	3535		B	05T180

Ordering profile components


SEL-AS3535-08A45/90

- ϕ 0.8m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

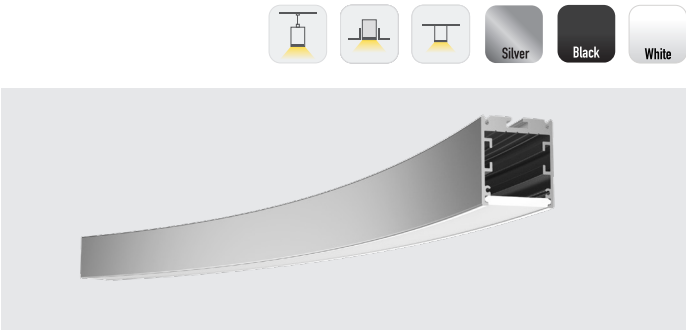

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

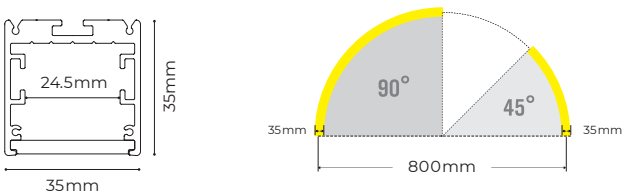

Profile components

Profile	PR-AS3535-08A45/90 35Å 35mm,D800mm,45&90ã	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBCA 250x20x0.6mm	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 30Å 23.5Å 4.6mm	
-----------	--------------------------	--


Ordering Code

Category		-	Series		Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535		Silver	S	800mm lighting downward 45& 800mm lighting downward 90ã
							White	W	
							Black	B	
	PR	-		AS	3535			B	OBA45

Ordering profile components


SEL-AS3535-15A45/90

- ϕ 1.5m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

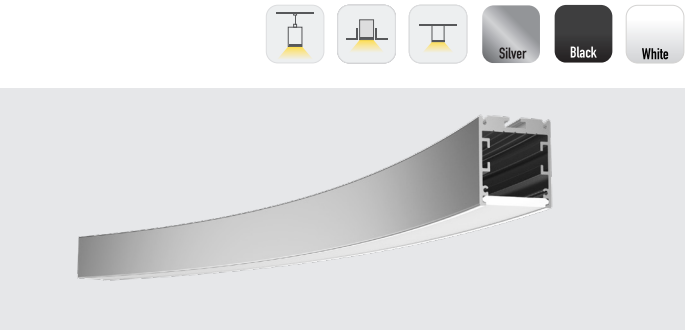

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

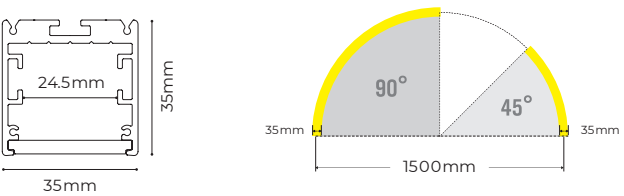

Profile components

Profile	PR-AS3535-15A45/90 35Å 35mm,D1500mm,45/90ã	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 15mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 L30Å 23.5Å 4.6mm	
-----------	---------------------------	--


Ordering Code

Category		-	Series		Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535		Silver	S	1500mm lighting downward 45& 1500mm lighting downward 90ã
							White	W	
							Black	B	
	PR	-		AS	3535			B	15A45

Ordering profile components


SEL-AS3535-30A45

- ϕ 3m 45° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

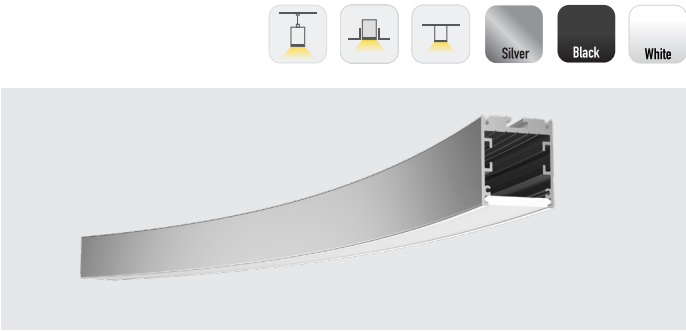

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

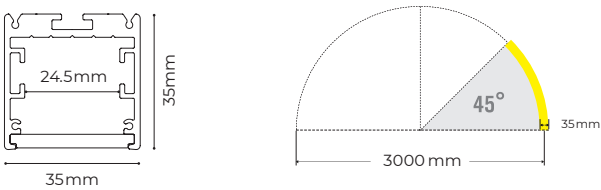

Profile components

Profile	PR-AS3535-30A45 35Å 35mm,D3000mm,45å	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 L30Å 23.5Å 46mm	
-----------	--------------------------	--

Lighting Source

Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-30A23	>80	1300LM/pcs	24V	11.6W/pcs	D3000x22.5Å 20x5.8mm	84LEDs	14LEDs

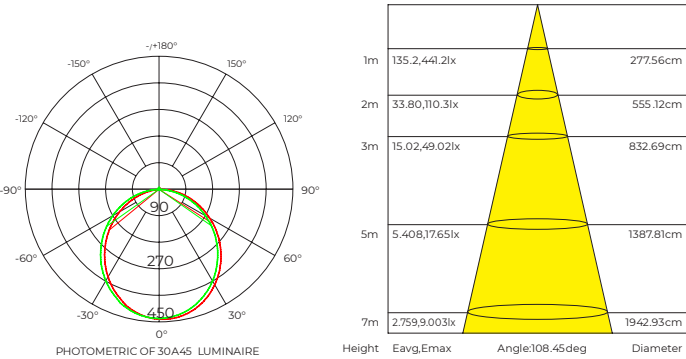


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	3000mm lighting downward 45°
		White				W		
		Black				B		
	PR	-		AS	3535		B	30A45

Ordering profile components SEL-PR-AS3535B30A45


SEL-AS3535-2500

- 2500m straight line, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

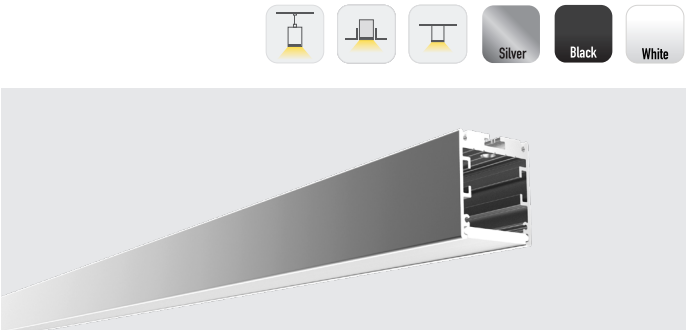

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

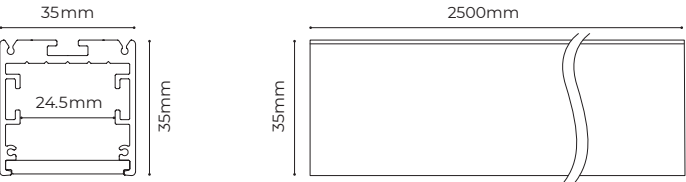

Profile components

Profile	PR-AS3535 35Å 35Å 2500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35Å 35Å 1.5mm	

Installation Accessories


Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78Å 34Å 15mm	

Interconnection Accessories

Connector	EX-26 30Å 23.5Å 46mm	
-----------	-------------------------	--

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	50.00x20x15mm	140LEDs	100mm/14LEDs
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm	>80	1060LM/pcs	24V	9.6W/pcs	499x20x5.8mm	70LEDs	100mm/14LEDs

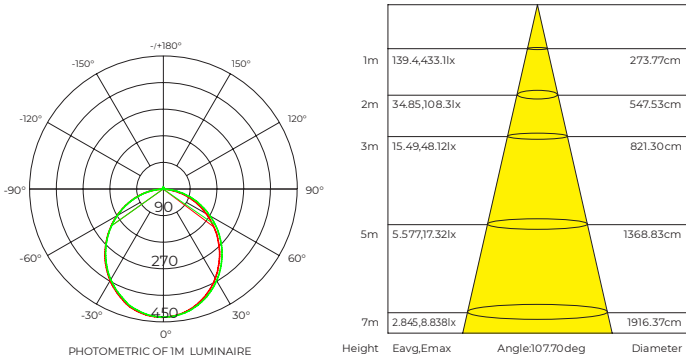

Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted/ recessed	AS	3535	Silver	S	2500mm lighting downward
		White				W		
		Black				B		
	PR	-		AS	3535		B	2500


Ordering profile components SEL-PR-AS3535B2500

SEL-AS3535-15N90

- ϕ1.5m 90° arc (lighting inward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

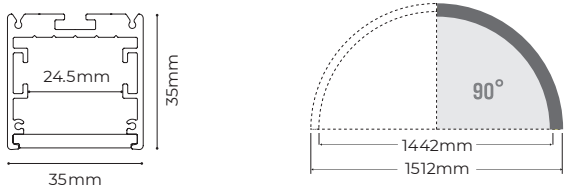

Profile components	
Profile	PR-AS3535-15N90 35x35mmPDI500mmP90ã
Diffuser	CV-AS3535-20000 20m
End cap	EC-AS3535 35Å 35Å 1.5mm

Lighting Source	
Flexible strip	
Model	CRI Lumens (4000 K) Voltage Typ.power Size LEDs/m Cutting unit
DBI40-24V-20mm	>80 2120LM/M 24V 19.2W/m 4712x20x1.5mm 140LEDs 98mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBDB 350x20x0.6mm
Surface buckle	CL-04
Screw set	CL-01 M3.5x40mm

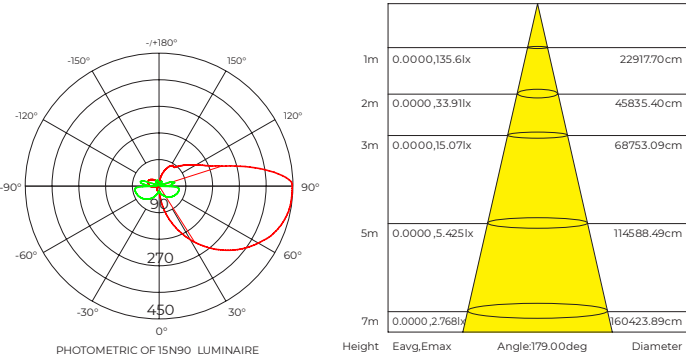

Interconnection Accessories	
Connector	EX-26 L30Å 23.5Å 4.6mm

Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting inward 90°
		White				W		
		Black				B		
	PR	-	AS	3535	B	15N90		


Ordering profile components SEL-PR-AS3535B15N90

SEL-AS3535-15W90

- ϕ1.5m 90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

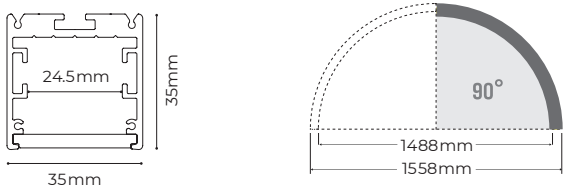

Profile components	
Profile	PR-AS3535-15W90 35x35mmPDI500mmP90ã
Diffuser	CV-AS3535-20000 20m
End cap	EC-AS3535 35Å 35Å 1.5mm

Lighting Source	
Flexible strip	
Model	CRI Lumens (4000 K) Voltage Typ.power Size LEDs/m Cutting unit
DBI40-24V-20mm	>80 2120LM/M 24V 19.2W/m 4712x20x1.5mm 140LEDs 98mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBDB 350x20x0.6mm
Surface buckle	CL-04
Screw set	CL-01 M3.5x40mm

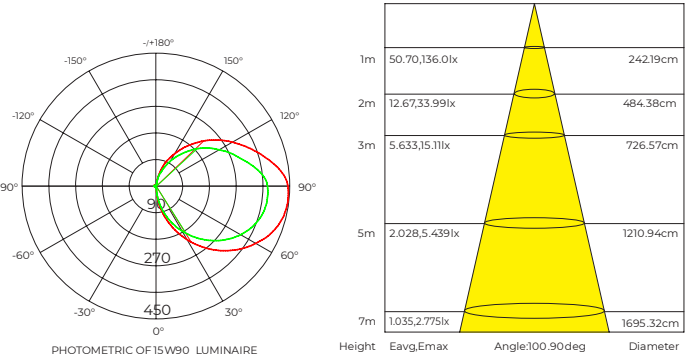


Interconnection Accessories	
Connector	EX-26 L30Å 23.5Å 4.6mm

Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AS	3535	Silver	S	1500mm lighting outward 90°
		White				W		
		Black				B		
	PR	-	AS	3535	B	15W90		

Ordering profile components SEL-PR-AS3535B15W90


SEL-AH5060-10A45/90

- ϕ 1m 45°/90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

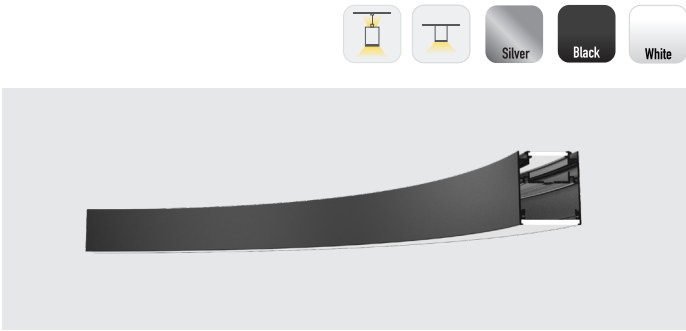


Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

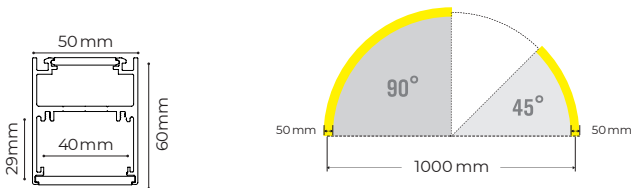

Profile components		
Profile	PR-AH5060-10A45/90 50Å 60,D1000mm,45°/90°	
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm	
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm	
End cap	EC-AH5060 L60Å W50Å H2mm	

Lighting Source							
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-10A45	>80	820LM/pcs	24V	7.5W/pcs	D1000x45Åx20x5.8mm	56LEDs	14LEDs

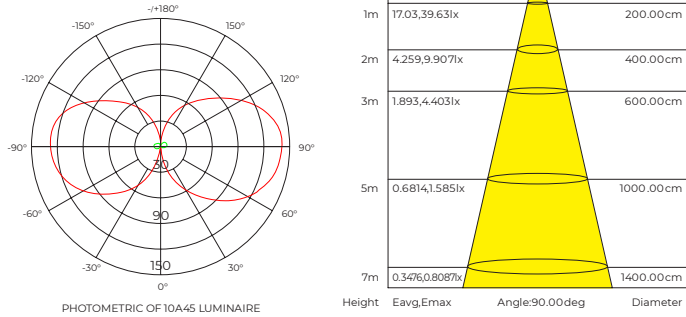

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBCA 250x20x0.6mm	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5Å 20Å 12mm	
Reflective paper	BG-15 16000Å 26Å 2mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--


Ordering Code

Category		-	Series	Section Size	Profile Color	Length		
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1000mm up-down double lighting 45°
						White	W	1000mm up-down double lighting 90°
						Black	B	
	PR	-		AH	5060		B	10A45

Ordering profile components


SEL-AH5060-15A45/90

- ϕ 1.5m 90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

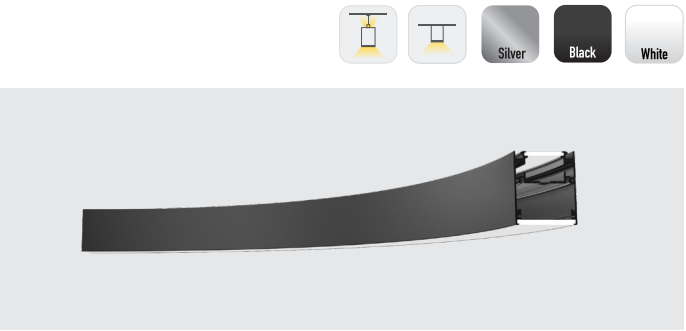


Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

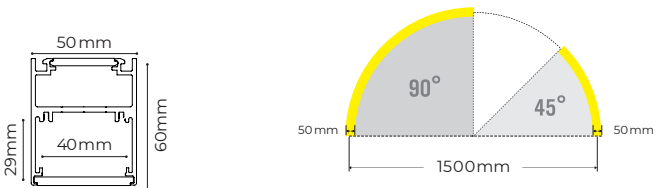

Profile components		
Profile	PR-AH5060-15A45/90 50Å 60,D1500mm,45°/90°	
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm	
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm	
End cap	EC-AH5060 L60Å W50Å H2mm	

Lighting Source							
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-15A45	>80	1300LM/pcs	24V	11.6W/pcs	D1500x45Åx20x5.8mm	84LEDs	14LEDs

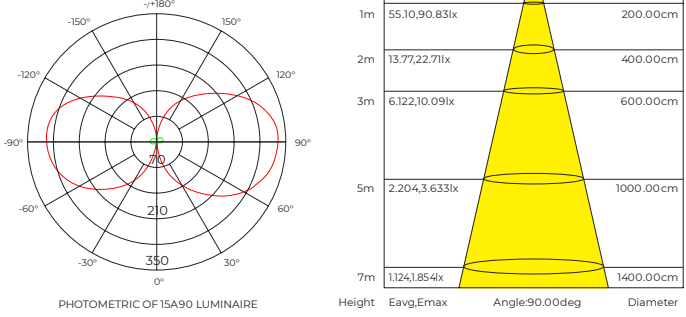

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB 350x20x0.6mm	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5Å 20Å 12mm	
Reflective paper	BG-15 16000Å 26Å 2mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1500mm up-down double lighting 45°
							1500mm up-down double lighting 90°	
		White				W		
		Black				B		
	PR	-		AH	5060		B	15A90

Ordering profile components


SEL-AH5060-30A45

- $\varnothing$ 3m 45° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

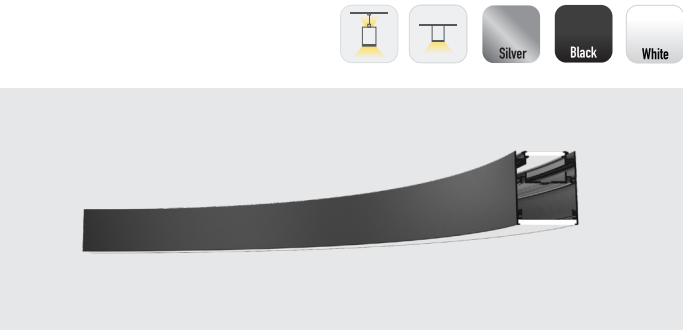

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

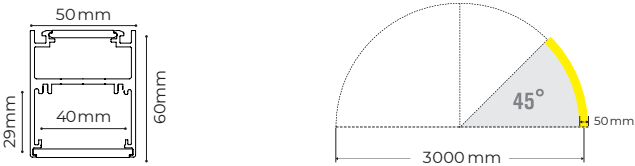

Profile components	
Profile	PR-AH5060-30A45 50Å 60,D3000mm,45Å
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm


Installation Accessories

Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

Interconnection Accessories

Connector	EX-25 39.5X20X12mm
-----------	-----------------------

Lighting Source							
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V- 20mm-30A23	>80	1300LM/ pcs	24V	11.6W/pcs	D3000x22.5Å 20x5.8mm	84LEDs	14LEDs

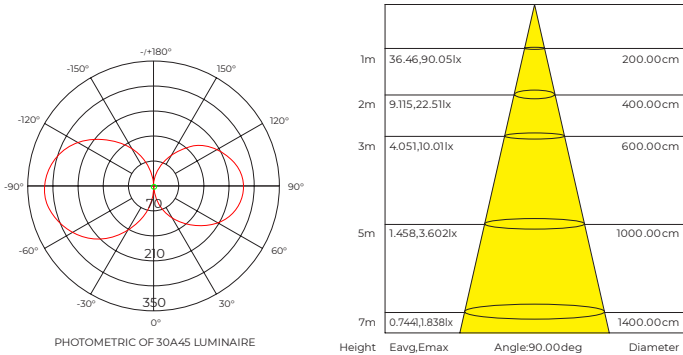


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	3000mm up-down double lighting 45Å
		-				White	W	
		-				Black	B	
	PR	-		AH	5060		B	30A45

Ordering profile components SEL-PR-AH5060B30A45


SEL-AH5060-2500

- 2500m straight line(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

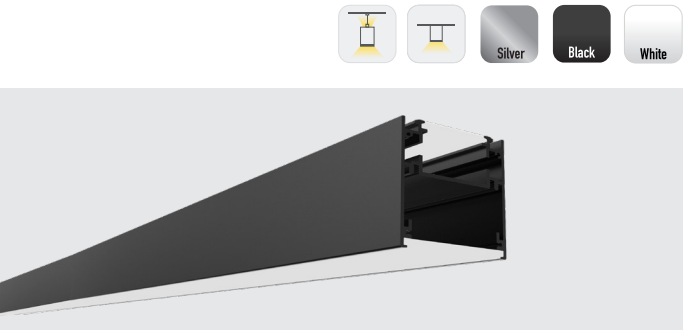

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

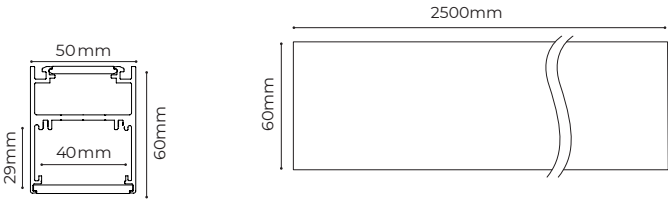

Profile components	
Profile	PR-AH5060 L2500Å W50Å H60mm
50 Diffuser	CV-AH5060-20000 L20000Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm


Installation Accessories

Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Surface Mounted Screw set	CL-15 M3.5x50mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000Å 26Å 2mm

Interconnection Accessories

Connector	EX-25 39.5X20X12mm
"L" type connector	EX-28

Lighting Source							
Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs
Rigid modular							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm	>80	1060LM/pcs	24V	9.6W/pcs	499x20x5.8mm	70LEDs	100mm/14LEDs

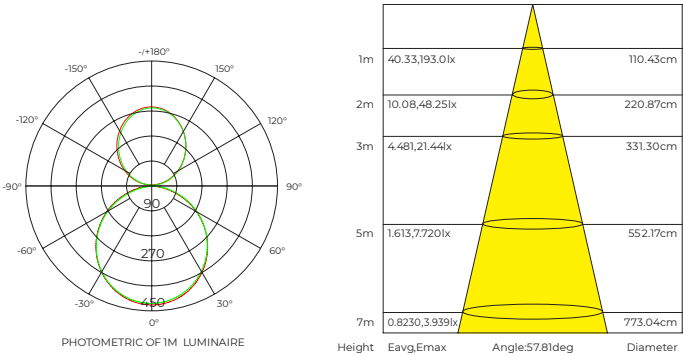


Ordering Code

Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	2500mm
		-				White	W	
		-				Black	B	
	PR	-		AH	5060		B	2500


Ordering profile components SEL-PR-AH5060B2500

SEL-AH5060-15N90

- ϕ1.5m 90° arc(inward-outward double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant

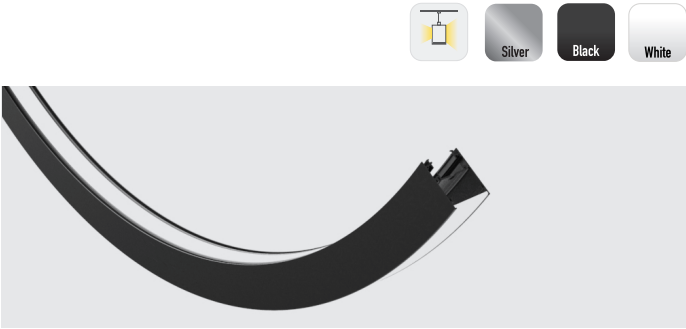


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

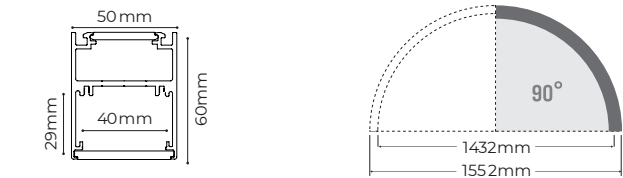

Profile components	
Profile	PR-AH5060-15A45 50Å 60,DI500mm,90ã
50 Diffuser	CV-AH5060-20000 L20000 Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000 Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Lighting Source							
Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8I40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBDB 350x20x0.6mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000 Å 26Å .2mm

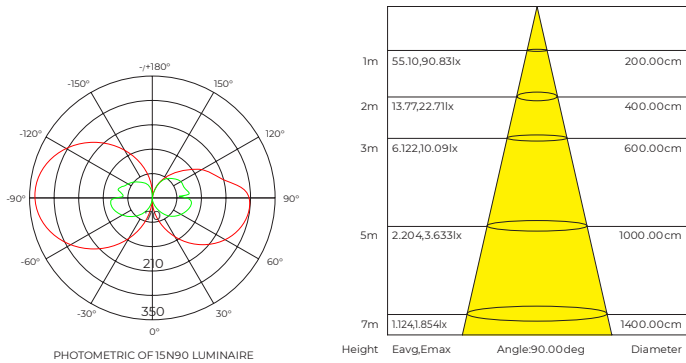


Interconnection Accessories	
Connector	EX-25 39.5X20X12mm

Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1500mm inward-outward double lighting 90°
		White				W		
		Black				B		
		PR	-		AH	5060		B


Ordering profile components

SEL-AH5060-15W90

- ϕ1.5m 90° arc(inward-outward double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant

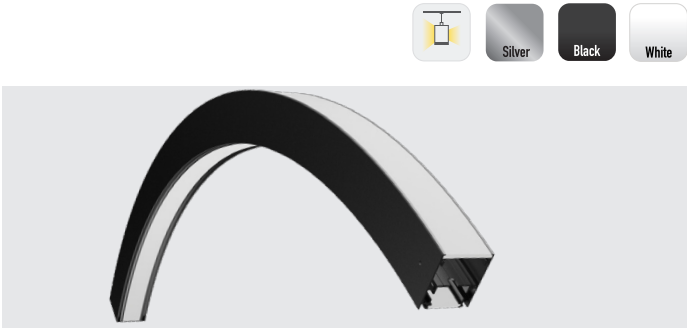


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Spraying ☐
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

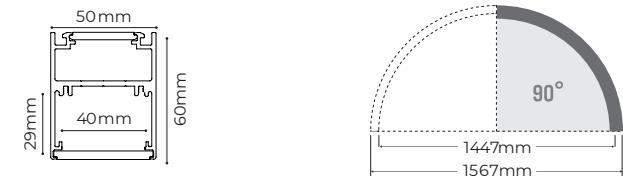

Profile components	
Profile	PR-AH5060-15A90 50Å 60,DI500mm,90ã
50 Diffuser	CV-AH5060-20000 L20000 Å W47Å H4mm
35 Diffuser	CV-AH5060-20000 L20000 Å W32Å H3.5mm
End cap	EC-AH5060 L60Å W50Å H2mm

Lighting Source							
Flexible strip							
Model	CRI	Lumens (4000 K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
D8I40-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories	
Pendant cable	PN-WXX 2m/4m
Pendant cable (wire and line in one)	PN-CXX 2m/4m
Canopy	PY-CBDB 350x20x0.6mm
Clips	CP-29 39.5Å 20Å 12mm
Reflective paper	BG-15 16000 Å 26Å .2mm

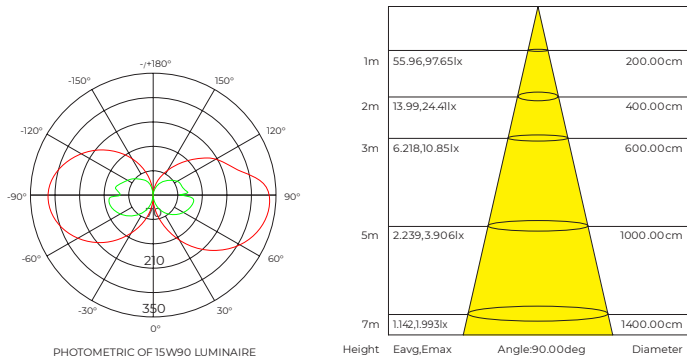

Interconnection Accessories	
Connector	EX-25 39.5X20X12mm


Ordering Code								
Category		-	Series	Section Size		Profile Color		Length
LLS-C	PR	-	Pendant/surface mounted	AH	5060	Silver	S	1500mm inward-outward double lighting 90°
		White				W		
		Black				B		
		PR	-		AH	5060		B

Ordering profile components



SKYLINE

Design principles

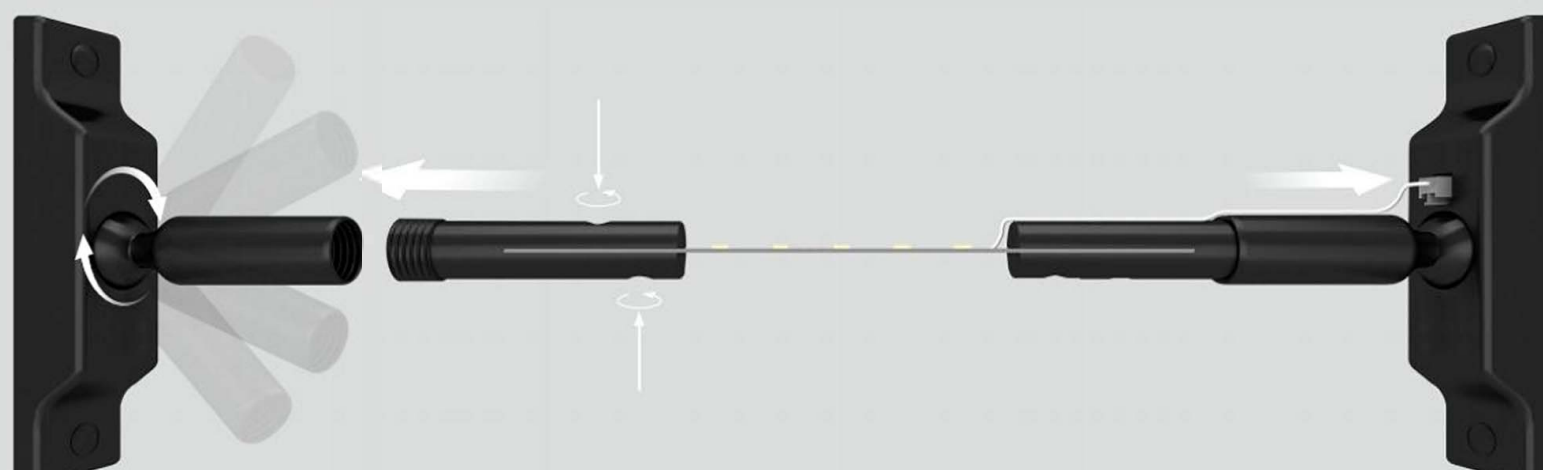

Specification

Indirect Lighting

Direct Lighting

Wall Washing

Brand

VIEW OF US
Worldwide Innovation Brand of Indoor LED Lighting

BRAND POSITIONING
LED Linear Lighting Solution Provider




BRAND STYLE
Concise | Trendy | Innovative

BRAND VALUE
Concentration | Profession | Acme | Innovation | Iteration



CONSIDERATION OF DESIGN
Simplification | User-friendly | Consumption

Production Facility


Wall Washing

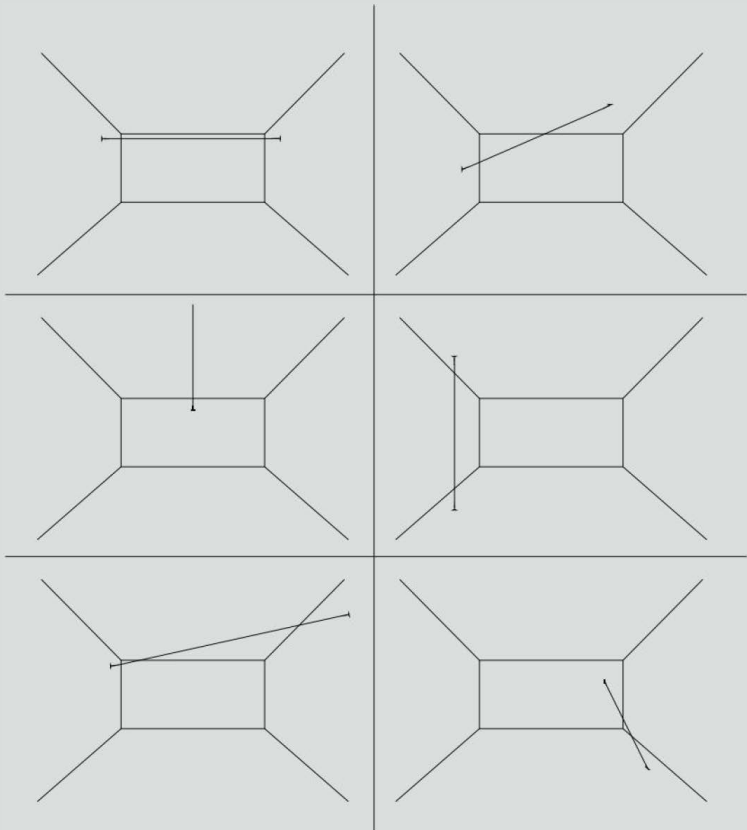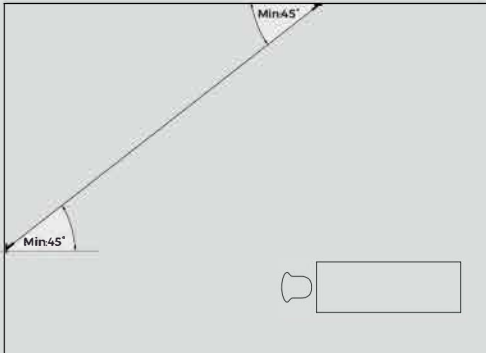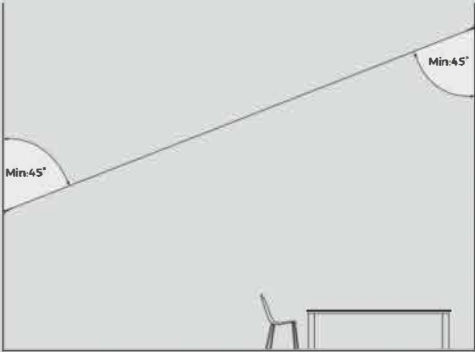






Installation guidelines

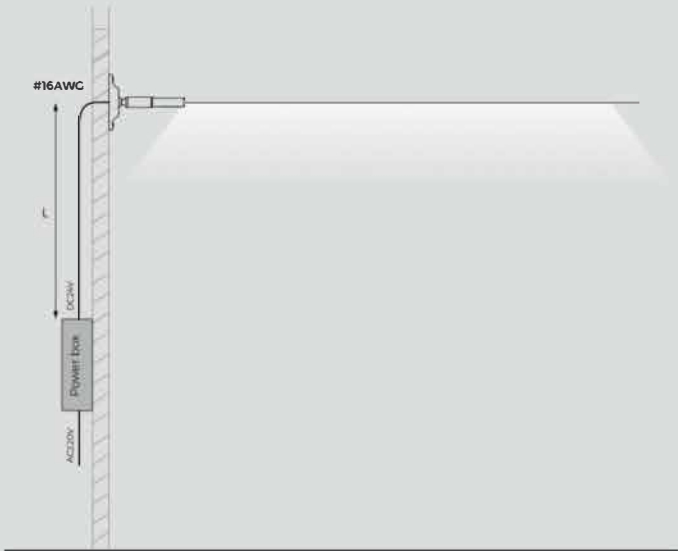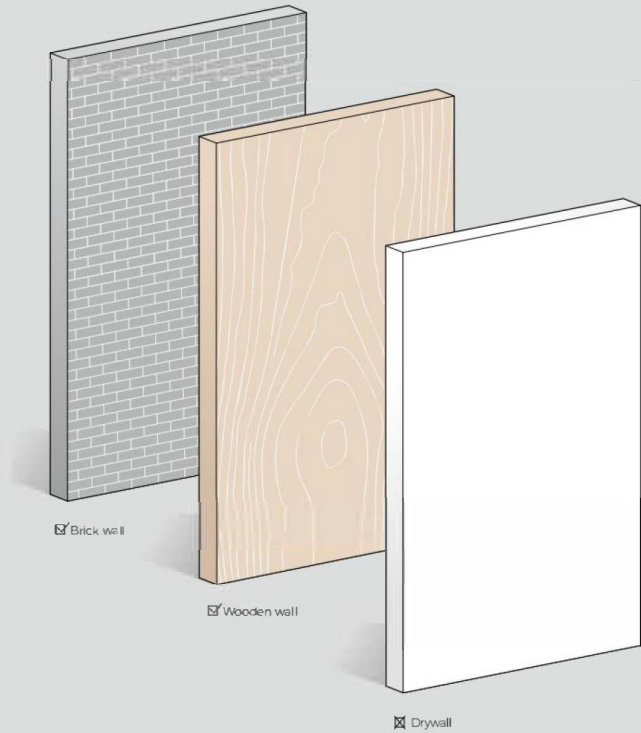


SKY-06A: Lmax=9M; 13.5W/m; DC24V
SKY-06B: Lmax=9M; 10W/m; DC24V
SKY-12C: Lmax=7M; 8.7W/m; DC24V
SKY-20C: Lmax=5M; 8.7W/m; DC24V
SKY-06D: AC220-240V; Driverless
*Please calculate the required power according to the actual length

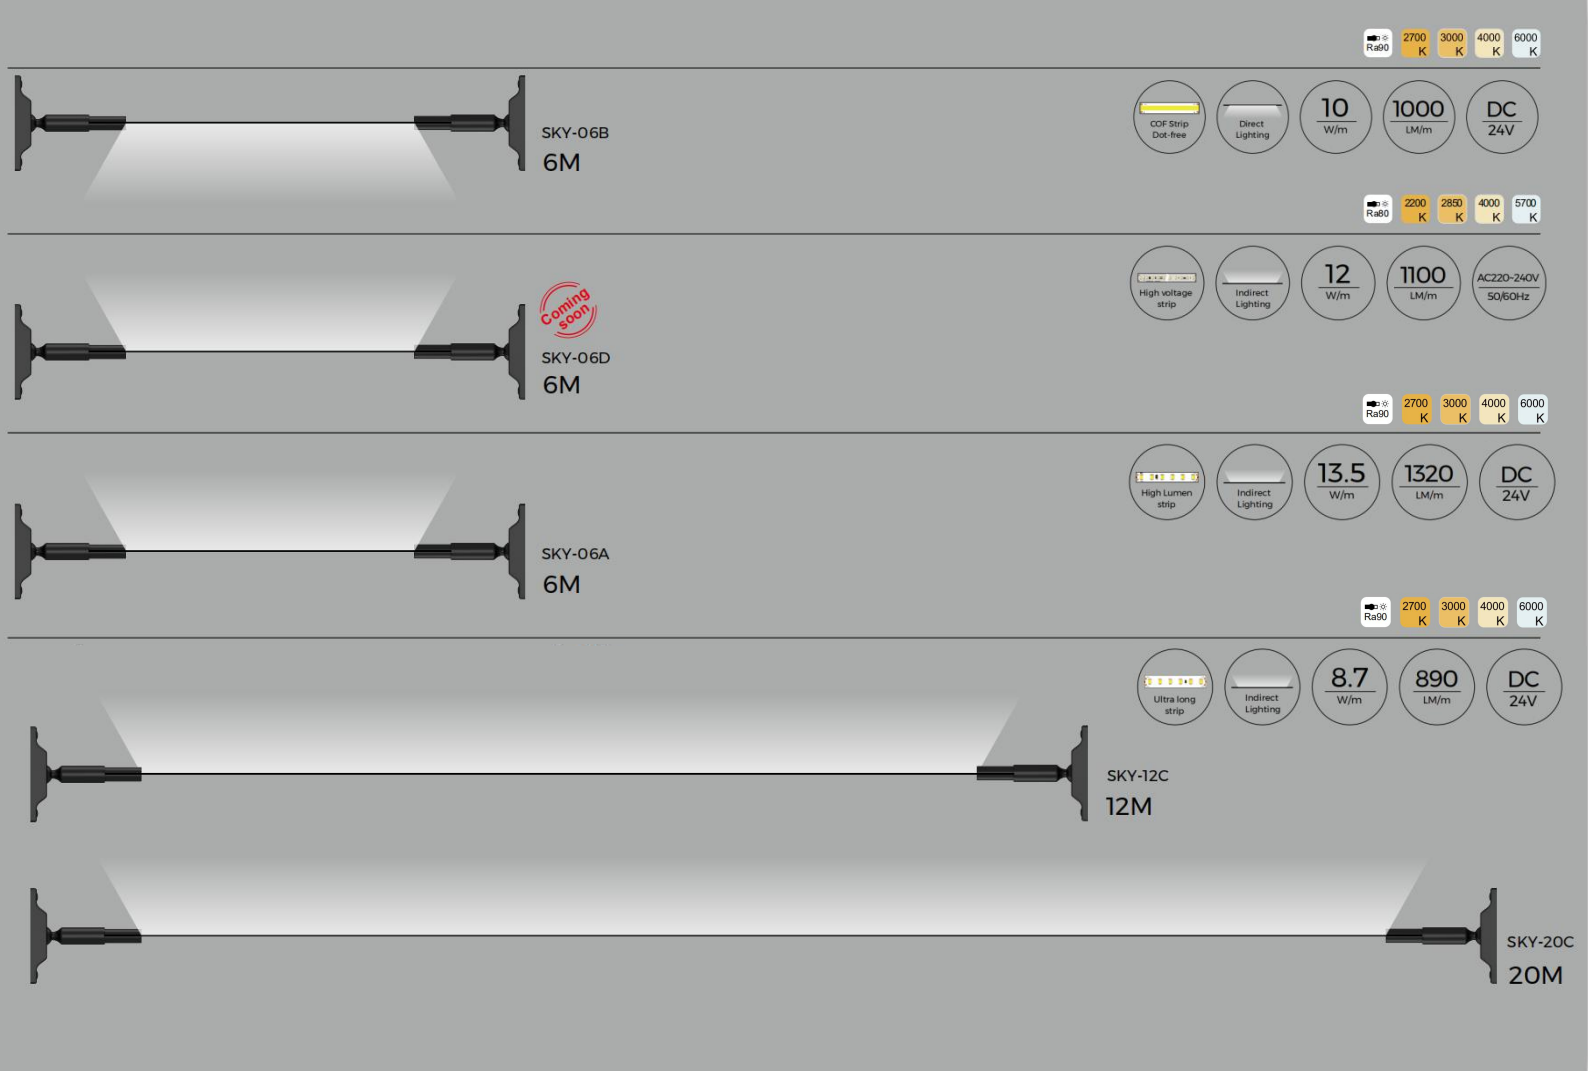

Parameters

Model	SKY-06B	SKY-06D Coming soon	SKY-06A	SKY-12C	SKY-20C
Length	6M	6M	6M	12M	20M
Lighting source					
Cutting Unit	62.5mm	250mm	50mm	50mm	50mm
Input voltage	DC24V	AC220~240V 50/60Hz	DC24V	DC24V	DC24V
CCT					
CRI	>90	>80	>90	>90	>90
Typ. power	10W/m	12W/m	13.5W/m	8.7W/m	8.7W/m
Lumens	1000LM/m	1100LM/m	1320LM/m	890LM/m	890LM/m
Color					

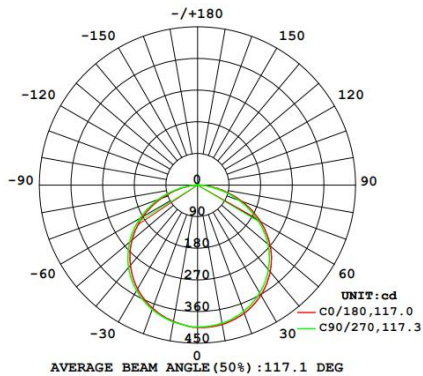


Flux out: 929.7 lm

Height	Havg, Hmax	Angle	Diameter
1m	106.8, 405.51x		326.11cm
2m	26.71, 101.41x		652.22cm
3m	11.87, 45.051x		978.33cm
4m	6.677, 25.341x		1304.43cm
5m	4.274, 16.221x		1630.54cm
6m	2.968, 11.261x		1956.65cm
7m	2.180, 8.2751x		2282.76cm
8m	1.669, 6.3361x		2608.87cm
9m	1.319, 5.0061x		2934.98cm
10m	1.068, 4.0551x		3261.09cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

A

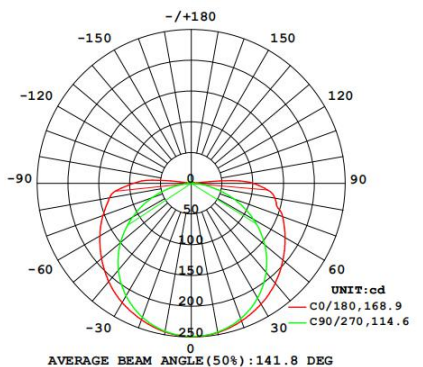


Flux out: 586.0 lm

Height	Havg, Hmax	Angle	Diameter
1m	72.83, 249.11x		311.26cm
2m	18.21, 62.281x		622.52cm
3m	8.092, 27.681x		933.78cm
4m	4.552, 15.571x		1245.04cm
5m	2.913, 9.9651x		1556.30cm
6m	2.023, 6.9201x		1867.56cm
7m	1.486, 5.0841x		2178.82cm
8m	1.138, 3.8931x		2490.08cm
9m	0.8991, 3.0761x		2801.33cm
10m	0.7283, 2.4911x		3112.59cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

B

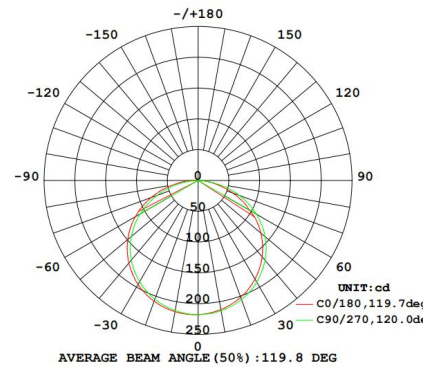


Flux out: 516.7 lm

Height	Havg, Hmax	Angle	Diameter
1m	54.82, 217.91x		344.18cm
2m	13.71, 54.481x		688.36cm
3m	6.091, 24.211x		1032.54cm
5m	2.193, 8.7161x		1720.90cm
7m	1.119, 4.4471x		2409.26cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C

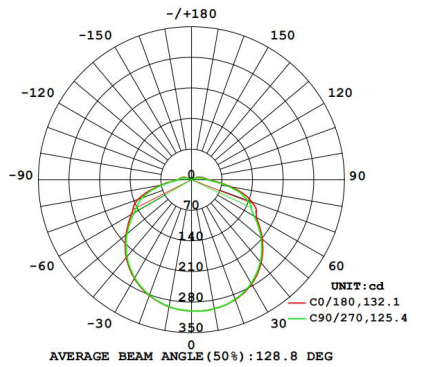

Flux out: 803.9 lm

Height	Havg, Hmax	Angle	Diameter
1m	55.64, 300.91x		417.43cm
2m	13.91, 75.231x		834.86cm
3m	6.182, 33.441x		1252.30cm
4m	3.477, 18.811x		1669.73cm
5m	2.226, 12.041x		2087.16cm
6m	1.546, 8.3591x		2504.59cm
7m	1.135, 6.1411x		2922.03cm
8m	0.8694, 4.7021x		3339.46cm
9m	0.6869, 3.7151x		3756.89cm
10m	0.5564, 3.0091x		4174.32cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

D

Packing



Components	Packaging material	Size(mm)	Type	GW	Content
Single piece	Hat box	352*346*70mm	6m	2kg	1pcs
Whole bundle	Hat box	365*360*295mm	6m	8kg	4pcs
Single piece	Hat box	352*346*70mm	12m	2.52kg	1pcs
Whole bundle	Hat box	365*360*295mm	12m	10.08kg	4pcs
Single piece	Hat box	352*346*70mm	20m	3.15kg	1pcs
Whole bundle	Hat box	365*360*295mm	20m	12.6kg	4pcs

Ordering code

Category			Length		Light Source Type		CRI		CCT		Color	
Skyline	SKY	-	6000mm	06	D8120-24V-8mm	A	>90	9	2200K	22	White	W
			12000mm	12	DF10-24V-8mm	B	>80	8	2700K	27	Black	B
			20000mm	20	DS8120-24V-8mm	C			2850K	28		
					H8104-230V-12mm	D			3000K	30		
									4000K	40		
									5700K	57		
									6000K	60		
SKY	-		06	A		8		40		W		

SEL-SKY-06A840W



Attentions :

- Please install the product in the right environment as much as possible ;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.