


Luminaires

SEL Standard Luminaire, beyond its constant concise appearance design, adopts a more professional solution for light distribution, like wall washing and grazing, and a higher standard of heat dissipation and photoelectric indicators. Thus it can satisfy professional demands of indoor main lighting, accent lighting and special lighting, and be capable of providing a full set of linear lighting solution for office, residential, commercial, and industrial space. When the dimming module get upgraded and smart, it is expected to lead a trend of future livable lighting.

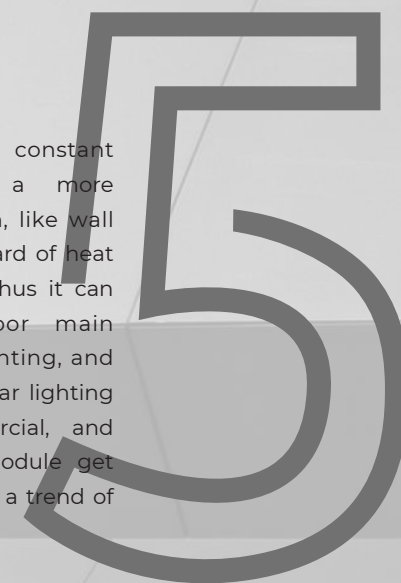


Product Series

Linear luminaires include four series : SLIM Series, GLS40 Series, LINE 60 Series and Circle Series.


SLIM Series

SLIM series, a kind of standard mini-sized linear luminaire, can achieve eight diverse light distribution methods through professional optical design and structural design and thus satisfy demands of professional indoor functional lighting, accent lighting and special lighting.

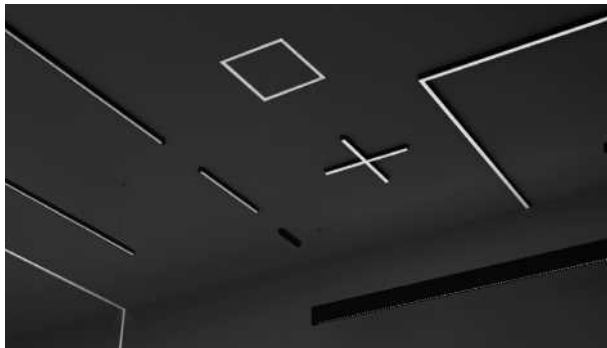

LINE60 Series

SEL "LINE 60 series" adopts professional optical and structure design to realize 6 different light distribution methods. This series can provide professional indoor functional lighting, special lighting. It can meet the requirements of special lighting, diverse style for choice and more personalized design, just to satisfy your ultimate lighting experience.

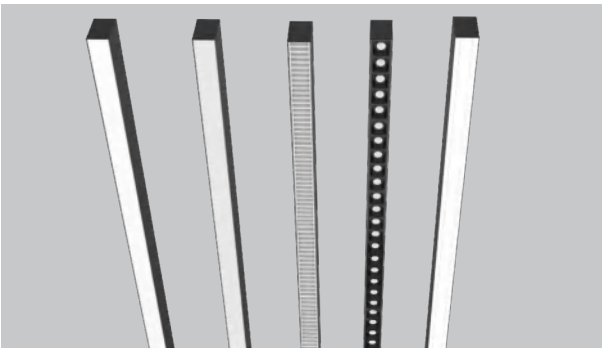

GLS40 Series


GLS40 series adopt modernist design, integrating simplicity and elegance in one. It is meticulously crafted and detail-oriented. The light displays diversity in style for you to choose, and is featured in more individualized intelligence design in the hope of satisfying your ultimate lighting experience.



Circle Series


The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres. There are also multiple mounting methods optional: pendant, recessed, surface mounted and wall mounted, which are all perfectly compatible to the spacial structures of different areas, different rigidity and different materials.










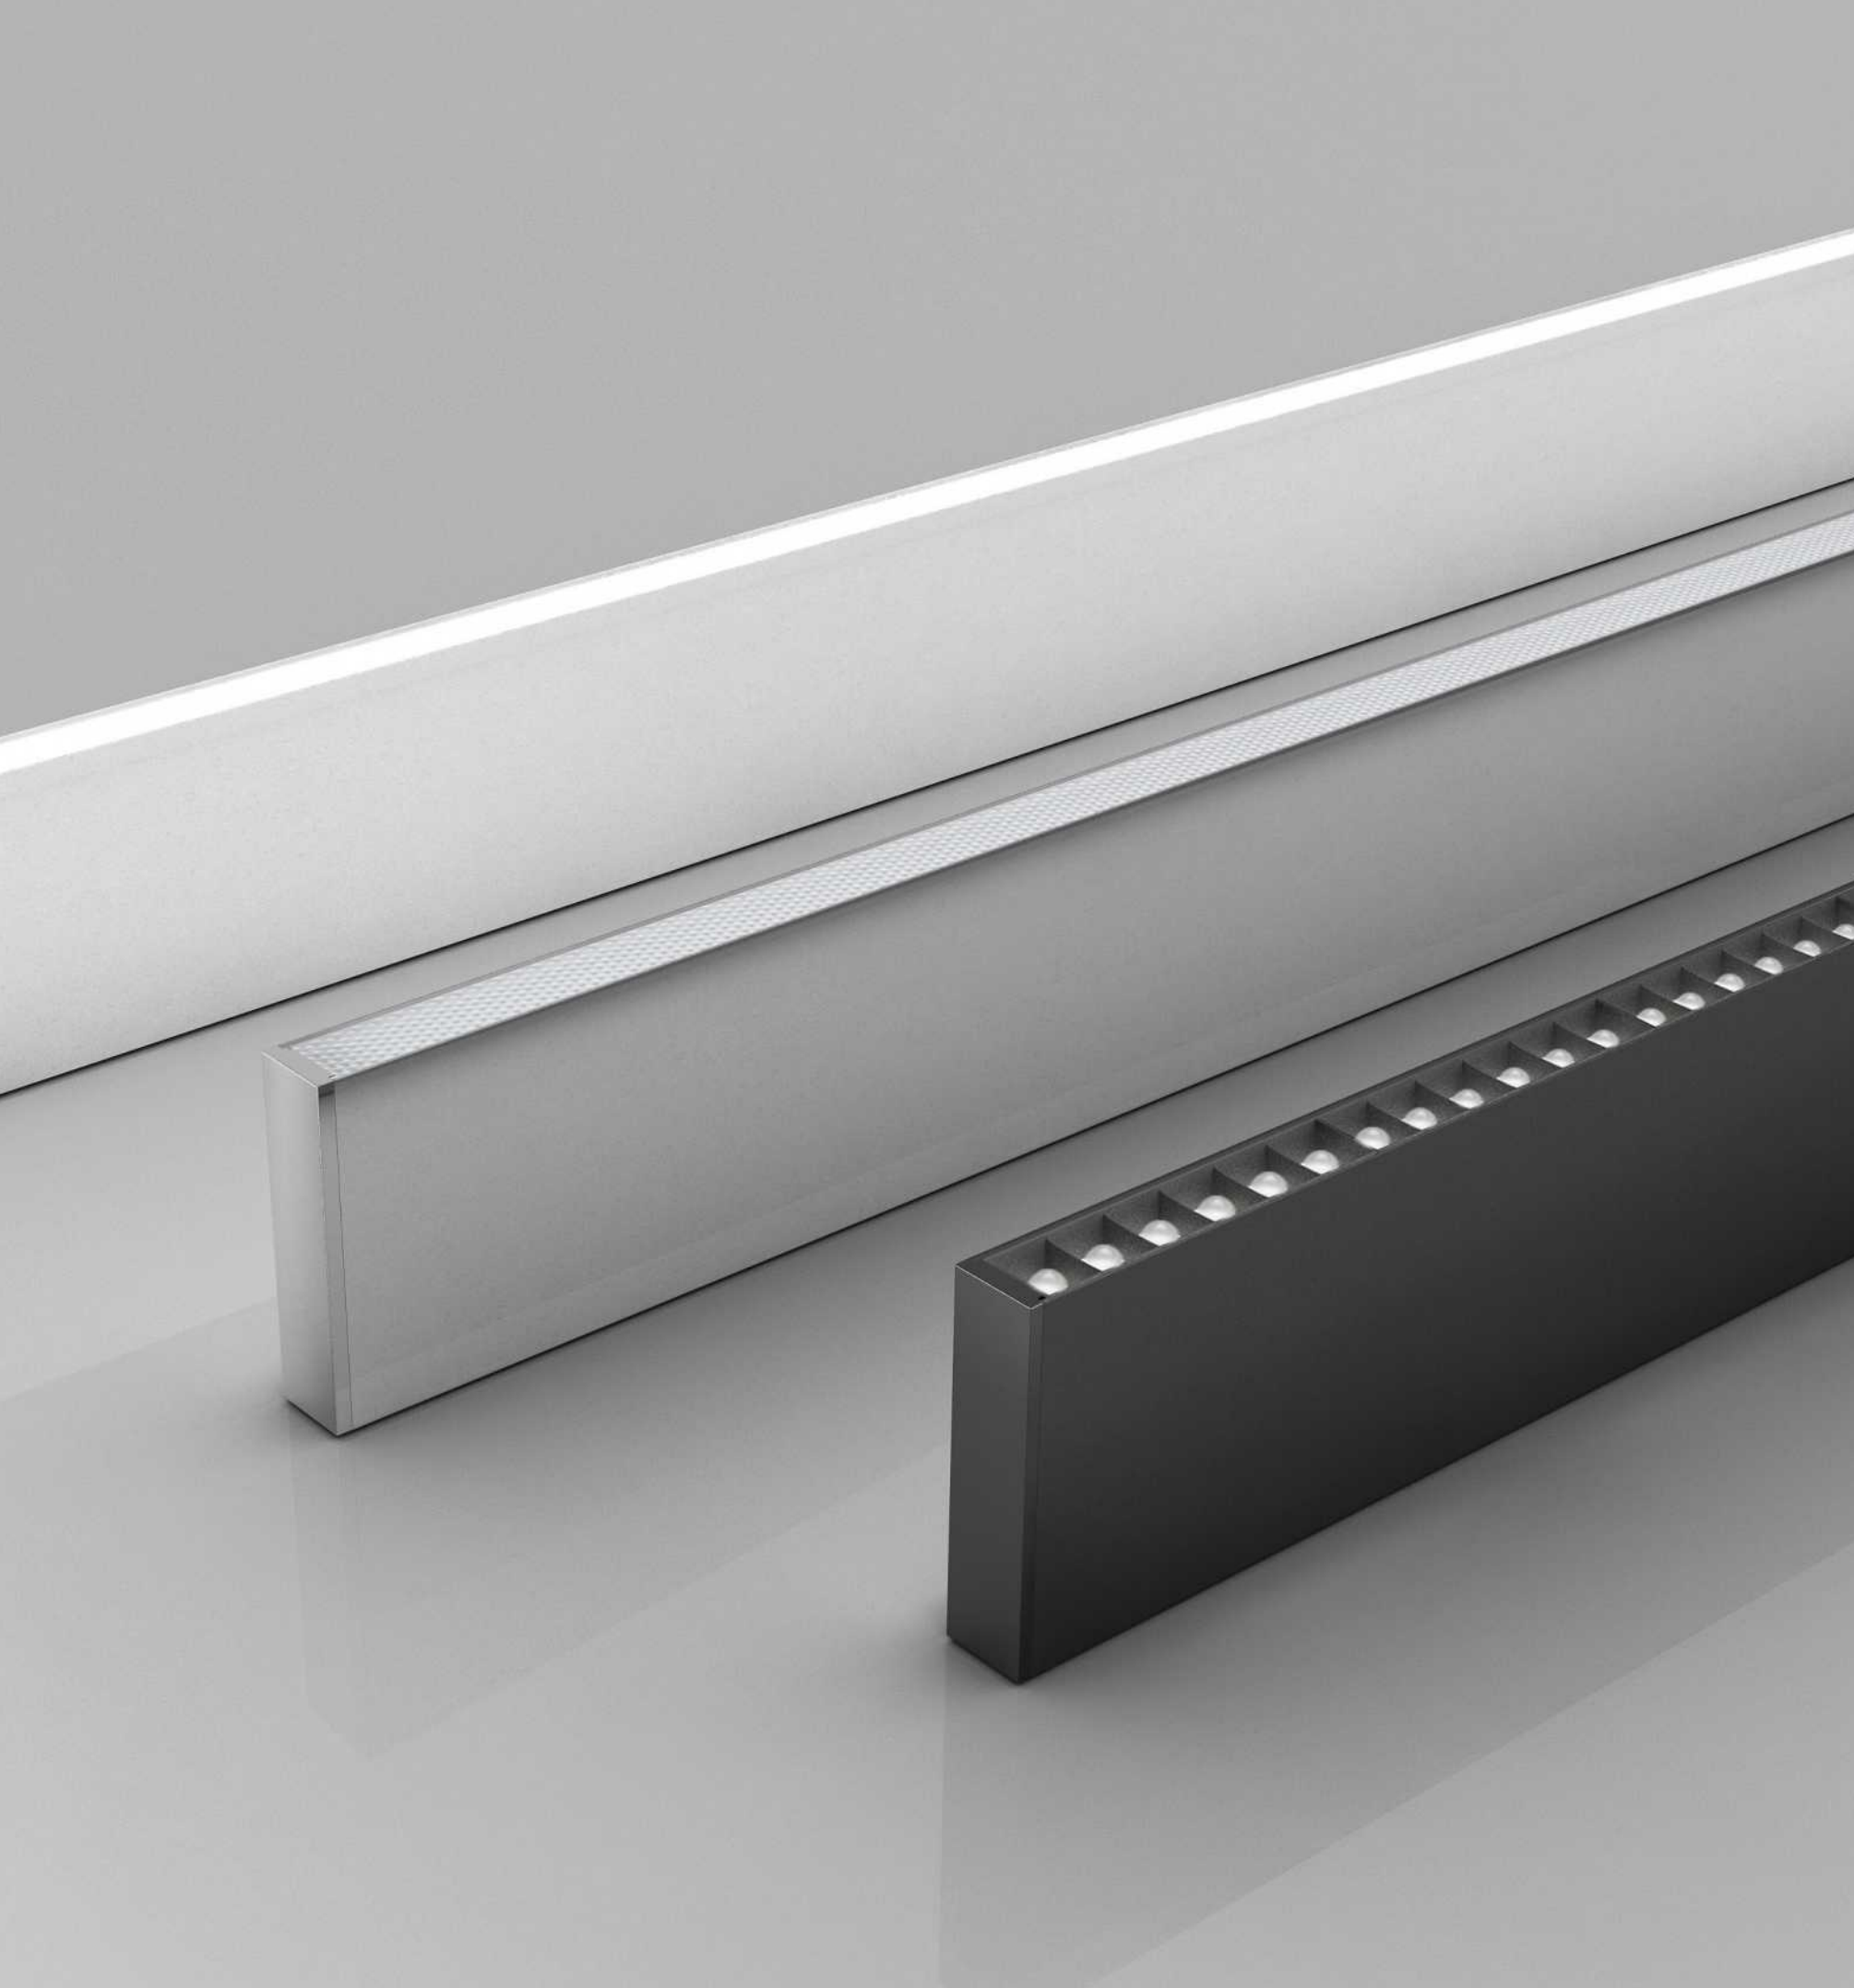

SLIM Series


SLIM series, a kind of standard mini-sized linear luminaire, can achieve eight diverse light distribution methods through professional optical design and structural design and thus satisfy demands of professional indoor functional lighting, accent lighting and special lighting.

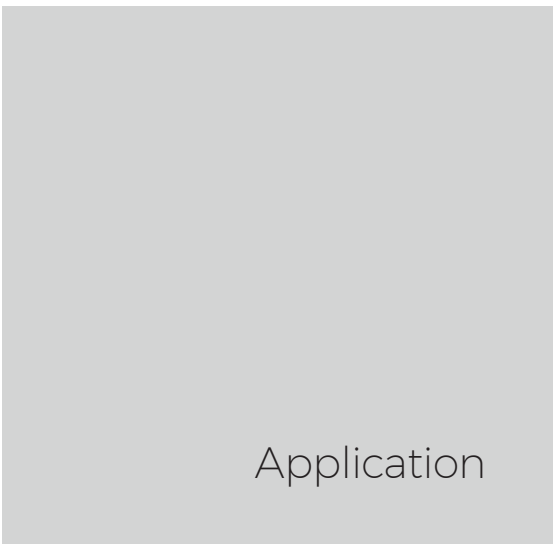

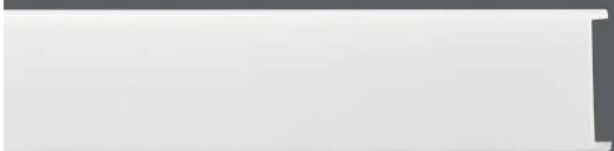	Diffuser		
	Prismatic Diffuser		
	Grating30°		
	Grating 60°		
	Asymmetric		
	Double asymmetric		
	Block frosted diffuser		
	Blind cover		

SEL-LH25 AC 220V
Standard luminaire


- Standard luminaire, with standard ceiling box (constant current power supply included), ready to use upon connection to AC220V.
- Three dimming methods optional: non-dimming, 0-10V dimming, DALI dimming.
- Pendant upward and downward lighting, 25mm light-emitting surface.
- 100LM/W constant current and high luminous efficiency design, luminous flux reaches up to 3800LM/M.
- Multiple light distribution methods (diffuser, prismatic, grating 30°/60°), can satisfy needs of various applications.
- Wire and pendant cable in one, invisible and aesthetic design.



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700K 3000K 4000K 5000K 6500K		
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

	1200mm	1500mm	1800mm	2400mm
Diffuser	Up: 19W/1700LM Down: 19W/1900LM	Up: 23W/ 2100LM Down: 23W/2300LM	Up: 28W/2600LM Down: 28W/2800LM	Up: 38W/3600LM Down: 38W/3800LM
Prismatic	Up: 19W/1700LM Down: 19W/1900LM	Up: 23W/ 2100LM Down: 23W/2300LM	Up: 28W/2600LM Down: 28W/2800LM	Up: 38W/3600LM Down: 38W/3800LM
Grating 30°	Up: 19W/ 1570LM Down: 19W/ 1310LM	Up: 23W/1900LM Down: 23W/1590LM	Up: 28W/2200LM Down: 28W/1930LM	Up: 38W/ 3150LM Down: 38W/2620LM
Grating 60°	Up: 19W/ 1570LM Down: 19W/1080LM	Up: 23W/1900LM Down: 23W/1330LM	Up: 28W/2200LM Down: 28W/1590LM	Up: 38W/ 3150LM Down: 38W/2150LM

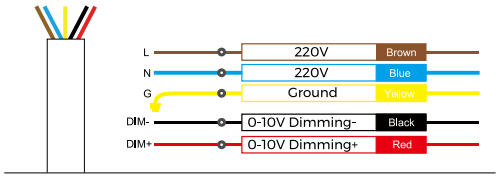

Ordering Code


Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type
LLS	-	Pendant Upward and downward lighting	25	Flat	F	Diffuser D	NO Carrier X Silver S	Holeless end cap S	1200mm	/	Constant current rigid T module	38W	38	2700K	SW	>80	8	Non-dimming 0-10V Dimming DALI Dimming
				Grating	G	Prismatic P	White W		1500mm	(A)		46W	46	3000K	WW	>90	9	
						30° F	Black B		1800mm			54W	54	4000K	NW			
						60° H			2400mm			76W	76	5000K	DW			
													6500K	W				
LLS	-	LH	25	F	D	X	S	S	2400	-	T	76	NW	8	B	-	D	L

Ordering luminaires kits LLS-LH25FDXSS2400-T76NW8B-DL



SEL - LS25 AC 220V
Standard luminaire

- Standard luminaire, with standard ceiling box (constant current power supply included), ready to use upon connection to AC220V.
- Three dimming methods optional: non-dimming, 0-10V dimming, DALI dimming.
- 25mm light-emitting surface.
- 100LM/W constant current and high luminous efficiency design, luminous flux reaches up to 1700LM/M.
- Multiple light distribution methods (diffuser, prismatic, grating 30°/60°, Block frosted diffuser), can satisfy needs of various applications.
- Wire and pendant cable in one, invisible and aesthetic design.



Basic Parameters


Profile material AL6063-T5

Surface processing Spraying RAL9003, Spraying RAL9005, Anodizing

CCT 2700K, 3000K, 4000K, 5000K, 6500K

CRI Ra80/Ra90* (*only for 2700K/3000K)

		1200mm	1500mm	1800mm	2400mm
Diffuser	[Icon]	20W/2000LM	29W/2500LM	38W/3000LM	46W/4000LM
Prismatic	[Icon]	20W/2000LM	29W/2500LM	38W/3000LM	46W/4000LM
Grating 30°	[Icon]	20W/1660LM	29W/2070LM	38W/2480LM	46W/3310LM
Grating 60°	[Icon]	20W/1360LM	29W/1700LM	38W/2030LM	46W/2720LM
Block frosted diffuser	[Icon]	20W/1830LM	29W/2290LM	38W/2750LM	46W/3660LM

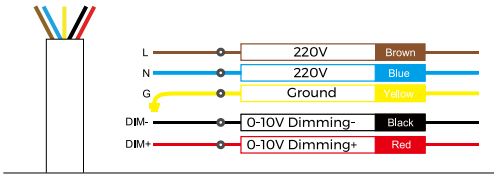


Ordering Code																																
Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Pendant	LS	25	Flat	F	Diffuser D	NO Carrier	X	Silver	S	Holeless end cap	S	1200mm	/	-	Constant Current Rigid	T	20W	20	2700K	SW	>80	8	Non-dimming	N	-	SEL	D	SEL	L	
					Grating	G	Prismatic P	Carrier	F	White	W				1500mm	(A)				29W	29	3000K	VW	>90	9	0-10V Dimming	B		individual		Customized	S
					Square	K	30°	F			Black	B			1800mm						38W	38	4000K	NW			DAI Dimming	A				
							60°	H							2400mm							46W	46	5000K	DW							
																								6500K	W							
LLS	-		LS	25		F	D		X	S		S	2400	-		T		46		LW		8		B	-		D			L		

Ordering luminaires kits LLS-LS25FDXSS2400-T46NW8B-DL



Standard luminaire

-

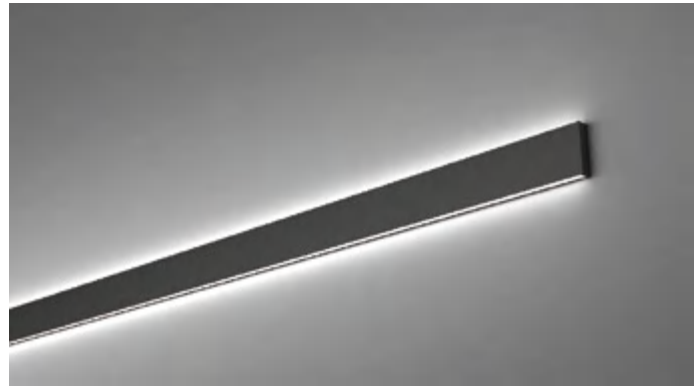

Profile material AL6063-T5

CCT


CRI Ra80/Ra90* (*only for 2700K/3000K)

Diagram illustrating the wiring connections for a 3-core cable (7 conductors) to a lighting fixture:

- L (Line):** Connected to the 220V terminal (Brown).
- N (Neutral):** Connected to the 220V terminal (Blue).
- G (Ground):** Connected to the Ground terminal (Yellow).
- DIM- (Dimming-):** Connected to the 0-10V Dimming- terminal (Black).
- DIM+ (Dimming+):** Connected to the 0-10V Dimming+ terminal (Red).

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	Version	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Wall mounted Lighting upward& downward	LC	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	/	-	Constant Current Rigid	T	14W	14	2700K	SW	>80	8	Non-dimming	N	-	SEL individual	D	SEL	L
											White	W			1200mm	(A)				28W	28	3000K	VW	>90	9	0-10V Dimming	B			Customized	S	
											Black	B			1500mm					39W	39	4000K	NW			DALI Dimming	A					
															1800mm					46W	46	5000K	DW									
															2400mm					58W	58	6500K	W									
LLS	-		LC	25		F		D		X		S		S	2400	-		T		58		LW		8		B	-		D			



Ordering luminaires kits **LLS-LC25FDXSS2400-T58NW8B-DL**

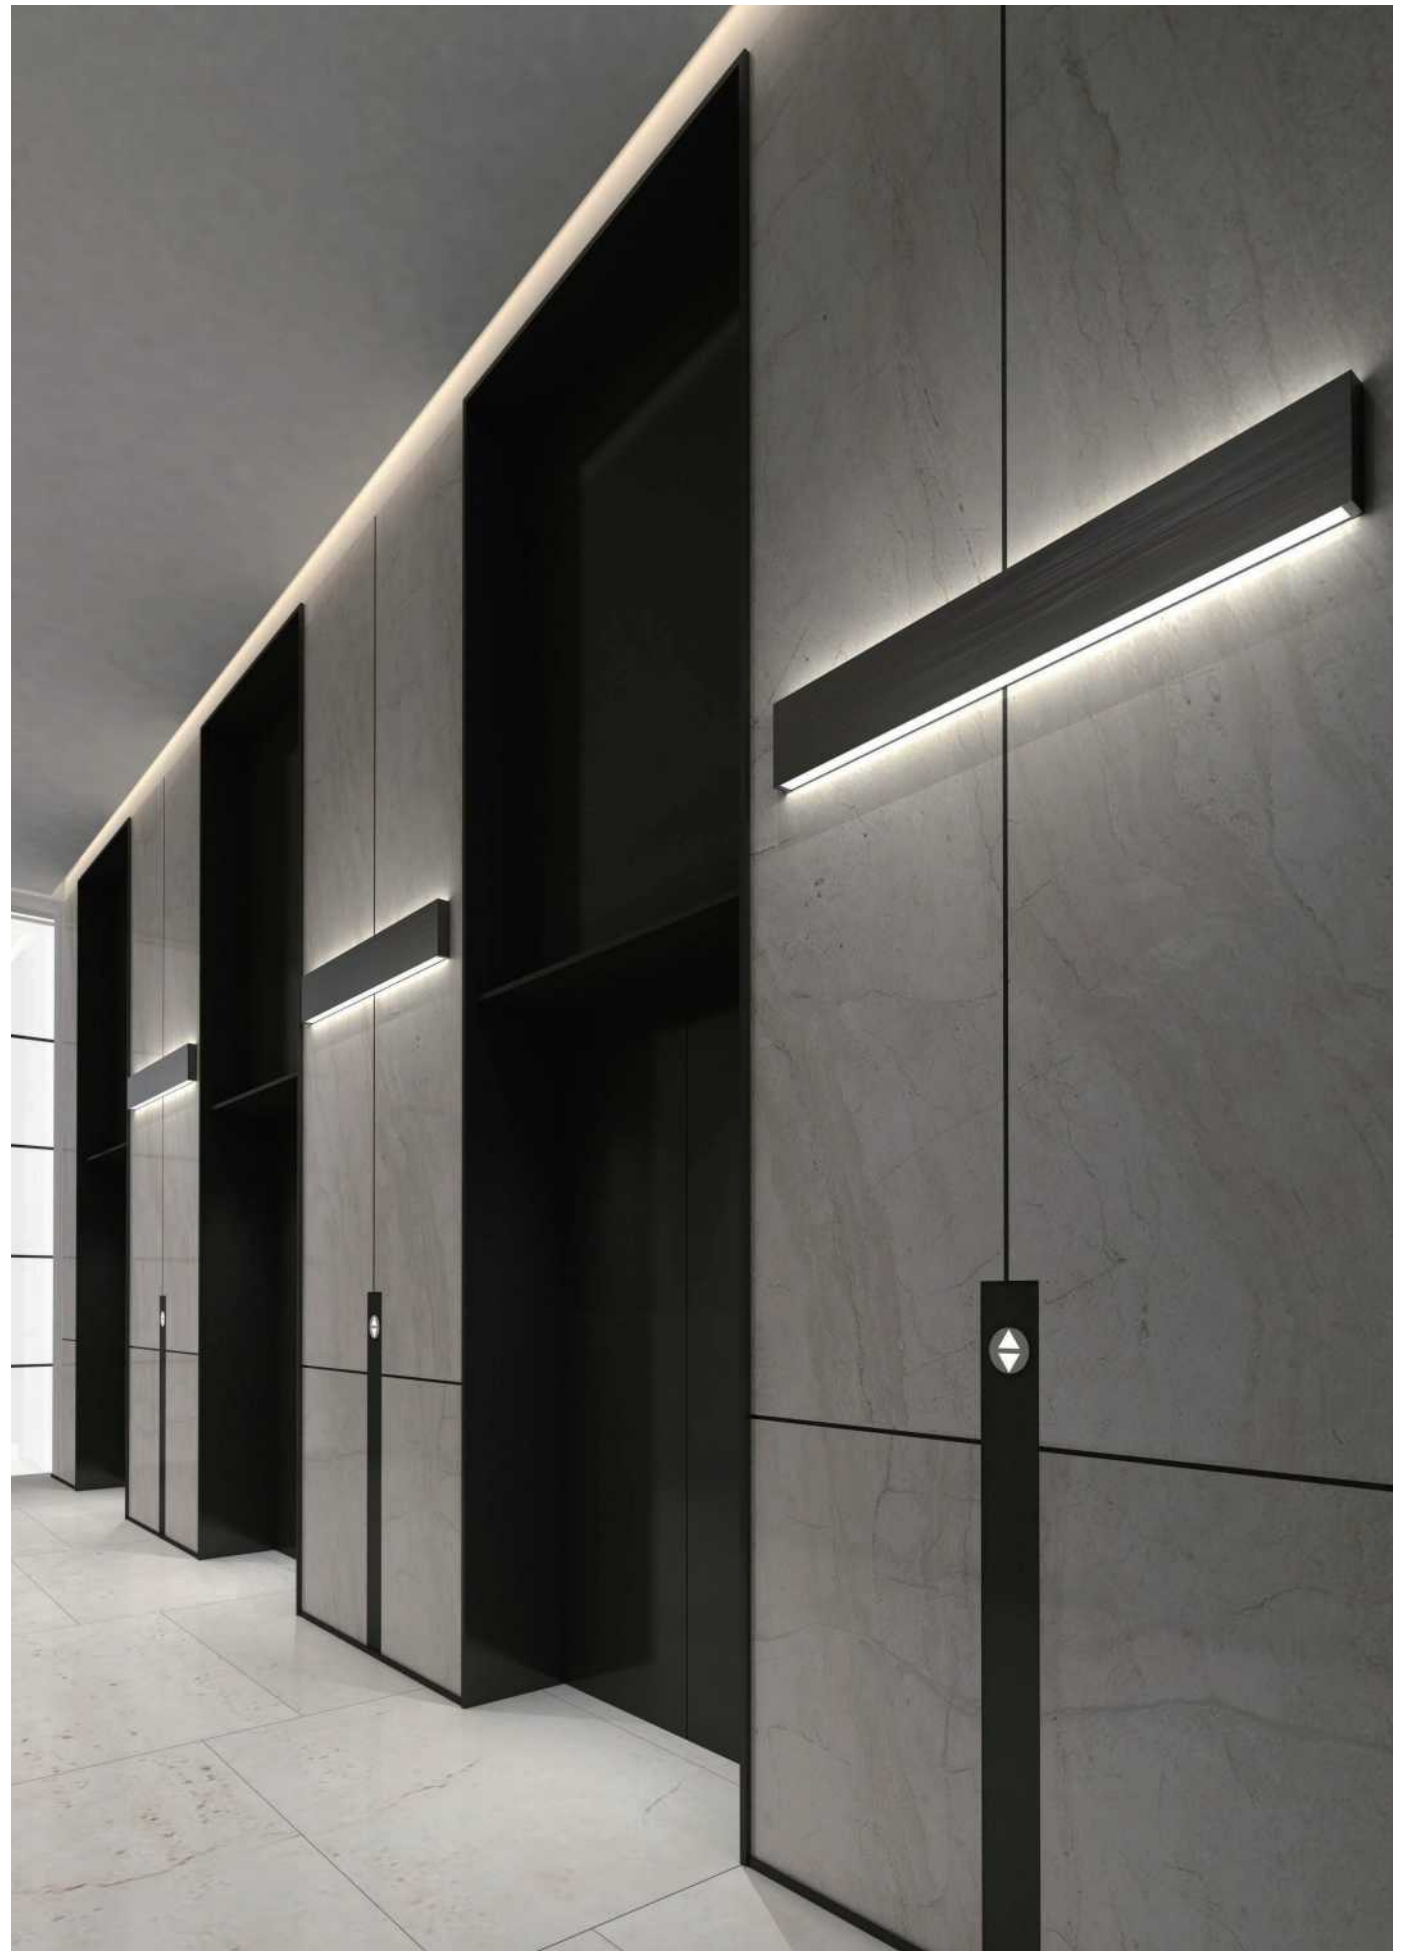

SEL-LH25

DC 24V

- Pendant upward and downward lighting, 25mm light-emitting surface.
- 105LM/W constant current and high luminous efficiency design, luminous flux reaches up to 4200LM/M.
- Multiple standard corner (L type , X type , T type optional) , can achieve free splicing.
- Multiple light distribution methods (diffuser, prismatic, grating 30°/60°), can satisfy needs of various applications.
- Wire and pendant cable in one, invisible and aesthetic design.

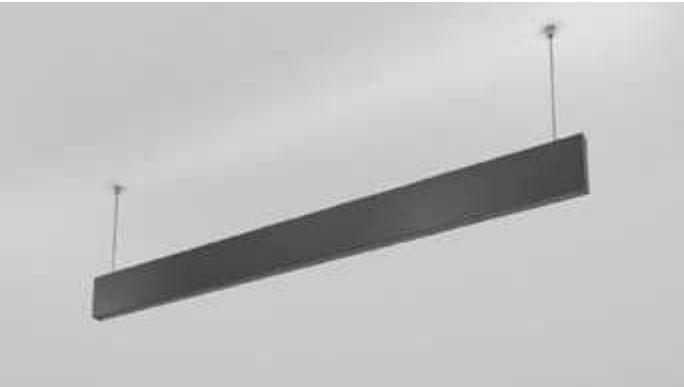

Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003		
	Spraying RAL9005	Anodizing	
CCT	2700K	3000K	4000K
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
Prismatic	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
Square Grating 30°	Up: 12W/950LM Down: 12W/850LM	Up: 24W/1900LM Down: 24W/1700LM	Up: 30W/2400LM Down: 30W/2100LM	Up: 36W/2900LM Down: 36W/2500LM	Up: 48W/3850LM Down: 48W/3500LM	/	/	/
Square Grating 60°	Up: 12W/950LM Down: 12W/700LM	Up: 24W/1900LM Down: 24W/1400LM	Up: 30W/2400LM Down: 30W/1800LM	Up: 36W/2900LM Down: 36W/2300LM	Up: 48W/3850LM Down: 48W/3100LM	/	/	/
Round Grating 30/55°	Up: 11W/870LM Down: 11W/850LM	Up: 22W/1740LM Down: 22W/1700LM	Up: 28W/2220LM Down: 28W/2125LM	Up: 33W/2610LM Down: 33W/2550LM	Up: 44W/3480LM Down: 44W/3400LM	/	/	/
Blind cover	/	/	/	/	/	Available	Available	Available

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
LLS	-	Pendant Upward and downward lighting	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	/	-	24VDC flexible strip	F	40W/m	40	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L
					Grating	G	Prismatic	P			White	W			1200mm	(A)	-	24VDC Rigid module	R				3000K	WW	>90	9			individual	Customized	S	
							30°	F			Black	B			1500mm								4000K	NW								
							60°	H							1800mm								5000K	DW								
															2400mm									6500K	W							
LLS	-		LH	25	F		D	X	S	S	2400	-	F	40	NW	8	X	-	D	L												

Ordering luminaires kits

LLS-LH25FDXSS2400-F40NW8X-D L




□ Diffuser/Prismatic ▨ Grating 30°/60° ■ Blind cover


Standard length

600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)



Corners


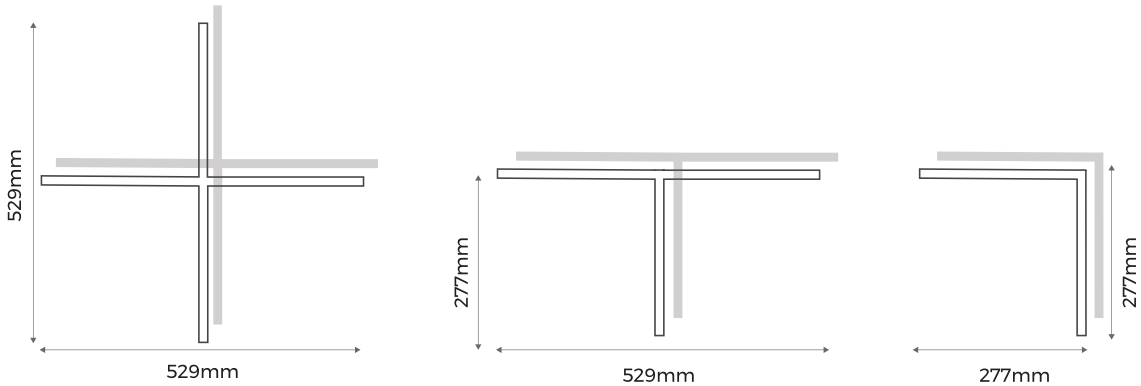


SEL-LS25

DC 24V



- 25mm light-emitting surface.
- 105LM/W constant current and high luminous efficiency design, luminous flux reaches up to 2100LM/M.
- Multiple standard corner (L type , X type , T type optional), can achieve free splicing.
- Multiple light distribution options (Diffuser, Prismatic Diffuser Grating 30° , Grating 60° , Block frosted diffuser) to meet a variety of application requirements.
- Wire and pendant cable in one, invisible and aesthetic design.

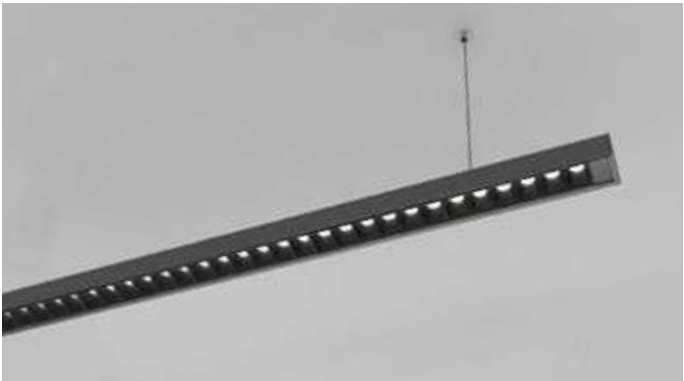

Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700K 3000K 4000K 5000K 6500K		
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

		600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Prismatic		12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Square Grating 30°		12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM	/	/	/
Square Grating 60°		12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM	/	/	/
Round Grating 30/55°		11W/850LM	22W/1700LM	28W/2125LM	33W/2550LM	44W/3400LM	/	/	/
Block frosted diffuser		12W/1200LM	24W/2400LM	30W/3000LM	36W/3600LM	48W/4800LM	/	/	/
Blind cover		/	/	/	/	/	Available	Available	Available

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Pendant	LS	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L
					Grating	G	Prismatic	P	Carrier	F	White	W		1200mm	(A)		24VDC Rigid module	R				3000K	WW	>90	9			individual		Customized	S	
					Square	K	30°	F		Black	B		1500mm								4000K	NW										
													1800mm									5000K	DW									
													2400mm									6500K	W									
LLS	-		LS	25		F	D		X	S		S	2400	-			F		20		NW		8		X	-			D		L	

Ordering luminaires kits

LLS-LS25FDXSS2400-F20NW8X-D L



Diffuser/Prismatic/Block frosted diffuser


Grating 30°/60°

Blind cover


Standard length

600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm
600mm			
1200mm			
1500mm			
1800mm			
2400mm			


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)





Corners

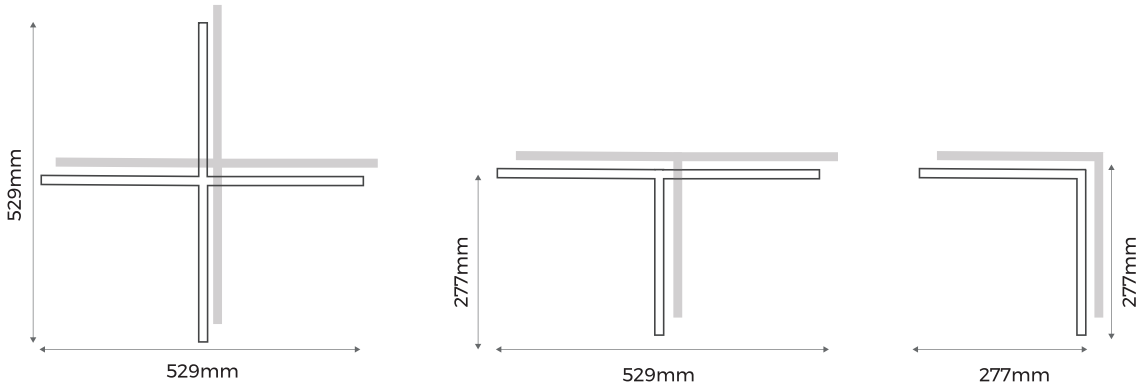

SEL-LM25

DC 24V

- 25mm light-emitting surface.
- 125LM/W constant current and high luminous efficiency design, luminous flux reaches up to 2300LM/M.
- Multiple standard corner (L type , X type , T type optional), can achieve free splicing.
- Multiple light distribution options (Diffuser, Prismatic Diffuse Grating 30°, Grating 60°, Block frosted diffuser) to meet a variety of application requirements.
- Provide surface mounted buckle, more convenient for installation.

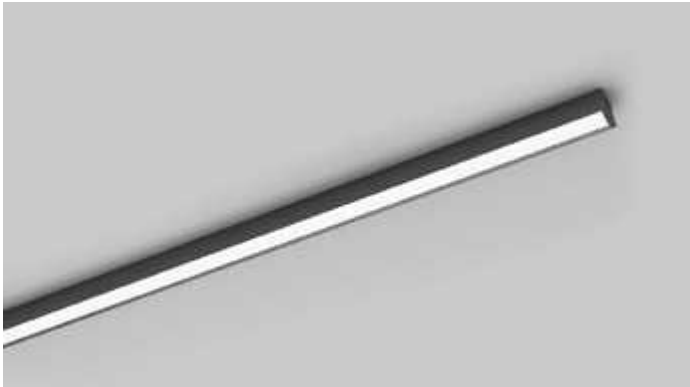

Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700K 3000K 4000K 5000K 6500K		
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

		190mm	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Prismatic		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Square Grating 30°		4W/300LM	12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM	/	/	/
Square Grating 60°		4W/250LM	12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM	/	/	/
Round Grating 30/55°		5W/425lm	11W/850LM	22W/1700LM	28W/2125LM	33W/2550LM	44W/3400LM	/	/	/
Block frosted diffuser		/	12W/1200LM	24W/2400LM	30W/3000LM	36W/3600LM	48W/4800LM	/	/	/
Asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM	/	/	/
Double asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM	/	/	/
Blind cover		/	/	/	/	/	/	Available	Available	Available

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style			Profile Color		End Cap Style	Length	Version	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	Surface mounted	LM	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	190mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L
					Grating	G	Prismatic	P	Flat	X	White	W	600mm	(A)	24VDC Rigid module	R	3000K	WW	>90	9	individual	Customized	S									
					Square	K	30°	F			Black	B	1200mm		4000K	NW																
					Lens	L	60°	H					1500mm		5000K	DW																
							Asym-metric	A					1800mm		6500K	W																
						Double Asym-metric	S							2400mm																		
LLS	-		LM	25		F	D		X	S		S	2400	-			F		20		NW		8		X	-		D		L		

Ordering luminaires kits

LLS-LM25FDXSS2400-F20NW8X-DL



- ☐ Diffuser/Prismatic
- Grating 30°/60°
- Asymmetric / Double asymmetric
- ☐ Block frosted diffuser
- Blind cover

Standard length		
600mm		2400mm
1200mm		1800mm
1500mm		1500mm
1800mm		1200mm
2400mm		600mm
		190mm
600mm		2400mm
1200mm		1800mm
1500mm		1500mm
1800mm		1200mm
2400mm		600mm
		190mm

Customized length (2400mm ~ 5000mm)	


Ultra long connection (> 5000mm)	

Corners		
529mm	529mm	277mm
		277mm

SEL-LE25

DC 24V

- 25mm slender lighting surface .
- 125 Lm/w high light efficiency design , lumen output up to 2300 Lm/m .
- Multiple light distribution options (Diffuser , Microprism , Grating 30° , Grating 60° , Asymmetric , Double Asymmetric) to meet variety application requirements .
- Butterfly clip design , more convenient installation .



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700 3000 4000 5000 6500 K K K K K		
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

		190mm	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Prismatic		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Square Grating 30°		4W/300LM	12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM	/	/	/
Square Grating 60°		4W/250LM	12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM	/	/	/
Round Grating 30/55°		5W/425lm	11W/850LM	22W/1700LM	28W/2125LM	33W/2550LM	44W/3400LM	/	/	/
Asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM	/	/	/
Double asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM	/	/	/
Blind cover		/	/	/	/	/	/	Available	Available	Available

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Recessed	LE	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	190mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L	
					Grating	G	Prismatic	P	Flat	F	White	W	600mm	(A)	-	24VDC Rigid module	R			3000K	WW	>90	9						individual	Customized	S	
					Lens	L	30°	F		Black	B	1200mm				4000K	NW															
							60°	H					1500mm				5000K	DW														
							Asymmmetric	A					1800mm				6500K	W														
		Double Asymmmetric	S					2400mm																								
LLS	-		LE	25	F	D		X	S		S	2400	-		F	20		NW	8		X	-		D		L						

Ordering Luminaires kits

LLS-LE25FDXSS2400-F20NW8X-D L



☐ Diffuser/Prismatic/Asymmetric/Blind cover


☒ Grating 30°/60°

☒ Round Grating30/55°


Standard length

200mm			2400mm
Opening size:211*27mm		Opening size:2406*27mm	
600mm			1800mm
Opening size:611*27mm		Opening size:1732*27mm	
1200mm			1500mm
Opening size:1211*27mm		Opening size:1445*27mm	
1500mm			1200mm
Opening size:1511*27mm		Opening size:1157*27mm	
1800mm			600mm
Opening size:1811*27mm		Opening size:583*27mm	
2400mm			190mm
Opening size:2411*27mm		Opening size:199*27mm	
220mm			
Opening size:223*27mm			
550mm			
Opening size:546*27mm			
1100mm			
Opening size:1085*27mm			
1600mm			
Opening size:1623*27mm			
2200mm			
Opening size:2162*27mm			


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)




Corners

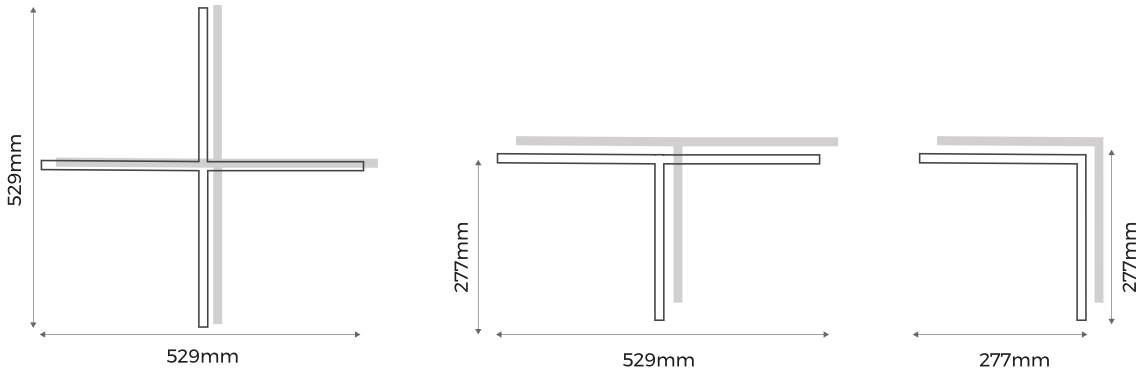

SEL-LR25 DC 24V



- 25mm light-emitting surface.
- 125LM/W constant current and high luminous efficiency design, luminous flux reaches up to 2500LM/M.
- Multiple light distribution methods (diffuser, prismatic, grating 30°/60°, asymmetric, Black diffuser), can satisfy needs of various applications.
- Trimless embedded design, concise and aesthetic in appearance.



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700 3000 4000 5000 6500 K K K K K		
CRI	Ra80/Ra90* (*only for 2700K/3000K)		

		190mm	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM
Prismatic		4W/400LM	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM
Square Grating 30°		4W/300LM	12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM
Square Grating 60°		4W/250LM	12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM
Round Grating 30/55°		5W/425lm	11W/850LM	22W/1700LM	28W/2125LM	33W/2550LM	44W/3400LM
Asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM
Double asymmetric		6W/675LM	12W/1350LM	24W/2700LM	30W/3375LM	36W/4050LM	48W/5400LM
Blind cover		/	/	/	/	/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Trimless Recessed	LR	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	190mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L
					Grating	G	Prismatic	P	Flat	F	White	W	600mm	(A)	24VDC Rigid module	R	3000K	WW	>90	9	individual	Customized	S								
					Lens	L	30°	F		Black	B	1200mm				4000K	NW														
							60°	H			1500mm				5000K	DW															
							Asymmetric	A			1800mm				6500K	W															
									2400mm																						
LLS	-		LR	25	F		D		X		S		S	2400	-		F		20		NW		8		X	-		D		L	

Ordering luminaires kits LLS-LR25FDXSS2400-F20NW8X-DL

☐ Diffuser/Prismatic/Asymmetric/Blind cover ☒ Grating 30°/60° ☒ Round Grating30/55°

Standard length

200mm 2400mm
Opening size:211*27mm Opening size:2406*27mm

600mm 1800mm
Opening size:611*27mm Opening size:1732*27mm

1200mm 1500mm
Opening size:1211*27mm Opening size:1445*27mm

1500mm 1200mm
Opening size:1511*27mm Opening size:1157*27mm

1800mm 600mm
Opening size:1811*27mm Opening size:583*27mm

2400mm 190mm
Opening size:2411*27mm Opening size:199*27mm

220mm
Opening size:223*27mm


550mm
Opening size:546*27mm

1100mm
Opening size:1085*27mm


1600mm
Opening size:1623*27mm

2200mm
Opening size:2162*27mm

Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)

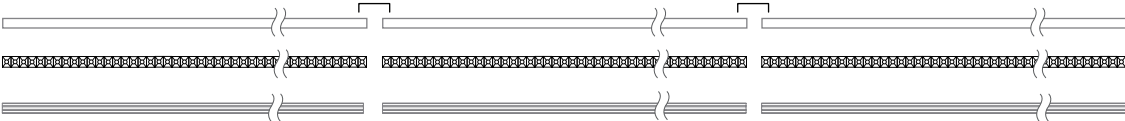



T-LINE 1 ”

T - LINE


T-Grid Linear Lighting



T-LINE 2 ”


T-LINE 2”

Recessed mounted


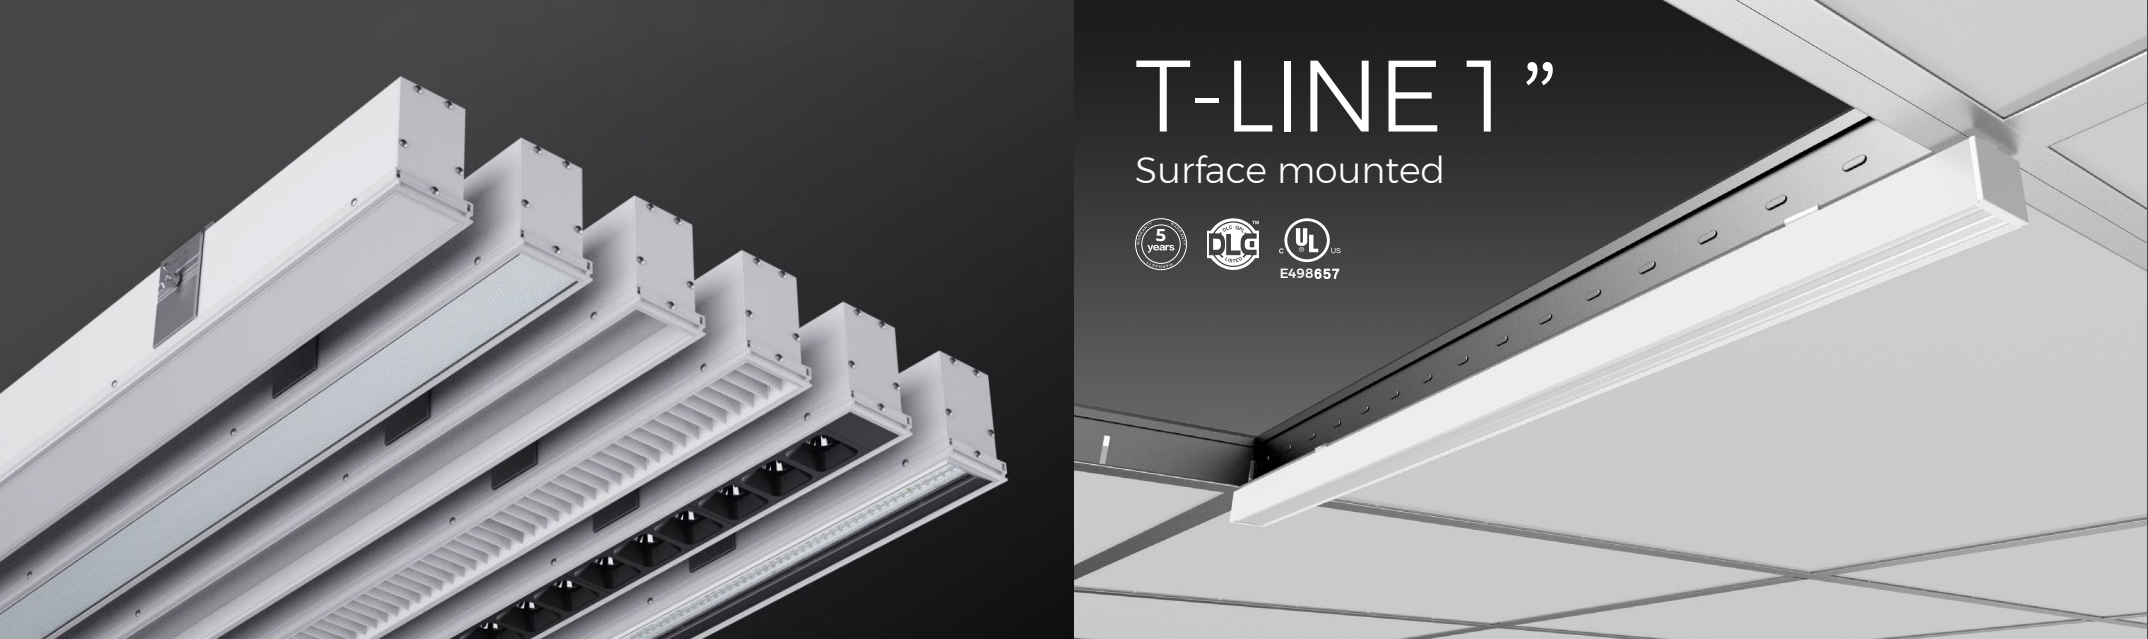


T-LINE 1”



Surface mounted




Model	SEL-LR5392FD
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Diffuser
Lumens	4200LM
Typ.power	40W
Beam angle	100°





Model	SEL-LR5392FP
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Microprism
Lumens	3600LM
Typ.power	40W
Beam angle	90°





Model	SEL-LR5392BD
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Blind Louver
Lumens	2700LM
Typ.power	40W
Beam angle	75°





Model	SEL-LR5392FR
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Regress
Lumens	3700LM
Typ.power	40W
Beam angle	100°



Model	SEL-LR5392G
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Grating
Lumens	2800LM
Typ.power	28W
Beam angle	15°/30°/45°





Model	SEL-LR5392LA
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Asymmetric
Lumens	3000LM
Typ.power	28W
Beam angle	90°x60°x15°





Model	SEL-LR5392LS
Size	1219*53*92mm (4x2"x3-3/5")
Optical	Double Asymmetric
Lumens	3300LM
Typ.power	28W
Beam angle	100°x90°



Width Adjustment

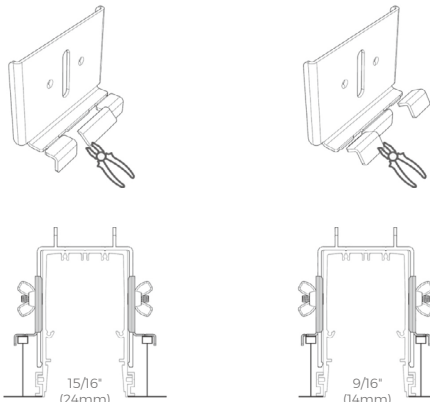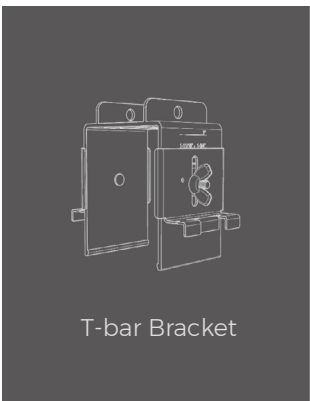


Height Adjustment

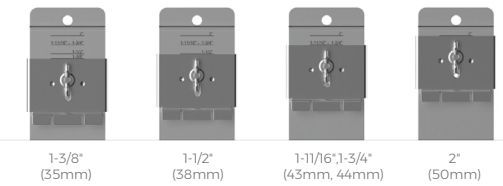



T-bar Recessed Mounting Options

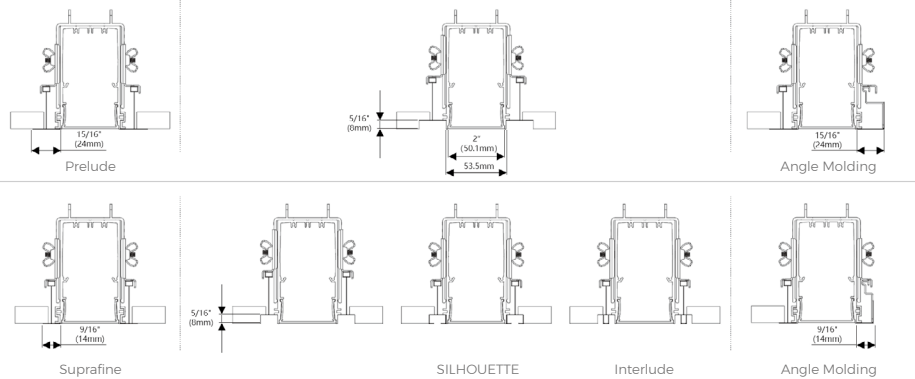


Model	SEL-LS2522FD
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Diffuser
Lumens	2200LM
Typ.power	24W
Beam angle	100°




Model	SEL-LS2522FP
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Microprism
Lumens	2400LM
Typ.power	24W
Beam angle	90°




Model	SEL-LS2522G
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Grating
Lumens	1800LM/1400LM
Typ.power	24W
Beam angle	30°/60°



Model	SEL-LS2522LA
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Asymmetric
Lumens	3000LM
Typ.power	24W
Beam angle	90°x45°x15°




Model	SEL-LS2522LS
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Double Asymmetric
Lumens	3000LM
Typ.power	24W
Beam angle	100°x90°



Model	SEL-LS2522KD
Size	1219*25*22mm (4x15/16"x0.87")
Optical	Block Frosted diffuser
Lumens	2800LM
Typ.power	24W
Beam angle	165°



Patented Mounting Solution

US ID: **PAT5879375**

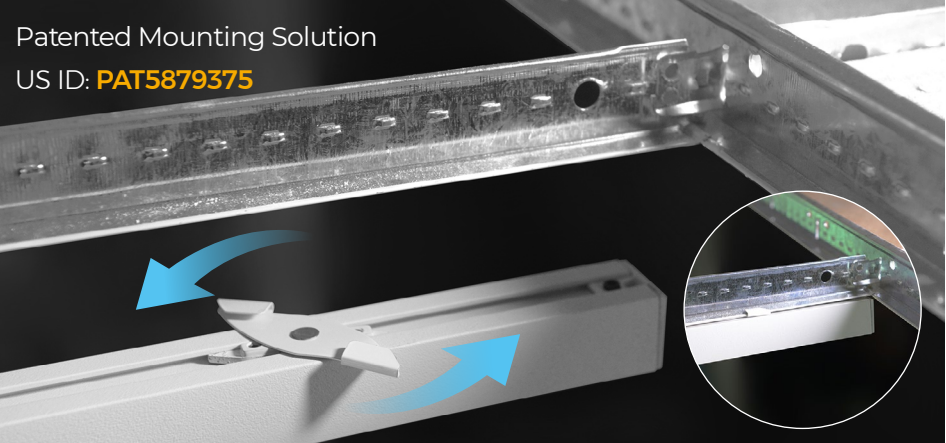

24VDC LED Driver 100W Power Supply



0-10V/PWM/Resistor 3-in-1 dimmable and non dimmable

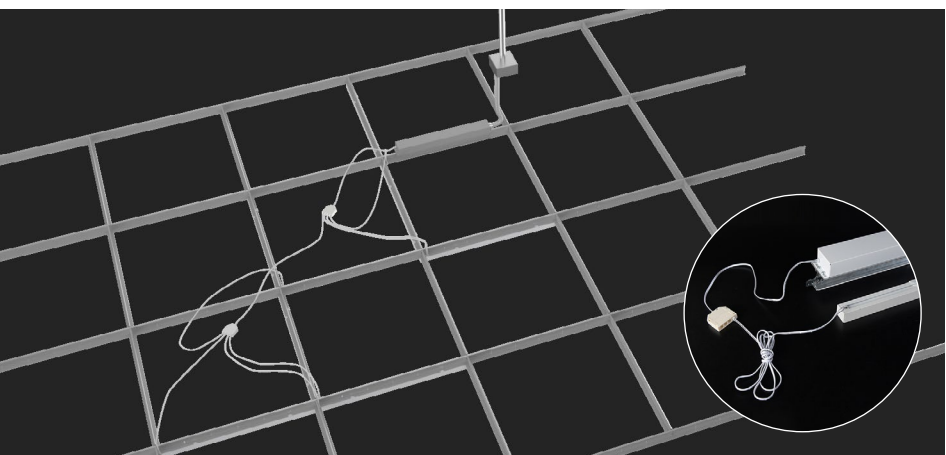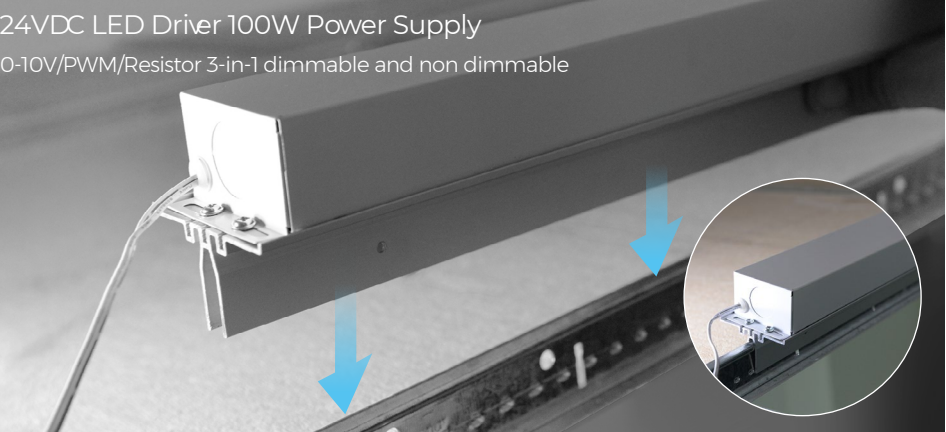

SEL-LS2522

DC 24V

- Diffuser luminaire, adopt flood lighting design, featured uniform light-emitting surface.
- Adopt highly-reflective material, improving light emission efficiency significantly.
- Flood lighting design, ideal choice for efficient lighting in public space.

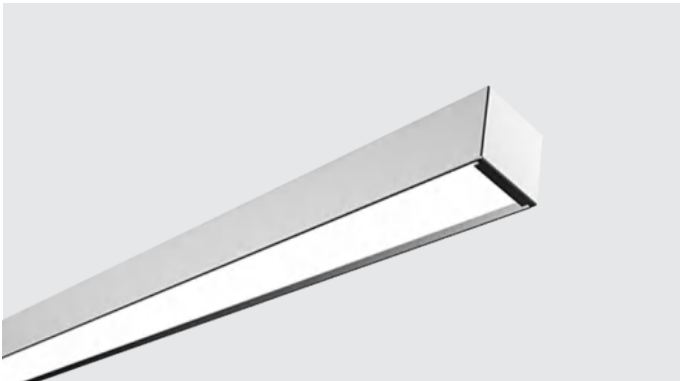

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
CCT	2700 K3000 K4000 K5000 K6500 K
CRI	Ra80/Ra90*(*only for 2700K/3000K)


		600mm	1200mm
Diffuser		12W/1100LM	24W/2200LM
Prismatic		12W/1200LM	24W/2400LM
Square Grating 30°		12W/900LM	24W/1800LM
Square Grating 60°		12W/700LM	24W/1400LM
Round Grating30/55°		11W/850lm	22W/1700lm
Block frosted diffuser		12W/1400LM	24W/2800LM
Blind Cover		/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type				
T-LINE 1"	-	Pendant	LS 2522	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	190mm	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	SEL	D	SEL	L			
				Grating	G	Prismatic	P	Carrier	F	White	W			600mm		24VDC Rigid module	R			3000K	WW	>90	9			-	individual		Customized	S			
				Square	X	30°	F			Black	B			1200mm						4000K	NW												
						60°	H									1500mm				5000K	DW												
																1800mm				6500K	W												
													2400mm																				
TL	-		LS 2522		F		D		X		W		S	600	-		R	20		NW		8		X	-		D			L			

Ordering luminaires kits TL-LS2522FDXWS600-F20NW8X-DL



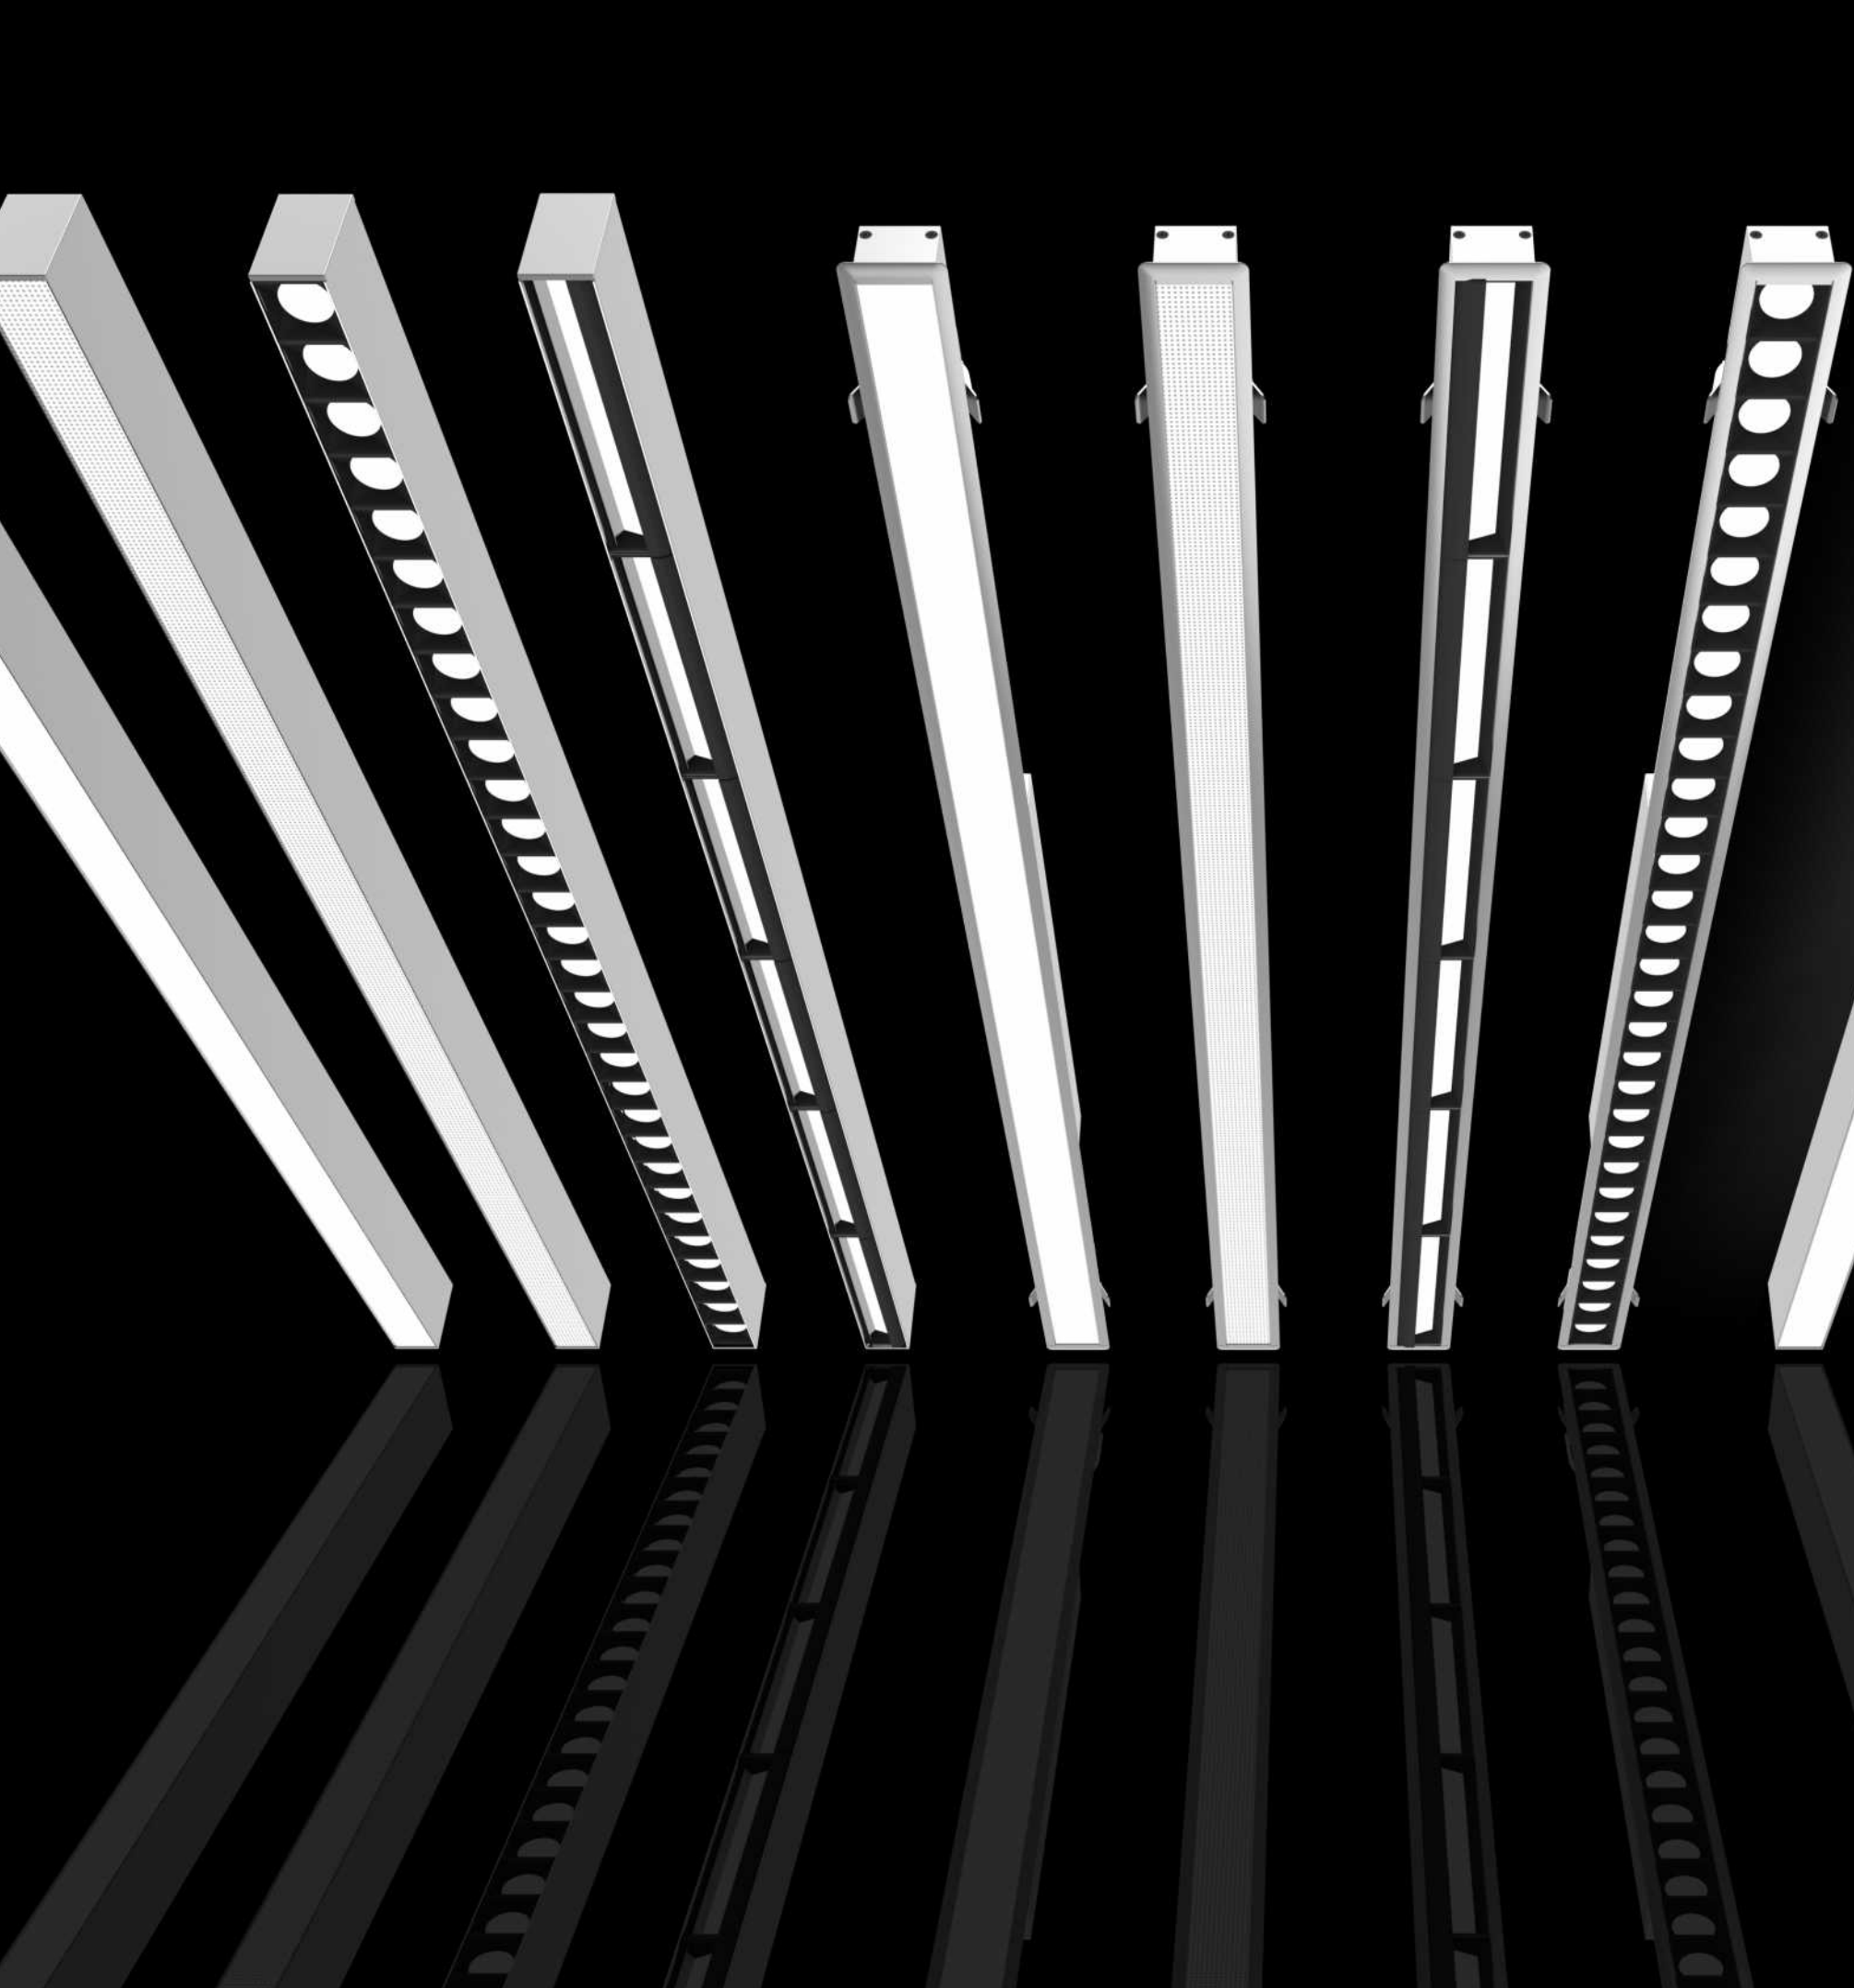

GLS40 Series

GLS40 series adopt modernist design, integrating simplicity and elegance in one. It is meticulously crafted and detail-oriented. The light displays diversity in style for you to choose, and is featured in more individualized intelligence design in the hope of satisfying your ultimate lighting experience.

Light and shadow follow, choose as you like

Pendant / Surface mounted


Pendant (Lighting upward&downward)

Recessed

General Lighting

Adopt diffuser of high light transmittance. Featured in high luminous flux, high efficiency and uniform lighting, it is the best choice for public space lighting.

LS40




Diffuser



Prismatic Diffuse



LH40



Diffuser



Prismatic Diffuse



LE40



Diffuser



Prismatic Diffuse



Accent lighting

Ultra anti-glare design, shielding angle>30° , UGR<13, eye-friendly feature. suitable for video conference room or accent lighting.

LS40G



Grating



12°

24°

38°

50°

LH40G



Grating




12°

24°

38°

50°

LE40G



Grating



12°

24°

38°

50°

Polarizing lighting

Asymmetric optical design, featured in uniform lighting, suitable for wall or shelf lighting, can be applied in museum, library, retail store or reception areas.

LS40GW



Wallwash




LE40GW



Wallwash



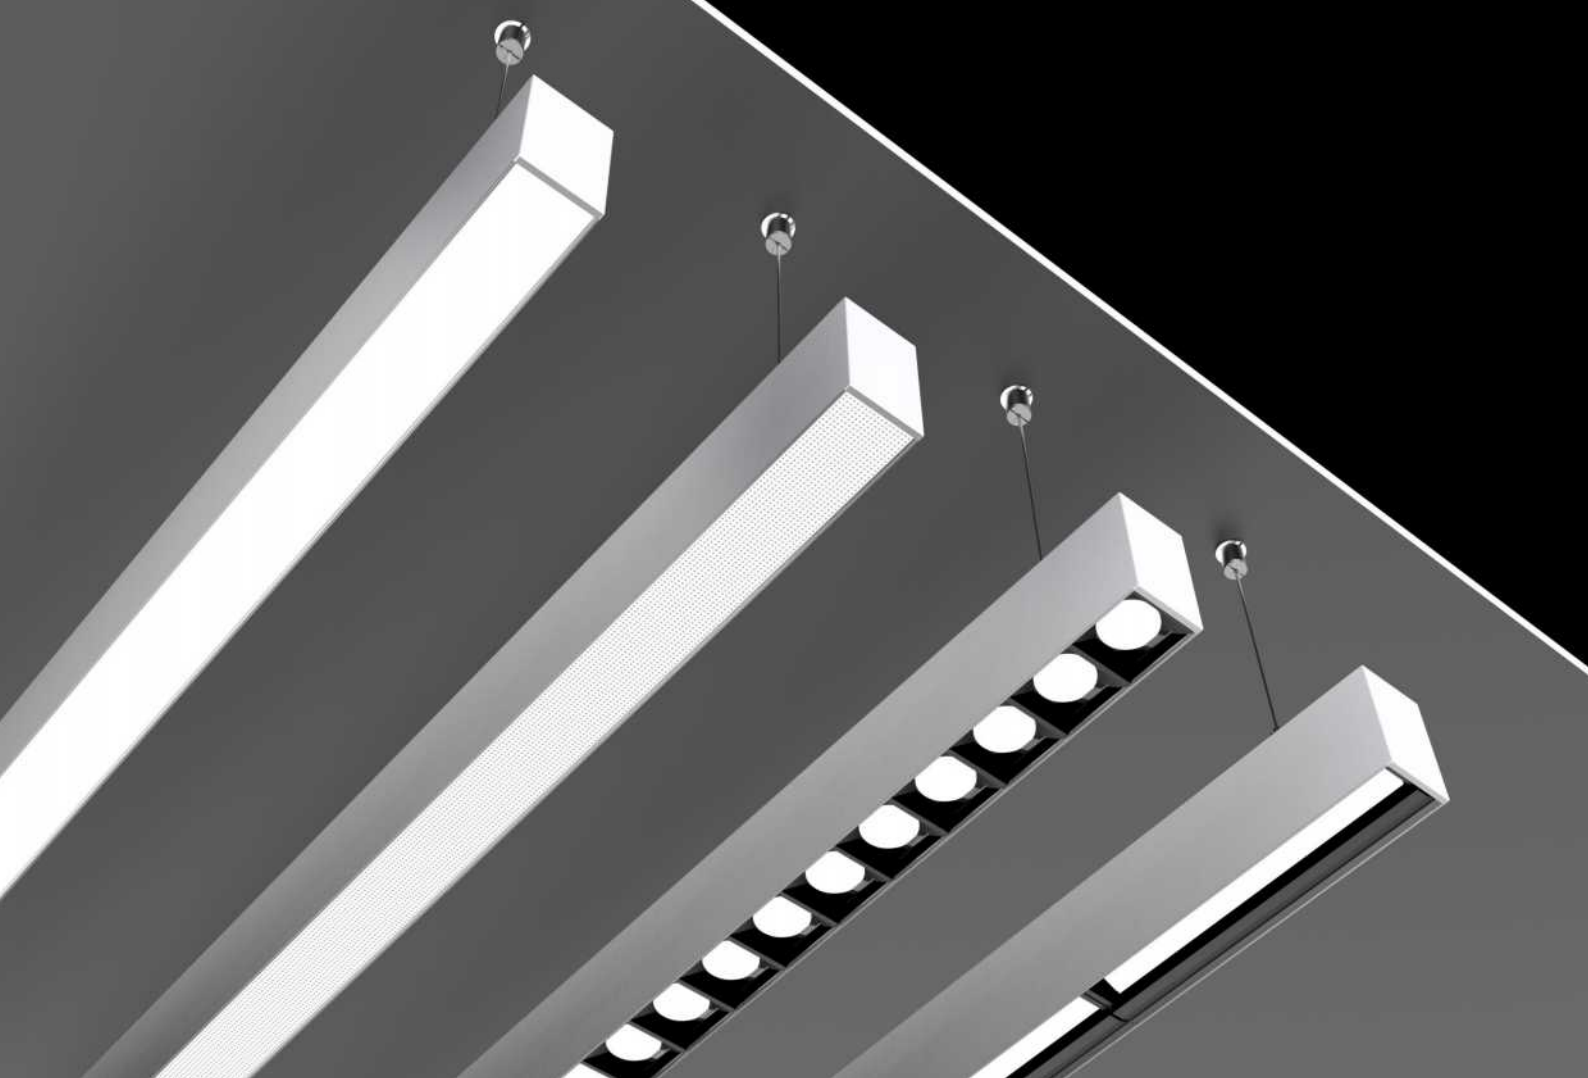




LS40 Series

Pendant Series


LS40 series, the newly-launched super cost-effective main lighting product, featured in modernist design, is simple and fashionable. With delicate crafts and ingenious tailoring adopted, it is full of texture. Moreover, it is featured in adjustable installation height, reliability, high luminous efficiency and excellent heat dissipation.

SEL-LS40FD

- Bridgelux LED SMD LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- Surface mounted, Pendant optional
- Black, white and silver are available

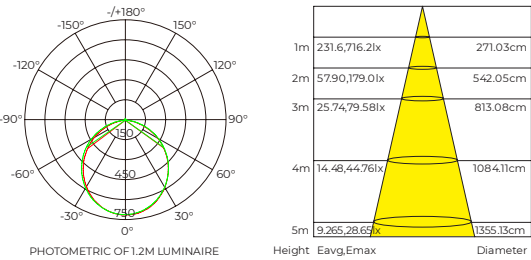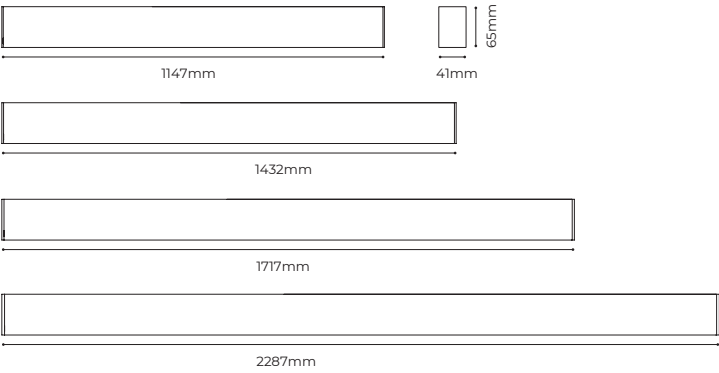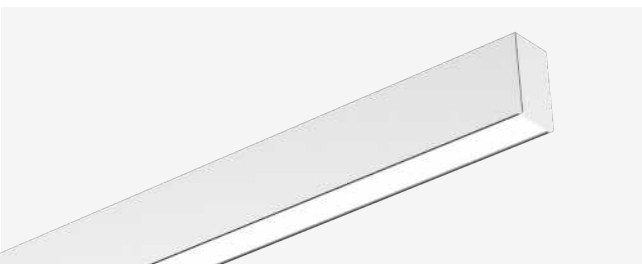

Luminaire Parameters					Installation Accessories	
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm	Pendant cable (with junction box)	PY-DSA2/PY-DSA4
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm	Pendant cable (without junction box)	PN-DA2/PN-DA4
Diffuser	Diffuser				Pendant Rod	PG-IA2
Diffuser material	PC				Hoisting clip	CL-08
Lumens	4300LM	5380LM	6450LM	8600LM		
Typ.power	38W	48W	56W	76W		
CCT	3000K/3500K/4000K					
CRI	>80 (90 optional)					
Beam angle	110°					
Input voltage	200-240VAC 50Hz/60Hz					
Power factor	>0.9					
Power Supply	Built-in isolated					
Dimming	0-10V/DALI					
Color	Silver White Black					
Installation	Pendant/Surface mounted					
Warranty	5 years					
Certification	CE					

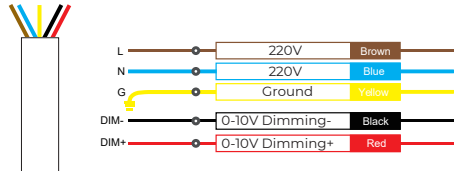


Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Typ. Power of Luminaire	CCT	CRI	Power Type	Package	Label Type
CLS	Pendant LS	40 Series 40	Flat F	Diffuser D	No X	White W	Standard End Cap S	1200mm	Constant Current Rigid T	38W 38	3000K WW	>80 8	0-10V Dimming B	SEL Individual D	SEL L
						Black B		1500mm		48W 48	3500K PW		DALI Dimming A		
						Silver S		1800mm		56W 56	4000K NW				
								2300mm		76W 76					
CLS	-	LS	40	F	D	X	W	S 1200	-	T	38	NW	8	B -	D L

CLS-LS40FDXSS1200-T38NW8B-DL



SEL-LS40FP

- Bridgelux LED SMD LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- Surface mounted, Pendant optional
- Black, white and silver are available
- Prismatic diffuser design

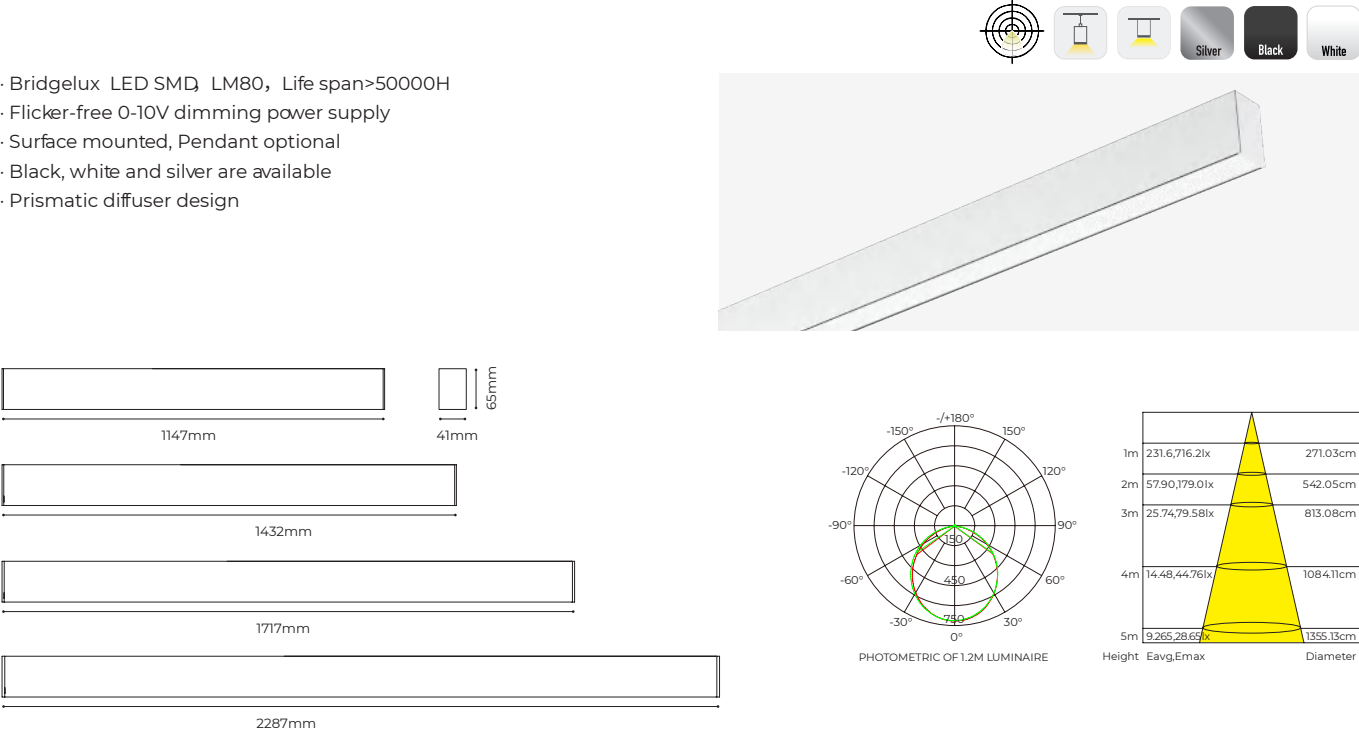

Luminaire Parameters					Installation Accessories		
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm	Pendant cable (with junction box)	PY-DSA2/PY-DSA4	
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm	Pendant cable (without junction box)	PN-DA2/PN-DA4	
Diffuser	Prismatic Diffuse				Pendant Rod	PG-IA2	
Diffuser material	PC				Hoisting clip	CL-08	
Lumens	3950LM	4940LM	5930LM	7900LM			
Typ.power	38W	48W	56W	76W			
CCT	3000K/3500K/4000K						
CRI	>80 (90 optional)						
Beam angle	90°						
Input voltage	200-240VAC 50Hz/60Hz						
Power factor	>0.9						
Power Supply	Built-in isolated						
Dimming	0-10V/DALI						
Color	Silver White Black						
Installation	Pendant/Surface mounted						
Warranty	5 years						
Certification	CE						

Ordering Code


Category	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	-	Light Source Type	Typ. Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type				
GLS	-	Pendant	LS	40 Series	40	Flat	F	Prismatic	P	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	T	38W	38	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L	
												Black	B			1500mm			48W	48	3500K	PW			DALI Dimming	A			Customized	S		
												Silver	S			1800mm			56W	56	4000K	NW										
																2300mm			76W	76												
GLS	-		LS		40		F		P		X		W		S	1200	-		T		38		NW		8		B	-		D		L

GLS-LS40FPXSST1200-T38NW8B-DL



SEL-LS40G

- 12° /24° /38° /50° multiple light distribution, more applications
- Ultra anti-glare design UGR<13
- OSRAM LED SMD LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- Black, white and silver are available

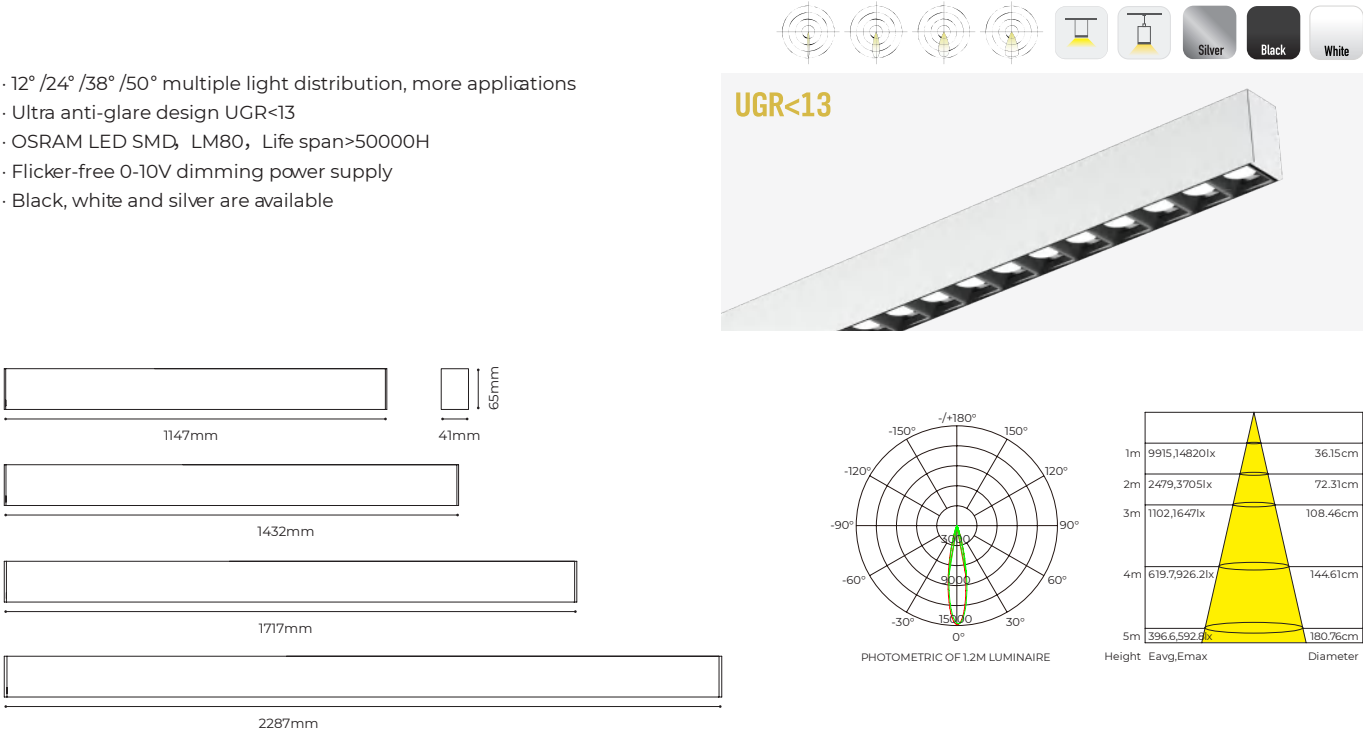

Luminaire Parameters					Installation Accessories		
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm	Pendant cable (with junction box)	PY-DSA2/PY-DSA4	
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm	Pendant cable (without junction box)	PN-DA2/PN-DA4	
Diffuser	Grating				Pendant Rod	PG-IA2	
Diffuser material	PC				Hoisting clip	CL-08	
Lumens	3060LM	3830LM	4590LM	6120LM			
Typ.power	36W	43W	54W	68W			
CCT	3000K/3500K/4000K						
CRI	>80 (90 optional)						
Beam angle	12° /24° /38° /50°						
Input voltage	200-240VAC 50Hz/60Hz						
Power factor	>0.9						
Power Supply	Built-in isolated						
Dimming	0-10V/DALI						
Color	Silver White Black						
Installation	Pendant/Surface mounted						
Warranty	5 years						
Certification	CE						

Ordering Code



Category	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type		Package		Label Type				
CLS	-	Pendant	LS	40 Series	40	Grating	G	12°	E	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	T	36W	36	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L
								24°	F			Black	B			1500mm				43W	43	3500K	PW			DALI Dimming	A			Customized	S
								38°	G			Silver	S			1800mm				54W	54	4000K	NW								
								50°	H							2300mm				68W	68										
CLS	-		LS	40		G		H		X		W		S	1200	-		T		36		WW		8		B	-		D		L

GLS-LS40GHXWS1200-T36NW8B-DL




SEL-LS40GW

- Asymmetric 20° , Uniform wall-washing lighting
- OSRAM LED SMD, LM80, Li>50000H
- Flicker-free 0-10V dimming power supply
- Surface mounted, Pendant, optional
- Black, white and silver are available

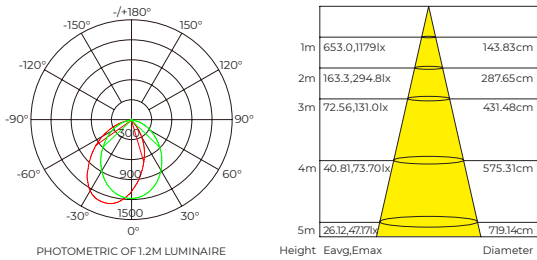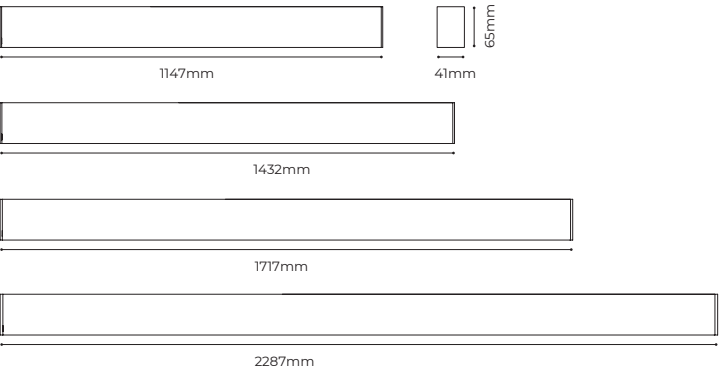

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Opening size 	1150*44mm	1530*44mm	1720*44mm	2290*44mm
Diffuser	Wall wash			
Diffuser material	PC			
Lumens	2200LM	2750LM	3300LM	4400LM
Typ.power	36W	43W	54W	68W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	100° x70° (Asymmetric: 20°)			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power Supply	Built-in isolated			
Dimming	0-10V/DALI			
Color	Silver  White  Black 			
Installation	Pendant/Surface mounted			
Warranty	5 years			
Certification	CE			


Installation Accessories		
Pendant cable (with junction box)	PY-DSA2/PY-DSA4	
Pendant cable (without junction box)	PN-DA2/PN-DA4	
Pendant Rod	PG-IA2	
Hoisting clip	CL-08	

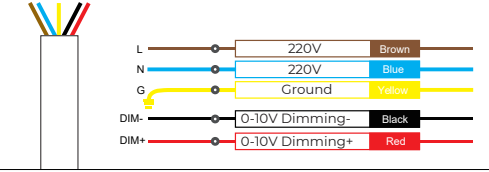

Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Typ. Power of Luminaire	CCT	CRI	Power Type	Package	Label Type
GLS	-	Pendant	LS 40 Series 40	Grating G	Wall wash W	No X	Standard End Cap S	1200mm	Constant Current Rigid T	36W	36	3000K	WW	0-10V Dimming B - DALI Dimming A	SEL Individual D Customized S
								1500mm		43W	43	3500K	PW		
								1800mm		54W	54	4000K	NW		
								2300mm		68W	68				
GLS	-	LS	40	G	W	X	W	S 1200	- T	36	NW	8	B -	D	L

GLS-LS40GWXWSI200-T36NW8B-DL

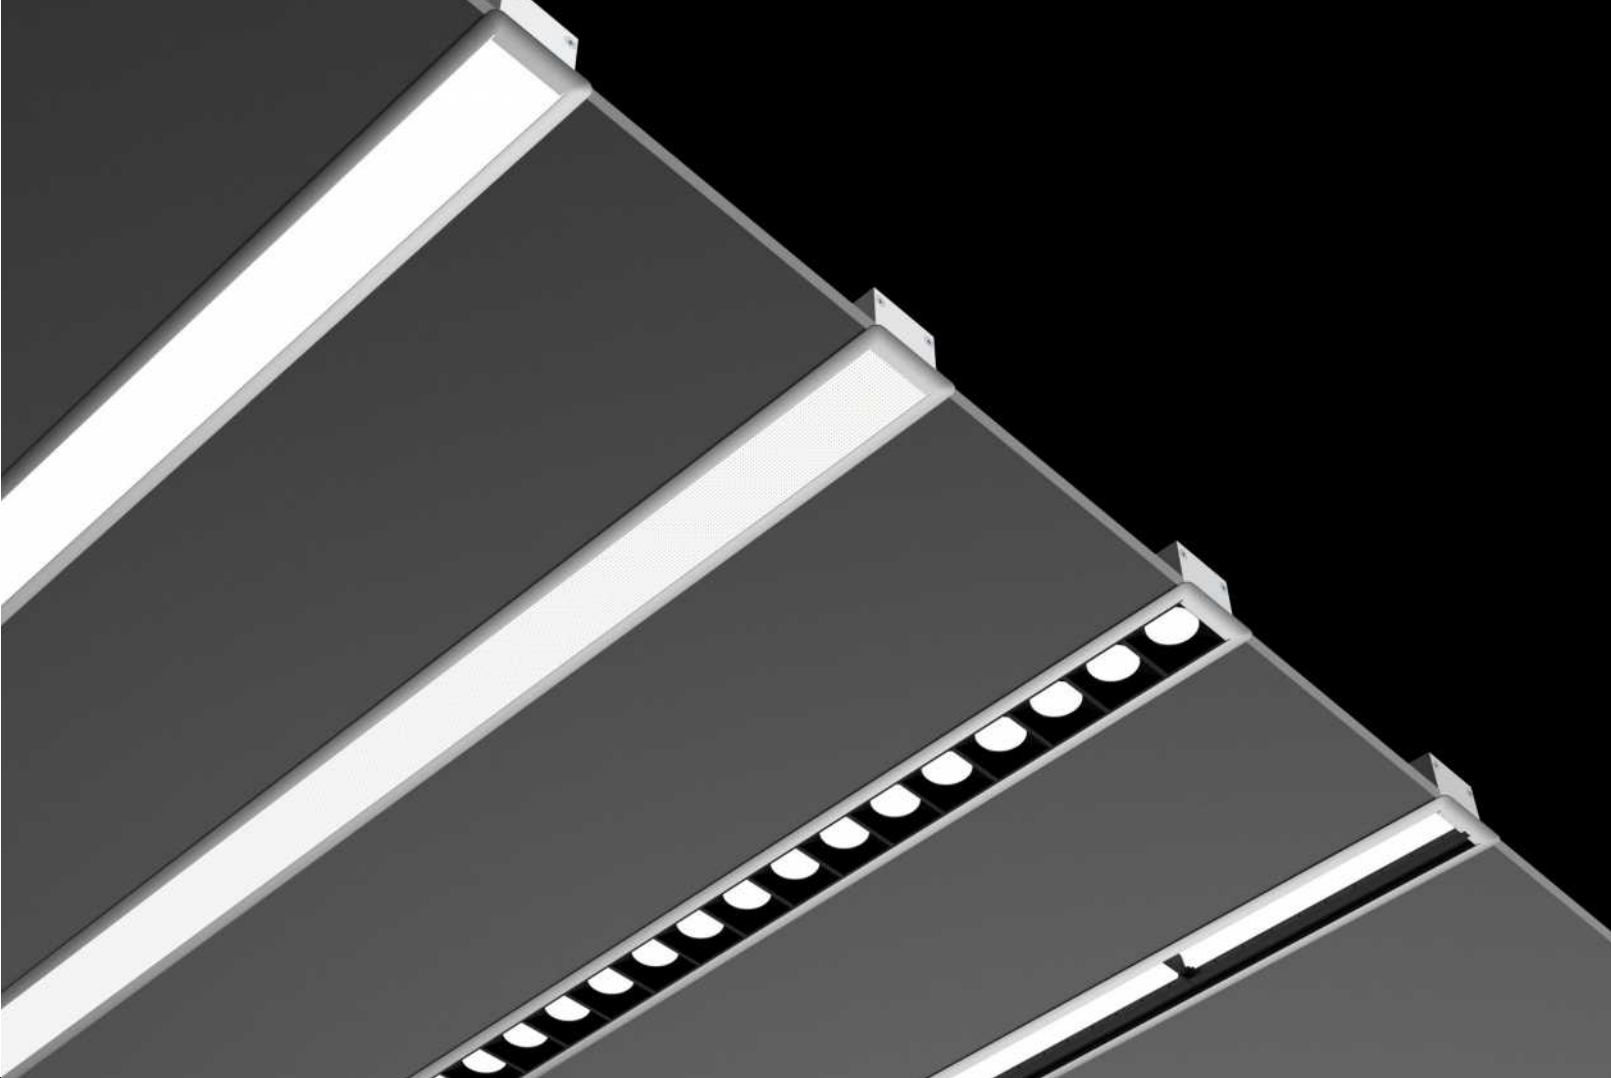



LE40 Series

Recessed Series

LE40 series is featured in embedded installation and flexible adjustment. Black light technology assures of excellent light reflection effects and thus realizes ultimate anti-glare, key lighting, overflowing light effect.

SEL-LE40FD

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life span > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Flicker-free 0-10V dimming power supply

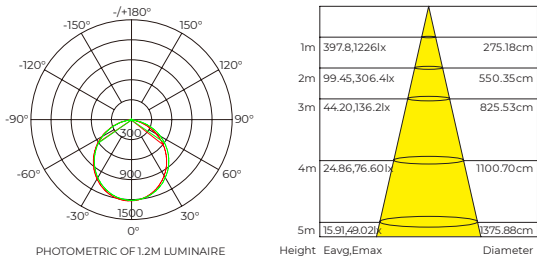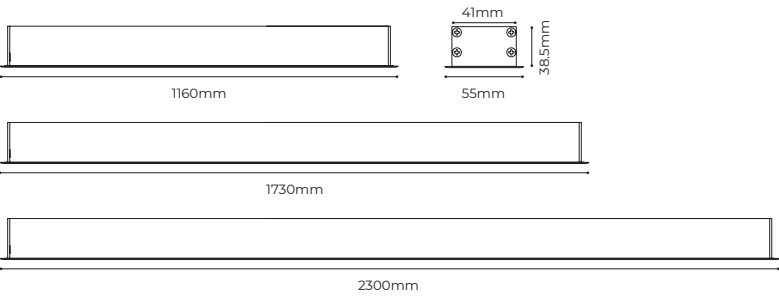

Luminaire Parameters				
Size	1160*55*38.5mm	1445*55*38.5mm	1730*55*38.5mm	2300*55*38.5mm
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm
Diffuser	Diffuser			
Diffuser material	PC			
Lumens	4300LM	5380LM	6450LM	8600LM
Typ.power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	110°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power Supply	External isolated			
Dimming	0-10V/DALI			
Color	Silver ☒ White ☐ Black ☐			
Installation	Recessed			
Warranty	5 years			
Certification	CE、CB			




Ordering Code																																		
Category		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Typ. Power of Luminaire		CCT	CRI		Power Type		-	Package		Label Type				
GLS	-	Recessed	LE	40 Series	40	Flat	F	Diffuser	D	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Board	T	38W	38	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L		
												Black	B			1500mm				48W	48	3500K	PW								DALI Dimming	A	Customized	S
												Silver	S			1800mm				56W	56	4000K	NW											
																2300mm				76W	76													
GLS	-		LE		40		F		D		X	W		S	1200	-		T		38		WW		B		B	-		D	L				

GLS-LE40FDXWS1200-T38NW8B-DL



SEL-LE40FP

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life span > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Flicker-free 0-10V dimming power supply
- Prismatic Diffuser design

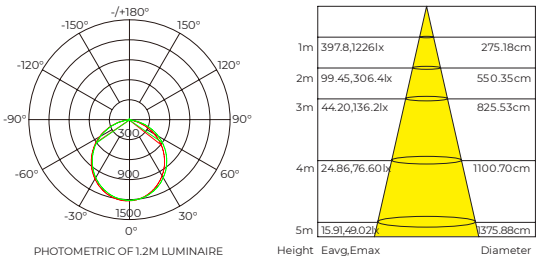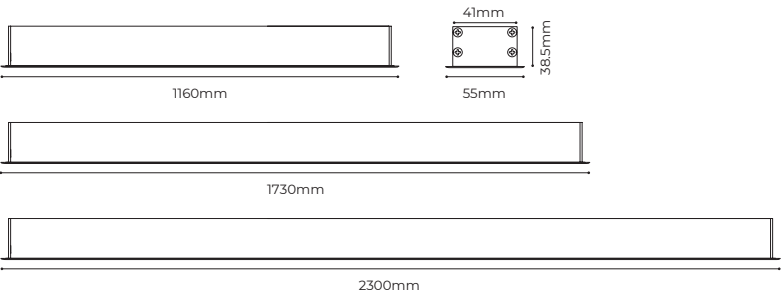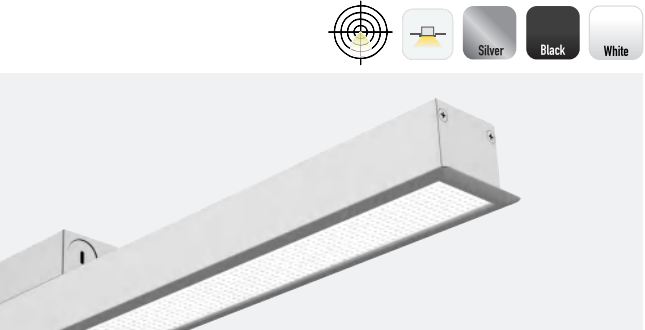

Luminaire Parameters				
Size	1160*55*38.5mm	1445*55*38.5mm	1730*55*38.5mm	2300*55*38.5mm
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm
Diffuser	Prismatic Diffuse			
Diffuser material	PC			
Lumens	3950LM	4940LM	5930LM	7900LM
Typ.power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	90°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power Supply	External isolated			
Dimming	0-10V/DALI			
Color	Silver ☒ White ☐ Black ☐			
Installation	Recessed			
Warrant	5 years			
Certification	CE、CB			

Ordering Code																																
Category	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type		
GLS	-	Recessed	LE	40 Series	40	Flat	F	Prismatic Diffuser	P	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	38W	38	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L
												Black	B		1500mm	48W	48		3500K	PW	DALI Dimming	A	Customized	S								
												Silver	S		1800mm	56W	56		4000K	NW												
															2300mm	76W	76															
GLS	-		LE		40		F		P		X	W		S	1200	-		T		38		WW		8		B	-		D		L	

GLS-LE40FPXWS1200-T38NW8B-DL







LH40 Series

Upward and downward lighting luminaries


LH40 series provide excellent indirect upward and downward lighting. Downward lighting provide premium basic lighting while upward lighting with large luminous surface can light up ceiling in a uniform way to create more transparent space.

SEL-LH40FD

- Bridgelux LED SMD, LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- Pendant installation
- Black, white and silver optional
- Upward and downward lighting

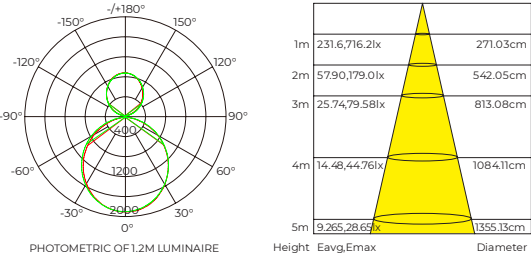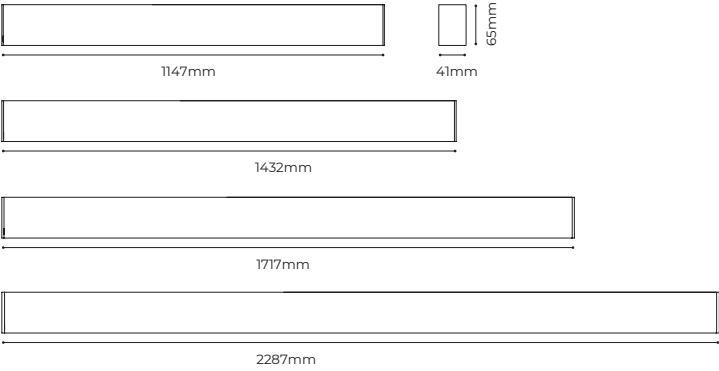

Luminaire Parameters					Installation Accessories	
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm	Pendant cable (with junction box)	PY-DSA2/PY-DSA4
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm	Pendant cable (without junction box)	PN-DA2/PN-DA4
Diffuser	Diffuser				Pendant Rod	PG-IA2
Diffuser material	PC				Clip	CP-32
Lumens	(up)1400LM (down)4300LM	(up)1750LM (down)5380LM	(up)2100LM (down)6450LM	(up)2800LM (down)8600LM		
Typ.power	48W	60W	72W	96W		
CCT	3000K/3500K/4000K					
CRI	>80 (90 optional)					
Beam angle	110°					
Input voltage	200-240VAC 50Hz/60Hz					
Power factor	>0.9					
Power Supply	Built-in isolated					
Dimming	0-10V/DALI					
Color	Silver White Black					
Installation	Pendant					
Warranty	5 years					
Certification	CE					


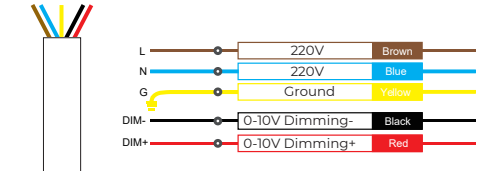


Ordering Code																																
Category		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Typ. Power of Luminaire		CCT	CRI	Power Type		-	Package		Label Type			
GLS	-	Pendant	LH	40 Series	40	Flat	F	Diffuser	D	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	48W	48	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L
												Black	B			1500mm				60W	60	3500K	PW			DALI Dimming	A			Customized	S	
												Silver	S			1800mm				72W	72	4000K	NW									
																2300mm				96W	96											
GLS	-		LH		40		F		D		X		W		S	1200	-		T		48		NW		8		B	-		D		L

GLS-LH40FDXSSI200-T48NW8B-DL


SEL-LH40FP

- Bridgelux LED SMD, LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- Pendant installation
- Black, white and silver optional
- Upward and downward lighting optional
- Prismatic Diffuser design

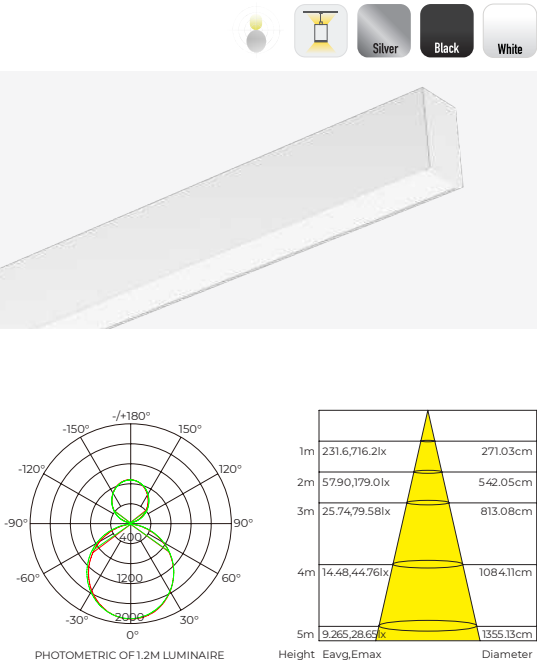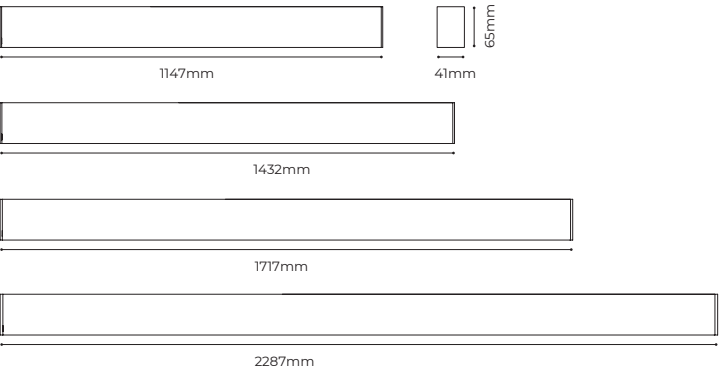

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Opening size	1150*44mm	1530*44mm	1720*44mm	2290*44mm
Diffuser	Prismatic Diffuser			
Diffuser material	PC			
Lumens	(up)1400LM (down)3950LM	(up)175LM (down)4940LM	(up)2100LM (down)5930LM	(up)2800LM (down)7900LM
Typ.power	48W	60W	72W	96W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	90°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power Supply	Built-in isolated			
Dimming	0-10V/DALI			
Color	Silver White Black			
Installation	Pendant			
Warranty	5 years			
Certification	CE			

Installation Accessories		
Pendant cable (with junction box)	PY-DSA2/PY-DSA4	
Pendant cable (without junction box)	PN-DA2/PN-DA4	
Pendant Rod	PG-IA2	
Clip	CP-32	

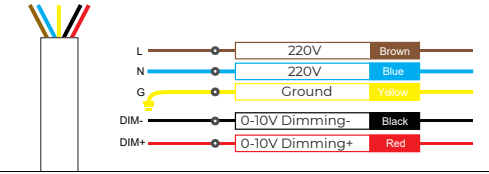



Ordering Code

Category	Series			Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	-	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type			-	Package		Label Type		
CLS	-	Pendant	LH	40 Series	40	Flat	F	Prismatic Diffuser	P	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	48W	48	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L	
												Black	B			1500mm			60W	60	3500K	PW			DALI Dimming		A				Customized	S	
												Silver	S			1800mm			72W	72	4000K	NW											
																2300mm			96W	96													
CLS	-		LH		40		F		P		X		W		S	1200	-		T		38		NW		8		B	-		D		L	

CLS-LH40FPXSSI200-T38NW8B-DL


SEL-LH40G

- 12° /24° /38° /50° multiple optical design, more applications
- Ultra anti-glare design UGR<13
- Osram LED, LM80, Life span>50000H
- Flicker-free 0-10V dimming power supply
- black, white and silver optional
- Upward and downward lighting

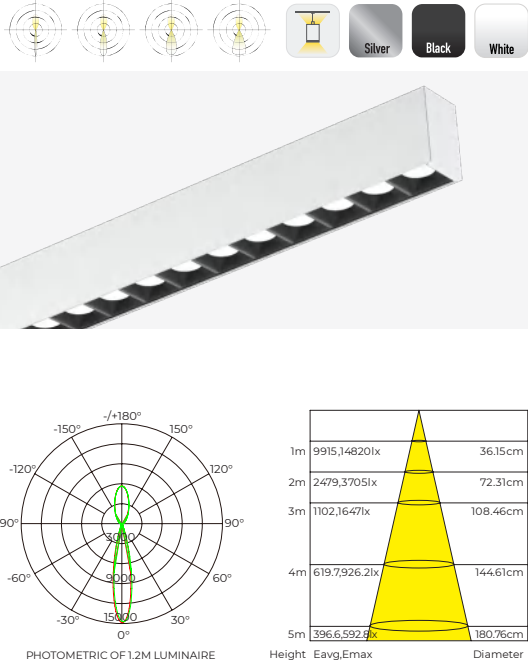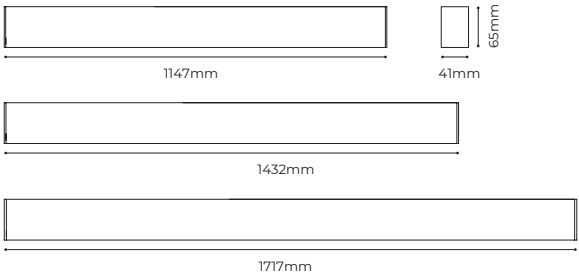

Luminaire Parameters			
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm
Opening size	1150*44mm	1530*44mm	1720*44mm
Diffuser	Grating		
Diffuser material	PC		
Lumens	(up)1400LM (down)3060LM	(up)175LM (down)3830LM	(up)2100LM (down)4590LM
Typ.power	47W	59W	70W
CCT	3000K/3500K/4000K		
CRI	>80 (90 optional)		
Beam angle	12° /24° /38° /50°		
Input voltage	200-240VAC 50Hz/60Hz		
Power factor	>0.9		
Power Supply	Built-in isolated		
Dimming	0-10V/DALI		
Color	Silver White Black		
Installation	Pendant		
Warranty	5 years		
Certification	CE		


Installation Accessories		
Pendant cable (with junction box)	PY-DSA2/PY-DSA4	
Pendant cable (without junction box)	PN-DA2/PN-DA4	
Pendant Rod	PG-IA2	
Clip	CP-32	

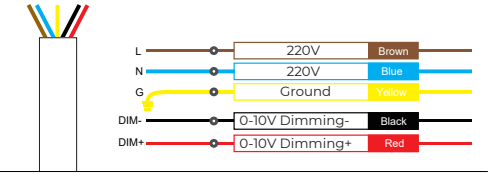

Ordering Code

Category	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	Light Source Type		Typ. Power of Luminaire		CCT	CRI		Power Type		Package		Label Type								
CLS	-	Pendant	LH	40 Series	40	Grating	G	12°	E	No	X	White	W	Standard End Cap	1200mm	-	Constant Current Rigid	T	47W	47	3000K	WW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L			
								24°	F			Black			B			1500mm	59W	59	3500K	PW			DALI Dimming							A	Customized	S
								38°	G			Silver			S			1800mm	70W	70	4000K	NW												
								50°	H																									
CLS	-		LH	40		G		H		X		W		S	1200	-		T		47		WW		8		B	-		D					

CLS-LH40GHXWSI200-T47NW8B-DL

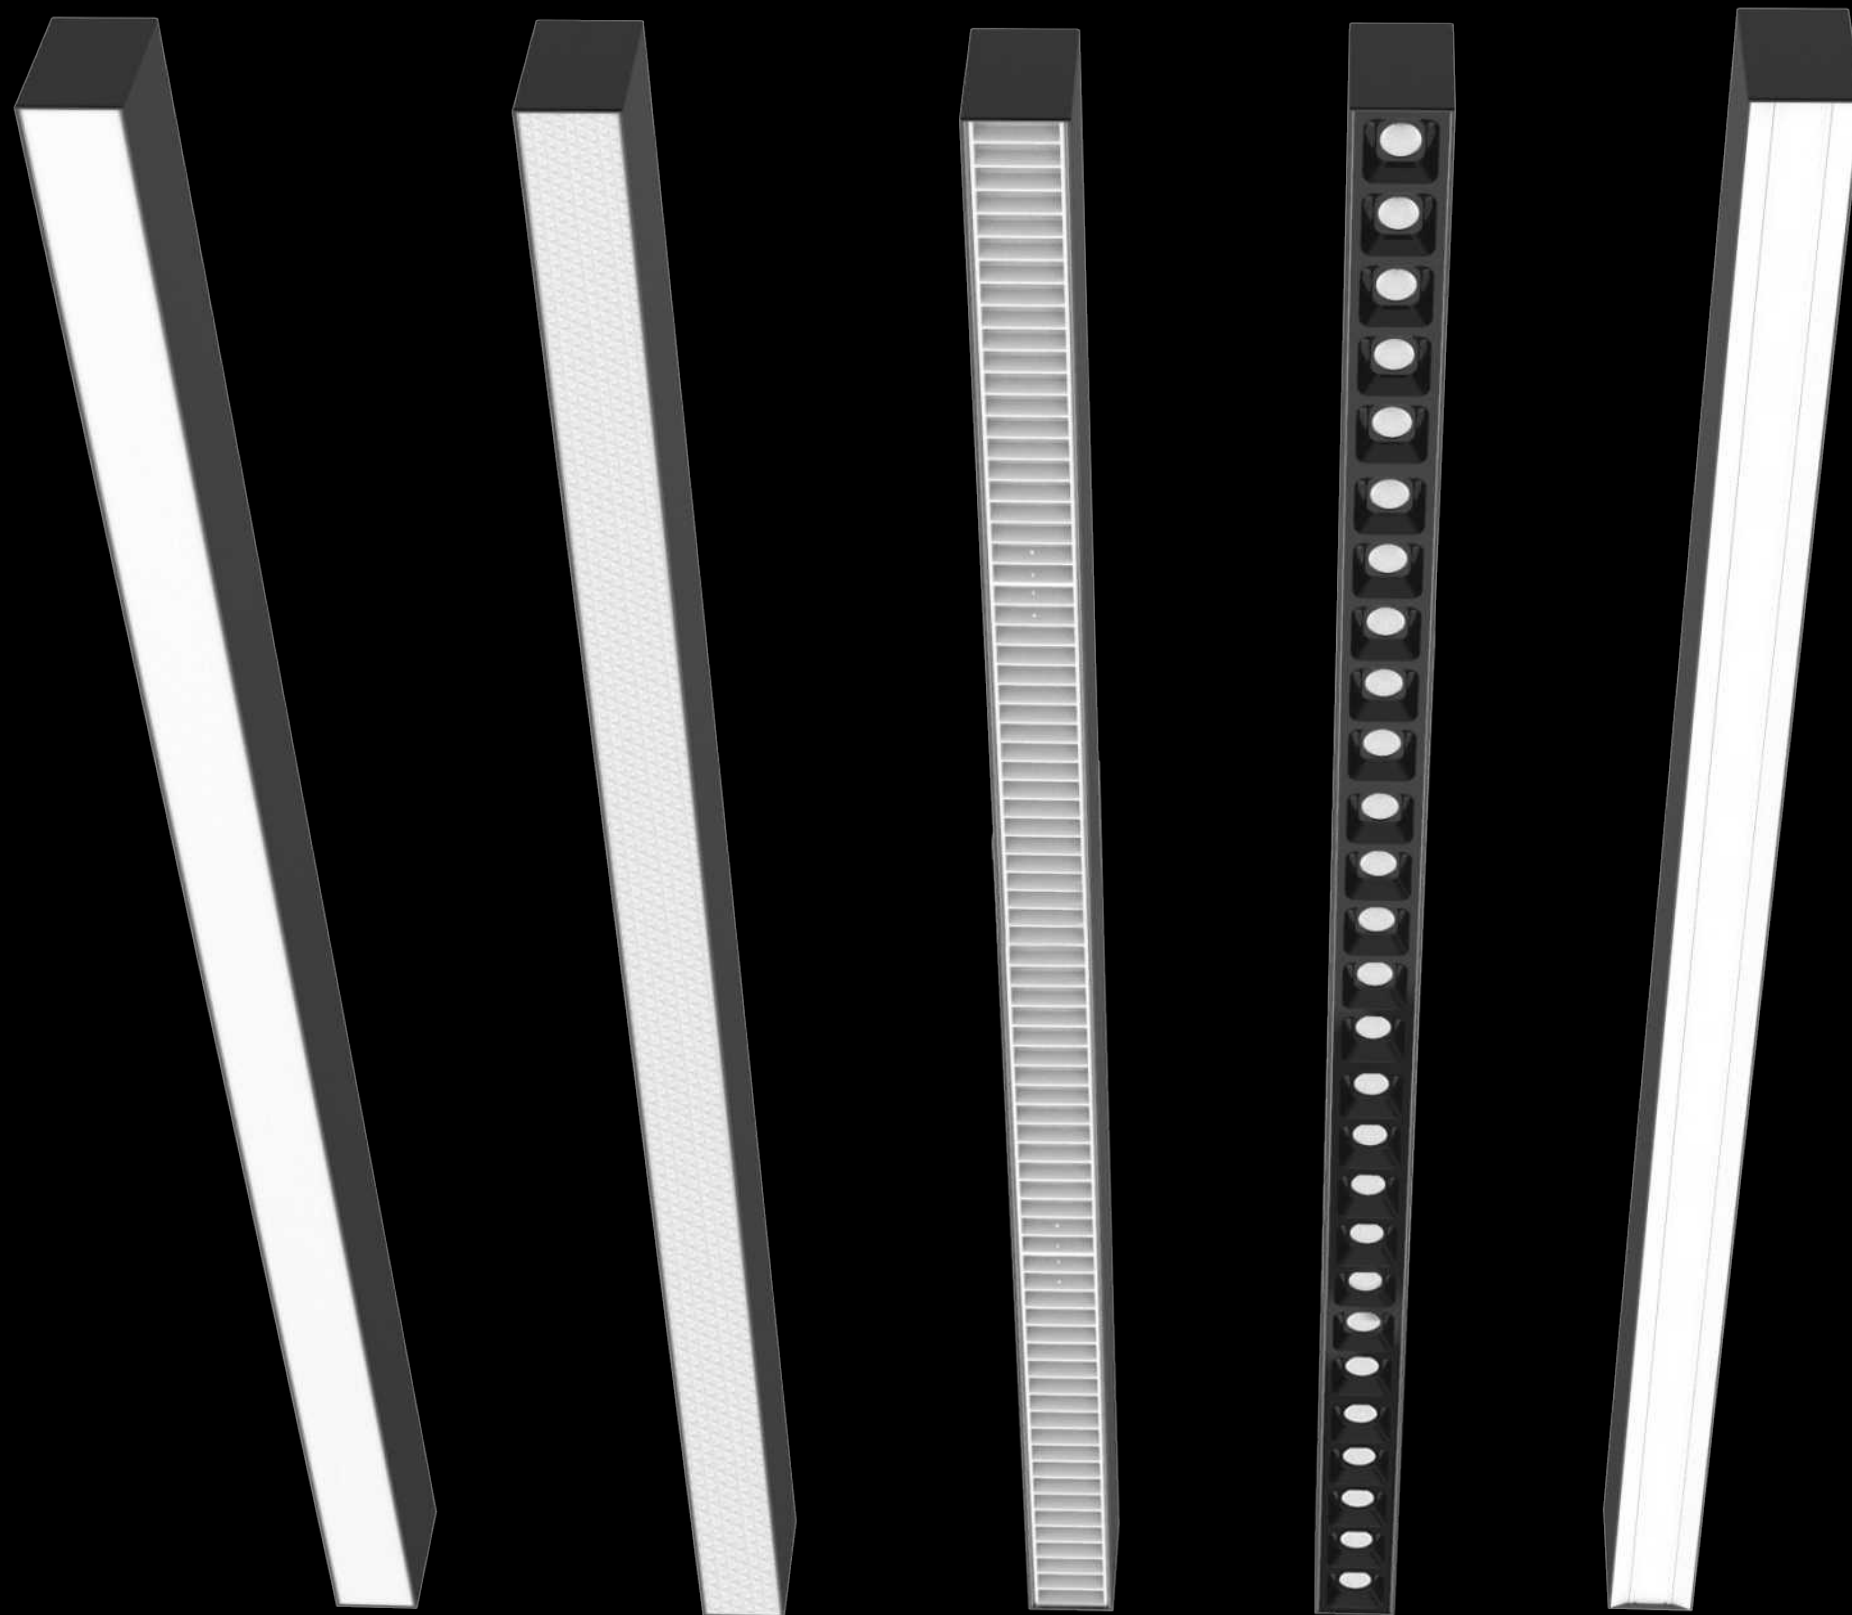

LINE 60 Series


SEL "LINE 60 series" adopts professional optical and structure design to realize 6 different light distribution methods. This series can provide professional indoor functional lighting, special lighting. It can meet the requirements of special lighting, diverse style for choice and more personalized design, just to satisfy your ultimate lighting experience.

SEL-LS60FD

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-105lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- Suitable for space main lighting, cold lighting.



Luminaire parameters		
Size	L1194*W56*H85mm	L2380*W56*H85mm
Diffuser	Diffuser	
Diffuser Material	PC	
Lumens	3880LM	7150LM
Typ.Power	37W	68W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	90°	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

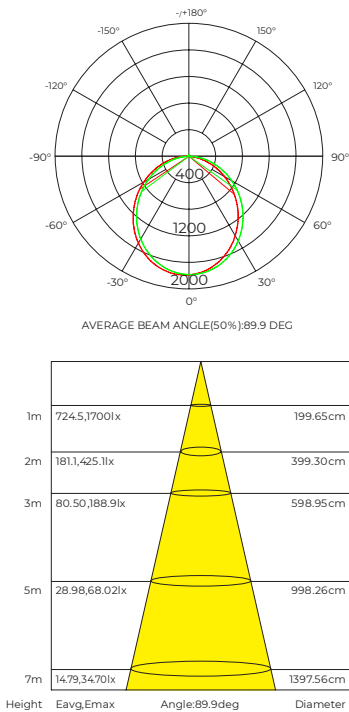

Ordering Code

Category		Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type									
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	37W	37	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L						
						Lens	L	Prismatic	P			White	W			2400mm						68W	68	3000K	WW						>90	9			Customized	S		
						Grating	G	12°	E			Black	B											4000K	NW													
						Louven	B	24°	F															5000K	DW													
								38°	H															6500K	W													
								Transparent	T																													
LLS		-		LS	60		F		D		F		S		S	2400	-		T		68		NW		8		B	-		D								



Ordering luminaires kits

LLS-LS60FDFSS2400-T68NW8B-DL




SEL-LS60FP

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-90lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- Prismatic Diffuser, highlight the texture, UGR value will be smaller.

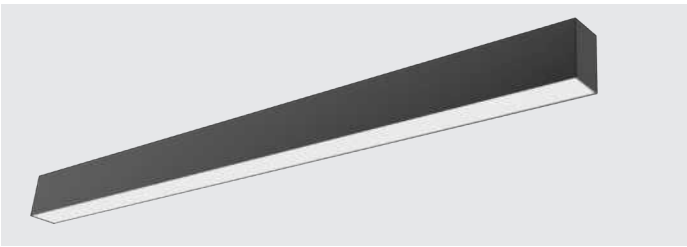

Luminaire parameters		
Size	L1194*W56*H85mm	L2380*W56*H85mm
Diffuser	Prismatic Diffuser	
Diffuser Material	PC	
Lumens	3300LM	6120LM
Typ.Power	37W	68W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	94°	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

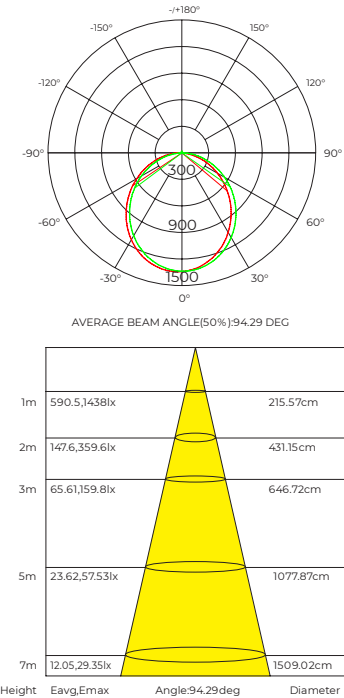

Ordering Code

Category		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		Light Source Type		Light Source Power		CCT		CRI		Power Type		Package		Label Type		
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	37W	37	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L
						Lens	L	Prismatic	P			White	W	2400mm	68W					68	3000K	WW	>90	9	Customized	S						
						Grating	G	12°	E			Black	B	4000K	NW																	
						Louven	B	24°	F			5000K	DW																			
						38°	H	6500K	W																							
						Transparent	T																									
LLS		-		LS	60	F	P	F	S	S	2400	-	T	68	NW	8	B	-	D													



Ordering luminaires kits

LLS-LS60FPFSS2400-T68NW8B-DL





SEL-LS60GX

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-90lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- 12°,24°,38° beam angles are available, precise light control.
- UGR<10

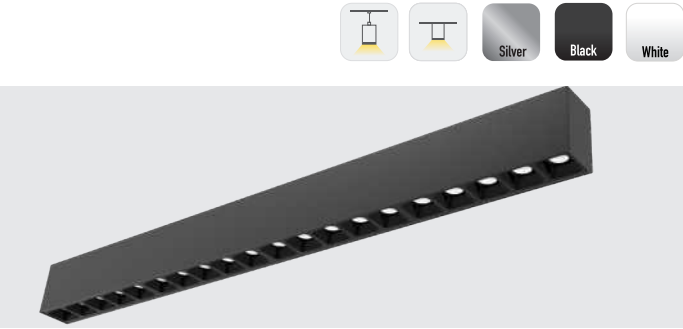

Luminaire parameters		
Size	L1144*W56*H85mm	L2284*W56*H85mm
Diffuser	Grating	
Diffuser Material	PC	
Lumens	2470LM	4950LM
Typ.Power	28W	53W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	12°、24°、38°	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

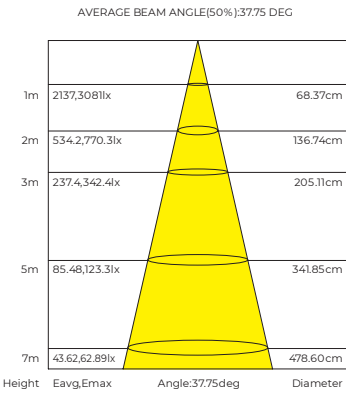

Ordering Code

Category			Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type		
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	28W	28	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L			
						Lens	L	Prismatic	P					White						W	2400mm	53W	53	3000K	WW						>90	9	Customized	S	
						Grating	G	12°	E					Black						B	4000K	NW													
						Louven	B	24°	F					5000K						DW															
								38°	H					6500K						W															
		Transparent	T																																
LLS	-		LS	60		G		E		F		B		S	1200	-		T		28		NW		8		B	-		D		L				



Ordering luminaires kits

LLS-LS60GEFBS1200 -T28NW8B-DL





SEL-LS60BD

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-70lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- Louven design, suitable for space main lighting.
- UGR<19

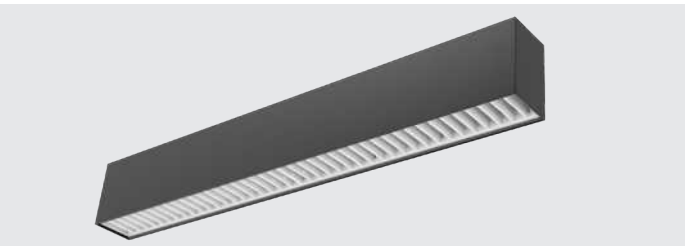

Luminaire parameters		
Size	L1196*W56*H85mm	L2392*W56*H85mm
Diffuser	Louven	
Diffuser Material	PC	
Lumens	2600LM	4780LM
Typ.Power	37W	68W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	70°	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

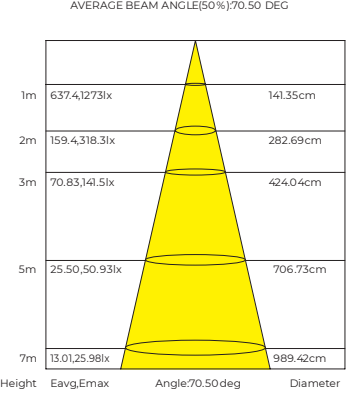

Ordering Code

Category		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-		Light Source Type		Light Source Power		CCT		CRI		Power Type		-		Package		Label Type				
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	37W	37	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L						
						Lens	L	Prismatic	P				White	W			2400mm					68W	68	3000K	WW		>90	9				Customized	S					
						Grating	G	12"	E				Black	B								4000K	NW															
						Louven	B	24"	F													5000K	DW															
								38"	H													6500K	W															
						Transparent	T																															
	LLS	-		LS	60		B		D		F		B		S	1200	-		T		37		NW		8		B	-		D			L					


Ordering luminaires kits

LLS-LS60BDFBS1200 -T37NW8B-DL





SEL-LS60LA

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-115lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- PMMA injection molding, better texture, more precise light control.
- Polarization angle 18°.



Luminaire parameters		
Size	L1180*W56*H85mm	L2357*W56*H85mm
Diffuser	Asymmetric	
Diffuser Material	PMMA	
Lumens	3100LM	6080LM
Typ.Power	27W	53W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	90° X65° (Asymmetric: 18°)	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

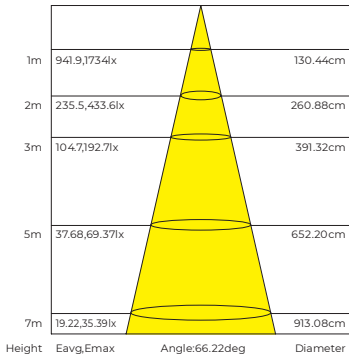

Ordering Code

Category		Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	-	Light Source Type	Light Source Power		CCT		CRI		Power Type		-	Package		Label Type				
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	27W	27	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L
						Lens	L	Prismatic	P			White	W	2400mm		53W	53			3000K	WW	>90	9	Customized	S							
						Grating	G	12°	E			Black	B			4000K	NW															
						Louven	B	24°	F					5000K	DW																	
								38°	H					6500K	W																	
					Asymmetric				A																							
	LLS	-		LS	60		L		A		F		B		S	1200	-		T		27		NW		8		B	-		D		L



Ordering luminaires kits

LLS-LS60LAFBS1200-T27NW8B-DL





SEL-LS60LS

- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- Up-to-130lm/W luminous efficiency.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional space and plane.
- PMMA injection molding, better texture, more precise light control.
- Polarization angle 40°.

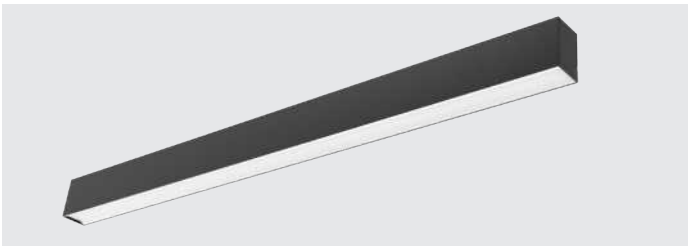

Luminaire parameters		
Size	L1180*W56*H85mm	L2357*W56*H85mm
Diffuser	Double Asymmetric	
Diffuser Material	PMMA	
Lumens	3500LM	6870LM
Typ.Power	27W	53W
CCT	2700K/3000K/4000K/6500K	
CRI	80 (90 optional)	
Beam Angle	115° X100° (Asymmetric: 40°)	
Input Voltage	AC200-240V	
Dimming	0-10V Dimming	
Color	White ☐ Black ☒ Silver ☐	
Installation	Pendant/Surface Mounted	
Warranty	5 years	
Certification	/	
Protection Level	IP20	

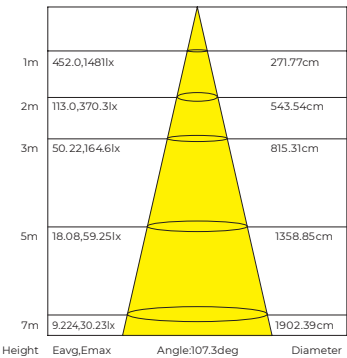


Ordering Code

Category		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
Stylish Lighting system	LLS -	Pendant	LS	60	Flat	F	Diffuser	D	Carrier	F	Silver	S	Holeless end cap	S	1200mm	-	Constant Current strip	T	27W	27	2700K	SW	>80	8	0-10V Dimming	B	-	SEL Individual	D	SEL	L	
					Lens	L	Prismatic	P			White	W			2400mm				53W	53	3000K	WW	>90	9						Customized	S	
					Grating	G	12°	E			Black	B			4000K				NW													
					Louven	B	24°	F			5000K	DW																				
							38°	H			6500K	W																				
					Double Asymmetric				S																							
	LLS -		LS	60	L			S		F	B		S	1200	-		T	27		NW		8		B	-		D		L			

Ordering luminaires kits

LLS-LS60LSFBS1200-T27NW8B-DL



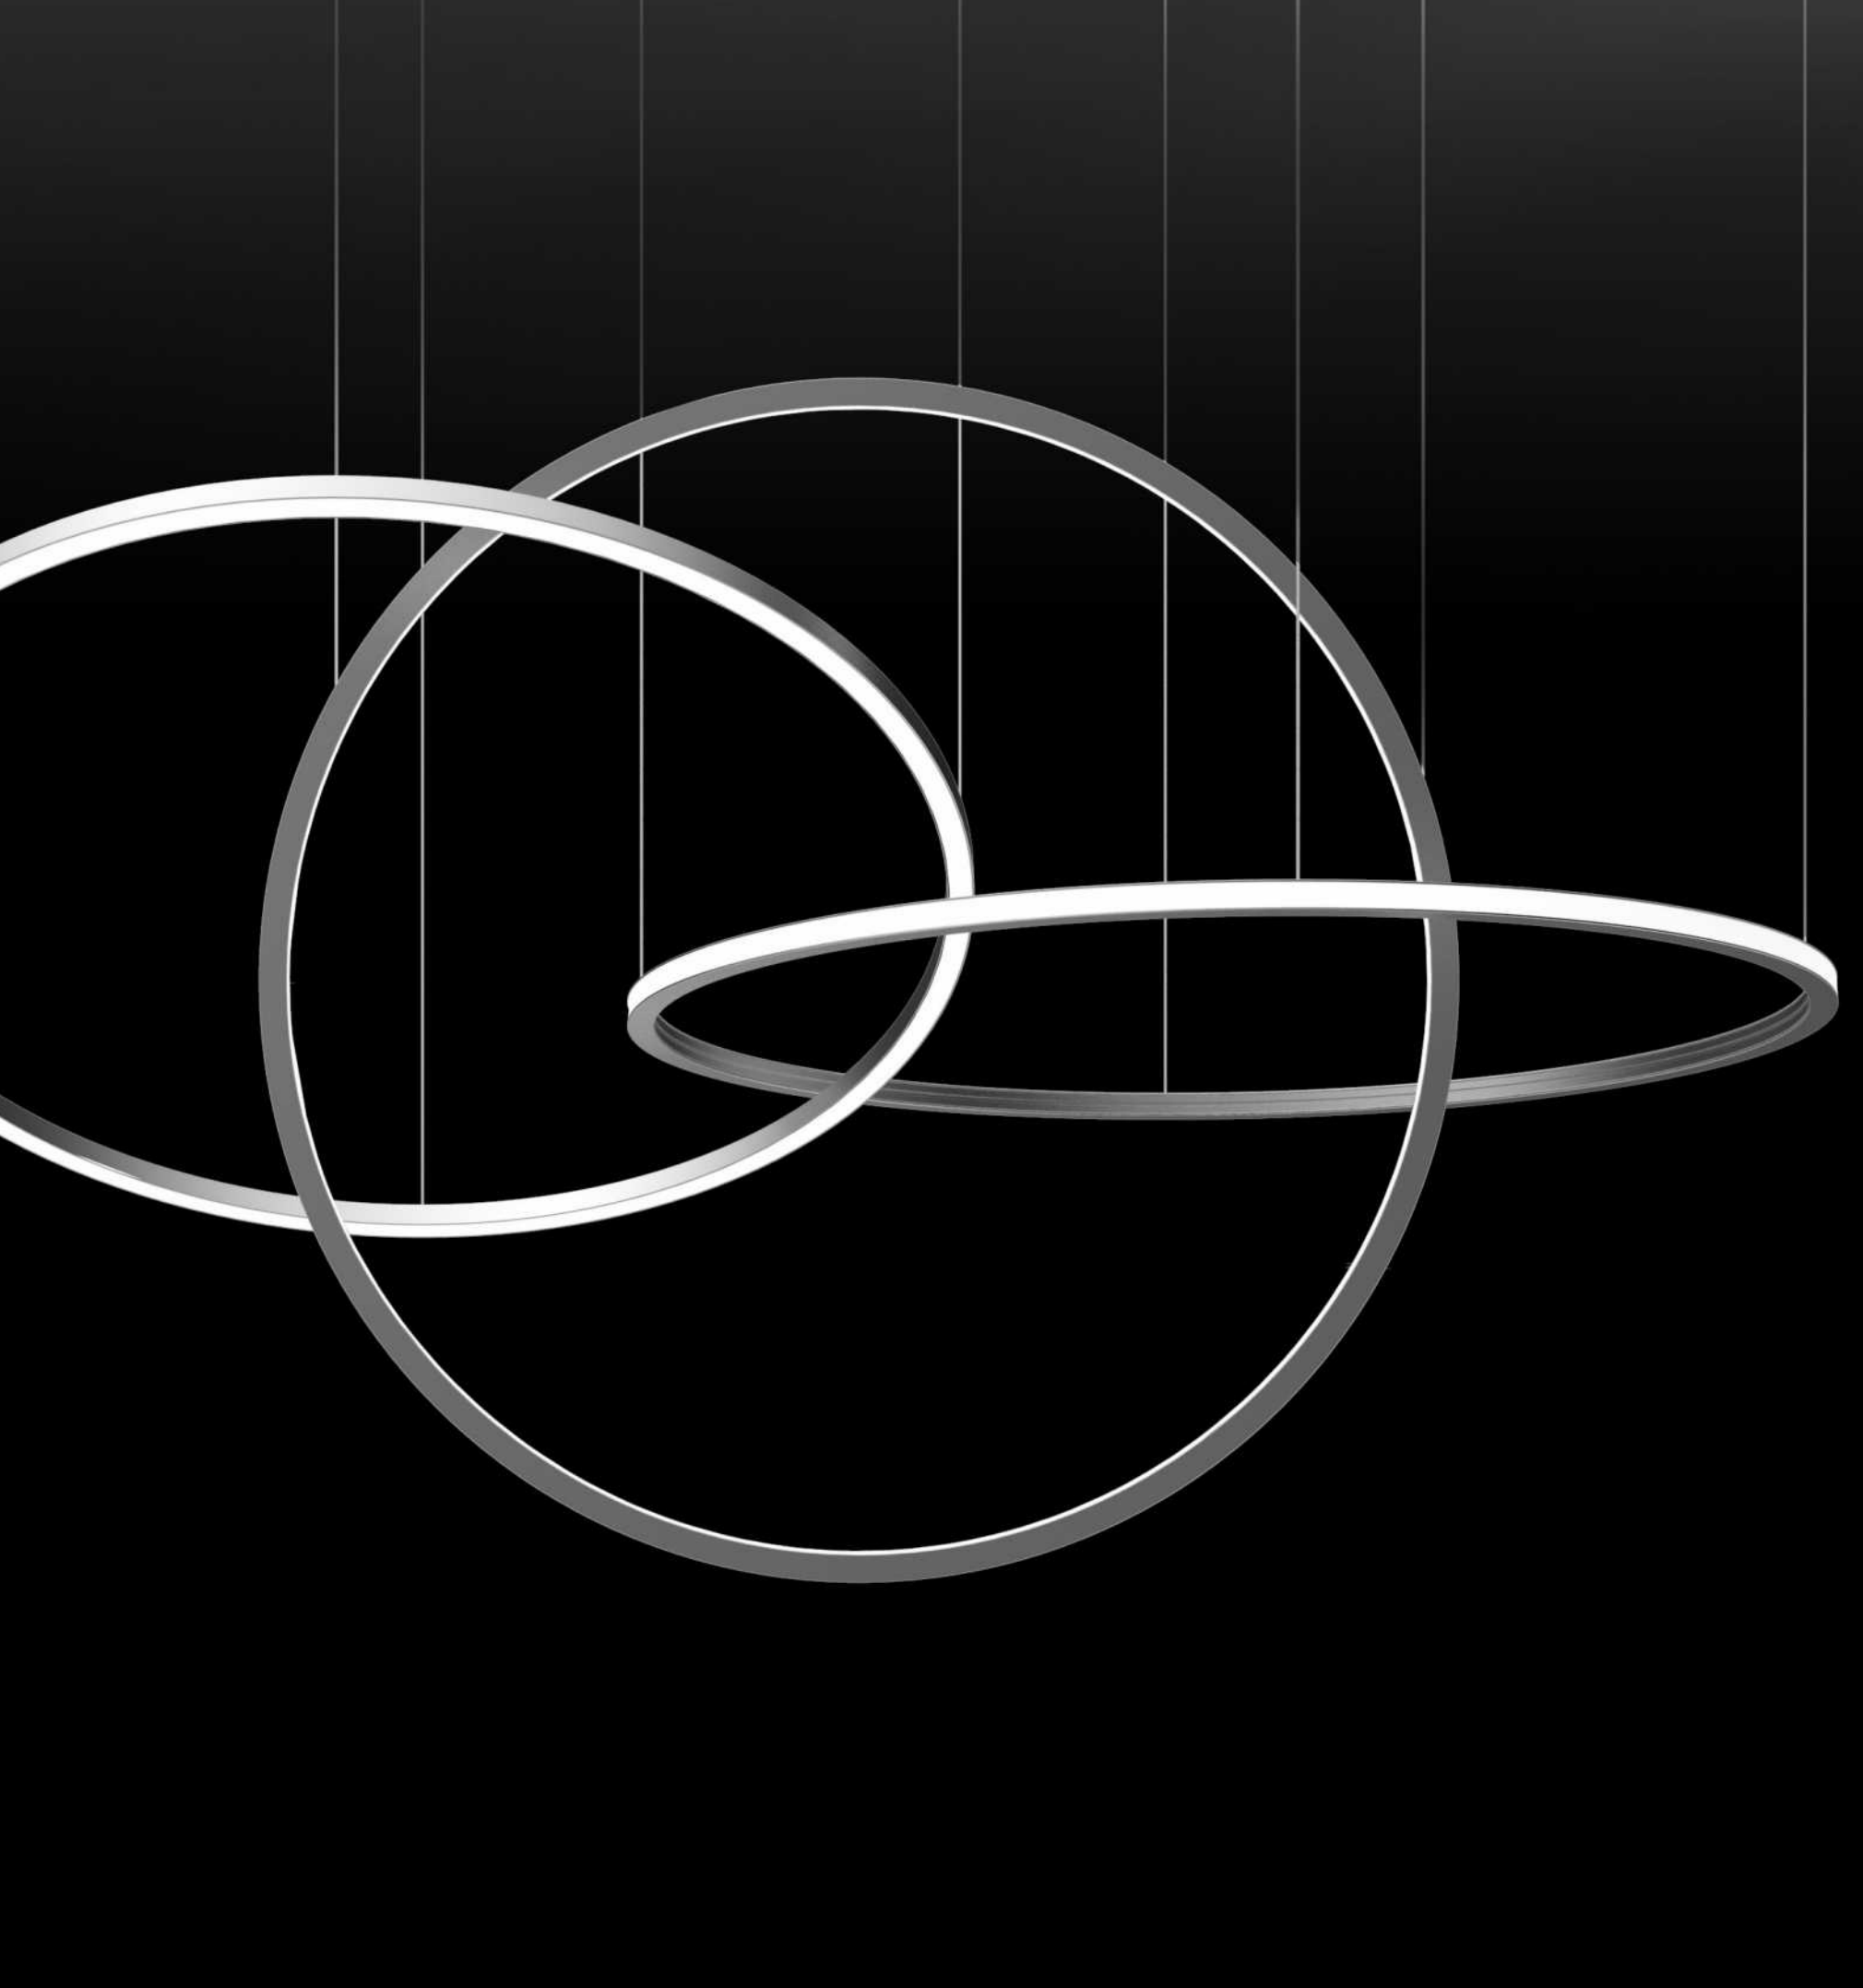

Circle Series

The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: downward lighting, outward lighting and inward lighting. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres. There are also multiple mounting methods optional: pendant, recessed, surface mounted and wall mounted, which are all perfectly compatible to the spacial structures of different areas, different rigidity and different materials.

Product List

Model	Diagram	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
AS3535 Series							
SEL-AS3535-08A360		35x35, D800 360°			Downward	DY8140-24V-20mm-08A45	
SEL-AS3535-15A360		35x35, D1500 360°			Downward	DY8140-24V-20mm-15A45	
SEL-AS3535-15N360		35x35, D1500 360°			Inward	D8140-24V-20mm	
SEL-AS3535-15W360		35x35, D1500 360°			Outward	D8140-24V-20mm	

Finished Luminaires



φ3m
(Lighting Downward)



φ1.5m
(Lighting Outward)



φ1.5m
(Lighting Inward)



φ1.5m
(Lighting Downward)



φ0.8m
(Lighting Downward)





SEL-AS3535-08A360

- Φ 0.8M, circular luminaires of downward lighting
- High quality surface treatment, three colors including black, white and silver optional
- Adopt silicone flexible diffuser, producing uniform and soft light
- Two-in-one pendant cable, beautiful overall effect
- Two installation ways: pendant and surface mounted



Luminaires Parameters	
Size	Φ800X35mm
Diffuser	Diffuser
Diffuser material	Silicone
Lumens	1630LM
Typ.power	50W
CCT	1900K/2300K/2700K/3000K/3500K/4000K/5000K/6000K
CRI	>80/>95
Beam angle	120°
Lighting direction	Downward
Input voltage	220-240VAC 50Hz/60Hz
Power factor	>0.9
Electric grade	Class II
Dimming	Non dimming
Color	Silver/White/Black
Installation	Pendant and surface mounted
Warranty	5 years

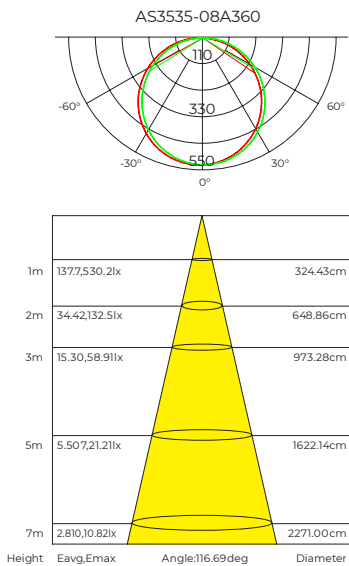

Ordering Code																																		
Category		-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type	
Stylish Lighting System	LLS	-	Arc pendant	AS	3535	Flat	F	Diffuser	D	No carrier	X	Black	B	Holeless end cap	S	Φ800mm, downward lighting, 360° luminaires	-	24VDC Rigid module	R	60W	60	1900K	GW	>80	8	Non dimming	N	-	SEL	L	SEL	L		
																						2300K	LW	>90	9						Customized	S		
																						2700K	SW											
																						3000K	WW											
																						3500K	PW											
																						4000K	NW											
																						5000K	DW											
																						6000K	W											
LLS	-		AS	3535		F		D		X		B		S	08A360	-			R	60		LW		8		N	-		L					

Ordering luminaires kits

LLS-AS3535FDXBS08A360-R60LW8N-LL





SEL-AS3535-15A360

- Φ 1.5M, circular luminaires of downward lighting
- High quality surface treatment, three colors including black, white and silver optional
- Adopt silicone flexible diffuser, producing uniform and soft light
- Two-in-one pendant cable, beautiful overall effect
- Two installation ways: pendant and surface mounted



Luminaires Parameters	
Size	Φ1500X35mm
Diffuser	Diffuser
Diffuser material	Silicone
Lumens	2850LM
Typ.power	90W
CCT	1900K/2300K/2700K/3000K/3500K/4000K/5000K/6000K
CRI	>80/>95
Beam angle	120°
Lighting direction	Downward
Input voltage	220-240VAC 50Hz/60Hz
Power factor	>0.9
Electric grade	Class II
Dimming	Non dimming
Color	Silver/White/Black
Installation	Pendant and surface mounted
Warranty	5 years

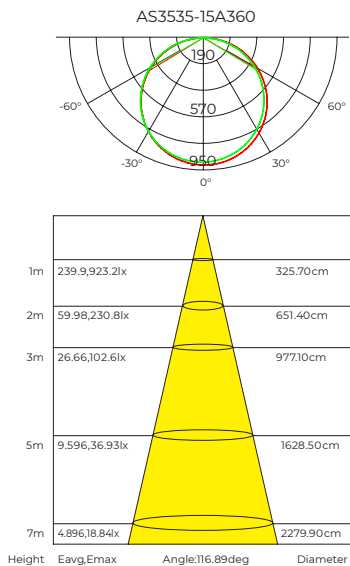

Ordering Code																																		
Category		-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type	
Stylish Lighting System	LLS	-	Arc pendant	AS	3535	Flat	F	Diffuser	D	No carrier	X	Black	B	Holeless end cap	S	Φ1500mm, downward lighting, 360° luminaires	-	24VDC Rigid module	R	105W	105	1900K	GW	>80	8	Non dimming	N	-	SEL	D	SEL	L		
																						2300K	LW	>90	9						Customized	S		
																						2700K	SW											
																						3000K	WW											
																						3500K	PW											
																						4000K	NW											
																						5000K	DW											
																						6000K	W											
LLS	-		AS	3535		F		D		X		B		S	15A360	-			R		105		LW		8		N	-		D				



Ordering luminaires kits

LLS-AS3535FDXBS15A360-R105LW8N-DL



SEL-AS3535-15N360

- Φ 1.5M, circular luminaires of lighting inward
- High quality surface treatment, three colors including black, white and silver optional
- Adopt silicone flexible diffuser, producing uniform and soft light
- Two-in-one pendant cable, beautiful overall effect
- Two installation ways: pendant and surface mounted

**Ordering Code**

Category		-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Typ. Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type	
Stylish Lighting System	LLS	-	Arc pendant	AS	3535	Flat	F	Diffuser	D	No carrier	X	Black	B	Holeless end cap	S	Ø1500mm, inward lighting, 360° luminaires	-	24VDC Flexible strip	F	105W	105	1900K	GW	>80	8	Non dimming	N	-	SEL	D	SEL	L		
																						2300K	LW	>90	9						Customized	S		
																						2700K	SW											
																						3000K	WW											
																						3500K	PW											
																						4000K	NW											
																						5000K	DW											
																						6000K	W											
LLS	-		AS	3535		F		D		X		B		S	15N360	-		F		105		LW		8		N	-		D					



- Ordering luminaires kits

LLS-AS3535FDXBS15N360-F105LW8N-DL



SEL-AS3535-15W360

- Φ 1.5M, circular luminaires of lighting outward
- High quality surface treatment, three colors including black, white and silver optional
- Adopt silicone flexible diffuser, producing uniform and soft light
- Two-in-one pendant cable, beautiful overall effect
- Two installation ways: pendant and surface mounted

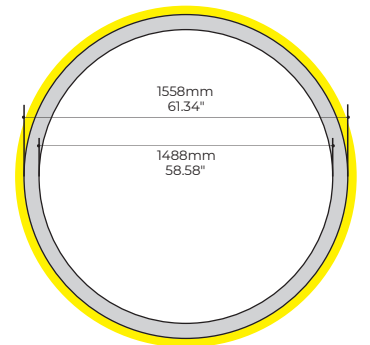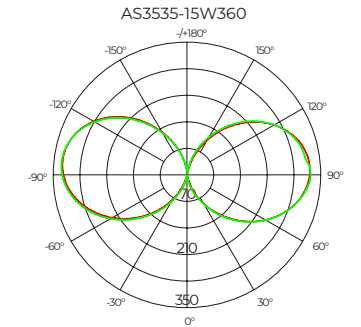**Ordering Code**

Category		-	Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		-	Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type		-	Package		Label Type				
Stylish Lighting System	LLS	-	Arc pendant	AS	3535	Flat	F	Diffuser	D	No carrier	X	Black	B	Holeless end cap	S	Ø1500mm, outward lighting, 360° luminaires	-	24VDC Flexible strip	F	105W	105	1900K	GW	>80	8	Non dimming	N	-	SEL	D	SEL	L					
																							2300K										LW	>90	9	Customized	S
																							2700K										SW				
																							3000K										WW				
																							3500K										PW				
																							4000K										NW				
																							5000K										DW				
																							6000K										W				
LLS	-	AS	3535	F	D	X	B	S	15W360	-	F	105	LW	8	N	-	D	L																			

- Ordering luminaires kits

LLS-AS3535FDXBS15W360-F105LW8N-DL





(619) 340-1203 | contact@90pluslighting.com | www.sel.lighting
90+ Lighting, 1094 Cudahy Place, Suite 212, San Diego CA 92110