

STD Series

Specification


FD192

24V-10mm



【General description】

- Chip strip,180° emitting , excellent anti-sulfide ability
- Reel to reel process,without soldering joint , high cost effective
- CRI>80,117LM/W
- 4 optional 2700K\3000K\4000K\6500K white lights

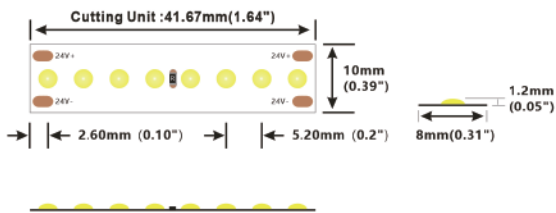

【Dimension】

- Input voltage: DC24V

CRI: 80

Max.power: 14.4W(1m)

Power range: 11.8~14.4W(1m)

Rated current: 0.54A(1m) /1.88A(5m)

Typical Power: 13W(1m) /45W(5m)

tape IP: IP20/IP65

On-off times: 10000 (test times)

Warranty: 3years
- Max.length: 5000mm(16.4')


Cutting unit: 8leds/41.67mm(2.46")

LED pitch: 5.2mm(0.2")

Min. bend diameter: Φ60mm(2.36")

Mounting: 3M tape


Copper foil: 2oz

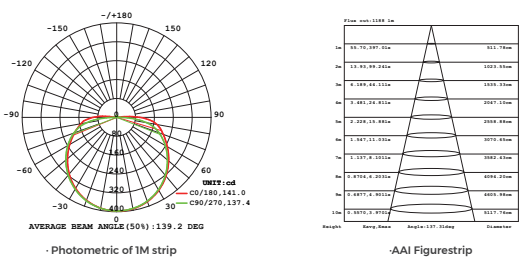


【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>80	SW	2700K	1290	390	99	F
Ra>80	WW	3000K	1310	400	101	F
Ra>80	NW	4000K	1470	445	113	F
Ra>80	W	6500K	1520	460	117	F

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter , data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

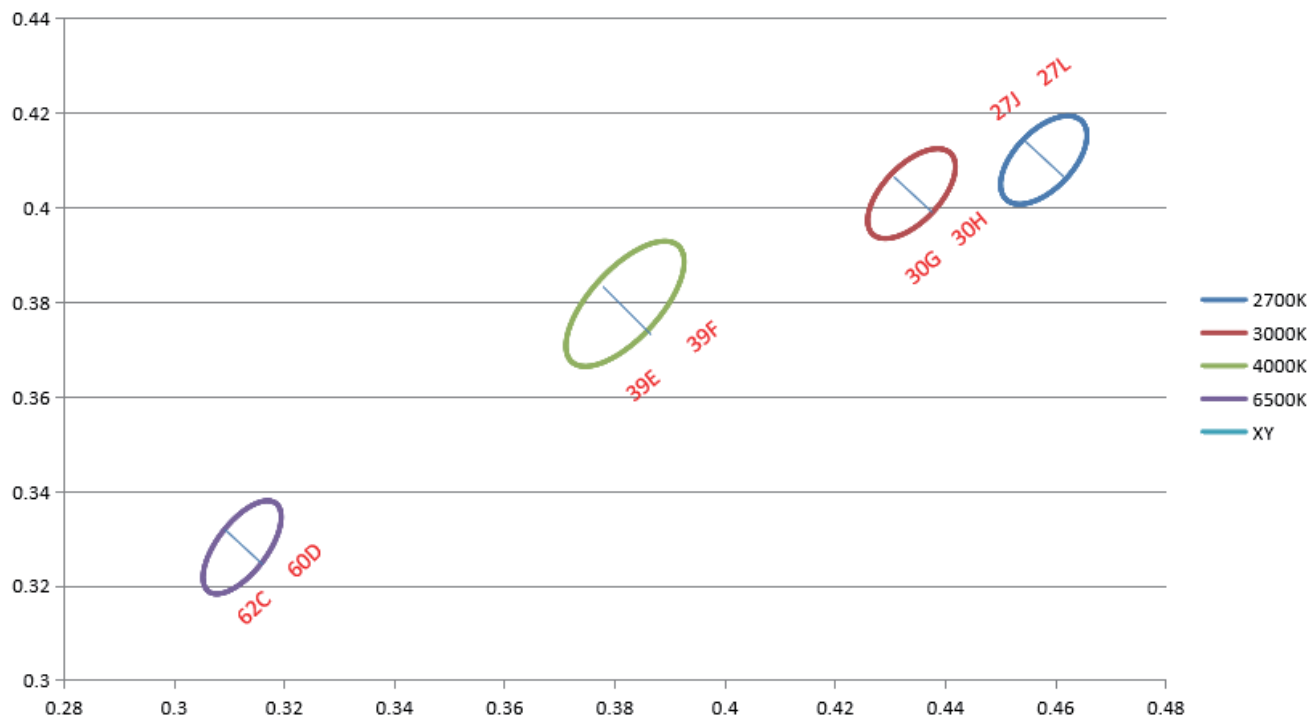

【IP process information】

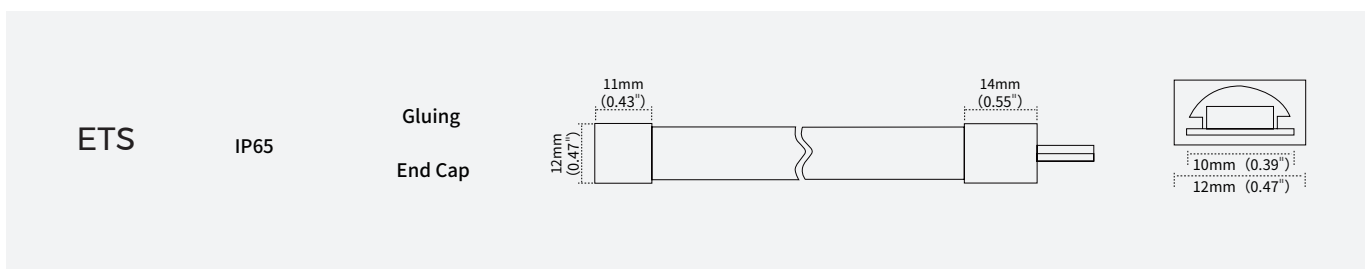

【Electronic & output data】


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO	 NO/IP20	No proof	10mm*1.2mm	2700K/3000K/4000K/6500K	100%
NA	 NANO/IP65	Nano-proof	10mm*1.2mm	2700K/3000K/4000K/6500K	98%
ETS	 ETS/IP65	Extrusion tube	12mm*4.8mm	2700K/3000K/4000K/6500K	88%

【Accessories Information】


Name	Picture	Code	coding	description
Connector for wire and FPC		94-03-00-0037	TXB210-NOGA	10mm width, 2PIN connector of wire and FPC, suitable for white color strip, NO/NA, 2PIN wire18- 22AWG
Connector for FPC and FPC		94-42-621020004	TBB210-NOGA	10mm width, 2PIN connector of FPC and FPC, suitable for white color strip,NO/NA
Slim connector		81-01-000000-000065	TBB210-NOTA	Suitable for 10mm board width, IP20, 2PIN board-to-board solderless terminal
Slim connector		81-01-000000-000067	TXB210-NOTA012	Suitable for 10mm board width, IP20, 2PIN wire- to-board solderless terminal
Fixed Clip		94-02-00-0003	FSW10SA	Silicone clip, screw: PA 3*8mm, suitable for 10mm FPC,EF/ET strip
Hole plug		94-03-00-0070	DPI0ETS-A	Silicone end cap without hole,suitable for 10mm PFC, ETS waterproof LED strip
Mounting groove		94-02-00-0025	CVT10EA-14100100	Transparent PVC mounting groove,suitable for 10mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	AS-PG-0003	Silicone gel,suitable for ET/EF/EG waterproof LED strip
ET solderless plug		94-03-00-0030	PT210-ETWA	Monochromatic light strip, 10mm board width, ET protection technology
ET press-fit terminals		94-03-00-0031	CBX210-ETWA020	Monochromatic light strip, 10mm board width, ET protection technology
ET press-fit terminal kit		94-03-00-0032	STBX210-ETWA020	Monochromatic light strip, 10mm board width, ET protection technology

【Packing】

SEL brand package

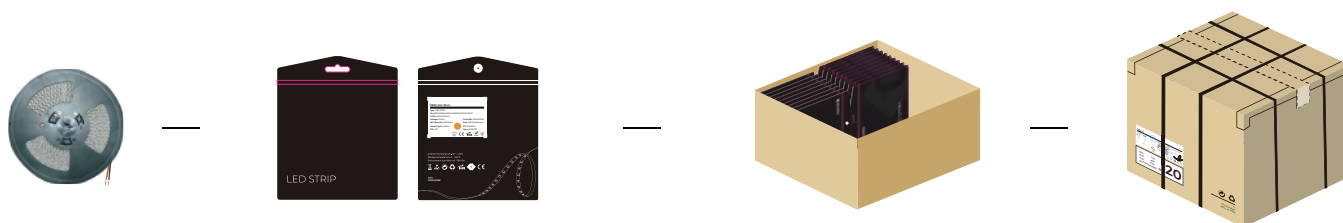

General customized package

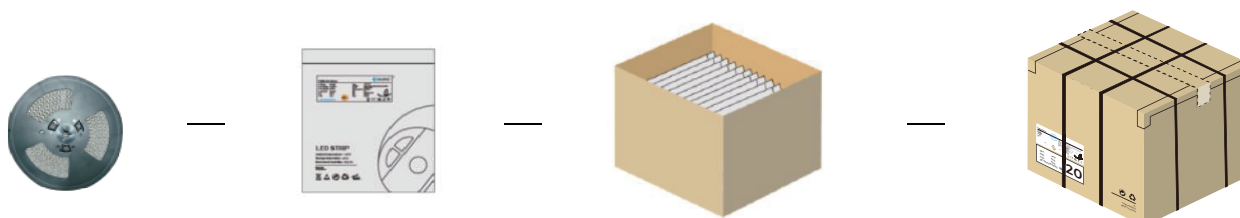

TEL: (619) 340-1203

E-mail:contact@90pluslighting.com


www.90pluslighting.com

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (mm)
NO	5000*10*1.2	5	270	0.1	5.4	6.21	365*365*190
NA	5000*10*1.2	5	270	0.11	5.94	6.831	365*365*190
ETS	5000*12*4.8	5	270	0.37	14.8	17.02	410*410*260


Remark: data with 10% tolerance

· Engineering packaging of ETS(IP65)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

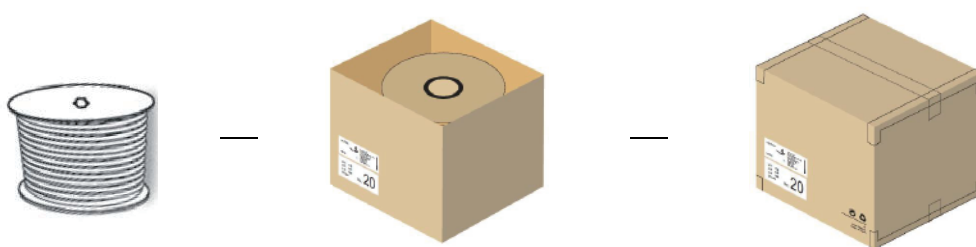

· Engineering packaging of NO(IP20)/NA(IP65).

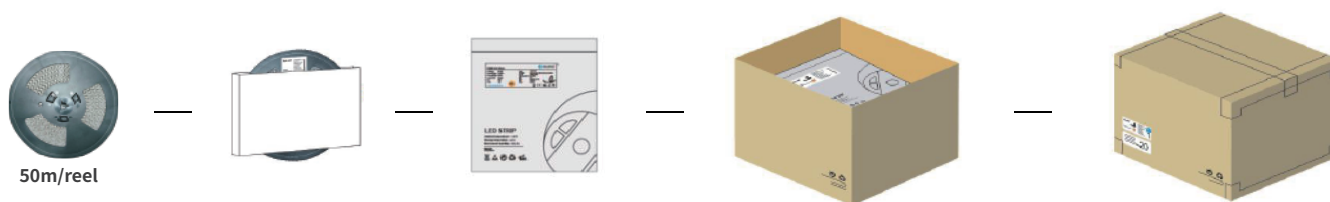

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (mm)
NO	50000*10*1.2	50	650	1	13	14.95	410*410*260
NA	50000*10*1.2	50	650	1.1	14.3	16.445	410*410*260
ETS	50000*12*4.8	50	100	3.7	7.4	8.51	255*255*260

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- DO NOT twist the strip, especially the emitting point, in case damage of LED chip
- ATTENTION, there are 2 soldering parts per reel (5m/reel) at most when mass production, just for few reels.
- Please do not bend the strip into an arc with a diameter less than 30mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED chip.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃.Storage temperature: 0℃~60℃.Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.