

Specification

Integrated Furniture Lighting

LE2409



LE2409



Features

DLS1.0, a special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.

1、“Dots-free”lighting

Perfect homogenous lighting

2、Bevelled light

Soft light,bevel lighting

3、“Two” end caps

Two options of end cap for two ways of wire outgoing, Close-fitting design without screws makes installation much easier

4、Various installation methods


A wide range of installation accessories wider applications

5、“One” cut


Consistent length between diffuser and profile

6、Smart control for unlimited possibilities

Perfectly match the profiles like customized, Control by hand sweep or touching



Details

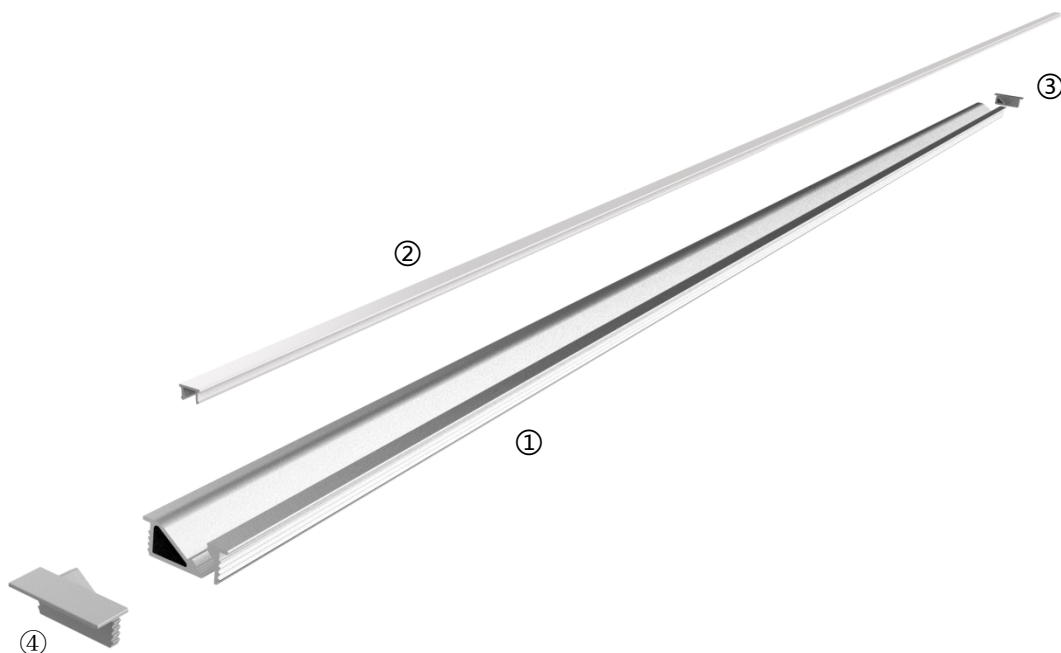

Standard Configuration



Picture	Item	Parameter
	① Profile	Material: AL6063-T5 Profile weight: 0.45kg/2.5m Size: L2500*W23.8*H8.8mm Surface processing: Silver alkali sand oxidation film
	② Cover	Type: Frosted diffuse Material: PC Light transmittance : 60% Size : L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10℃.
	③ End caps EC-LE2409FSS	Size : L23.8*W14*H8.8mm
	④ End cap with hole EC-LE2409FSD	Size : L23.8*W14*H8.8mm

Optional Accessories

Picture	Item	Parameter
	Flexible strip D6140-24V-4mm	Material : FPC,CCT : 2700/3000/4000/6000K ; CRI > 90 ; Voltage : 24V ;Power :6.6W/m ;Lumen :710Lm/m ;Width :4mm ;Minimum cutting unit : 7LEDs/50mm ;


Optical Parameter

D6140-24V-4mm driver, frosted diffuser

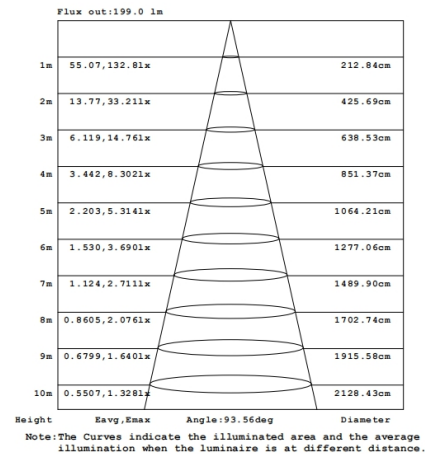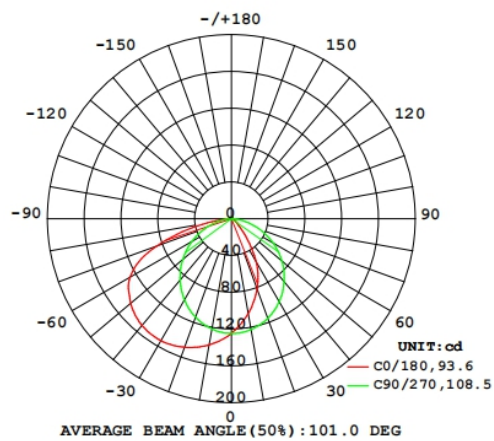


Package

Mode 1 :

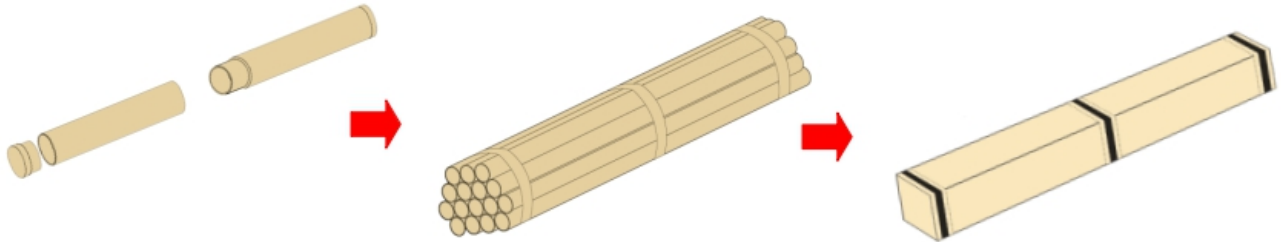

Mode 2 :

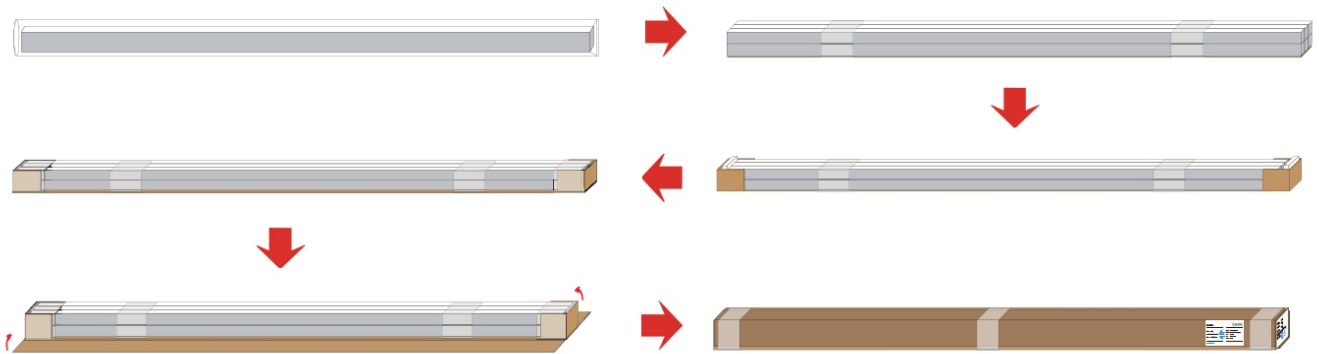

Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
Single piece	Hat box	Φ27mm*2580mm	0.42	0.86	1pcs/box
Whole bundle	Hat box	2580*210*150mm	14.7	33.1	35pcs/box
Whole box packaging	Paper box	2580*125*85mm	27.6	29.8	60pcs/box