





Neon Specification

NJS0612

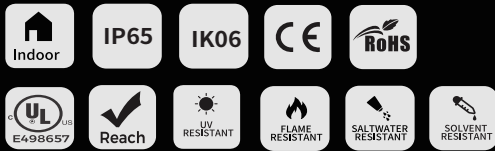

【Features】

- Light source: Reel-to-reel process, LM80 proved.
- Process & Material: High light transmittance, environmental silicone material, integrated extrusion molding technology,IP65.
- Optical Design: Unique optical light distribution structure design, uniform lighting surface and no shadow.
- Appearance Design: Compared with the traditional neon tube or PVC guardrail tube, the silicone material has good flexibility, the simple and stylish appearance, which is exquisite and unique.
- Product Certification: UL、CE、ROHS.
- Environmental Features: Resistance to saline solutions, acids & alkali, corrosive gases and UV.
- Working/Storage Temperature: Ta:-25~55℃ / 0℃~60℃.
- Application:Interior outline, auxiliary lighting.
- Indoor 3-year warranty, working life ≥ 36000 hours, outdoor 2-year warranty.

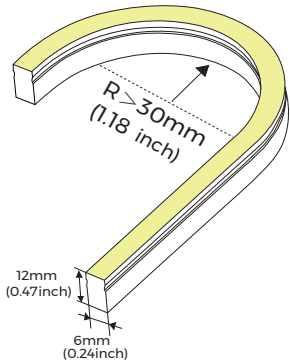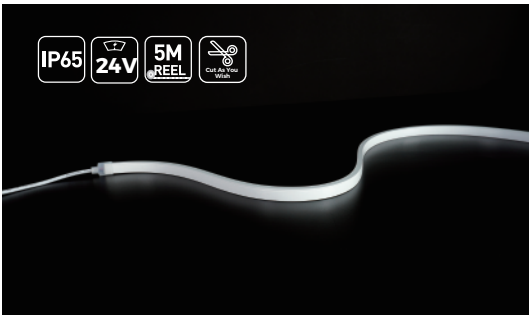


【Basic Parameters】

Model	CCT/colors	CCT range	CRI	Input voltage (V)	Rated current (A/m)	Rated power (W/m)	MAX power (W/m)	Lumens (LM/m)	Length	Remark
NJS0612-8XX24NSN050CSXXXX	2700K	2550-2850K	>80	24	0.37 (0.11A/ft)	8.8 (2.7W/ft)	9.6 2.93(W/ft)	320 (97LM/ft)	5000mm (16.4ft)	6LED/50mm
	3000K	2860-3250K						330 (100LM/ft)		
	3700K	3500-3900K						340 (103LM/ft)		
	5000K	4550-5050K						320 (97LM/ft)		

- Note:
- 1、The above data is the testing result of 1M standard product;
 - 2、The lumens of output data can be vary up to ±10%;
 - 3、The above parameters are all typical values;
 - 4、Standard glue plugs are shipped.

【Light Distribution】

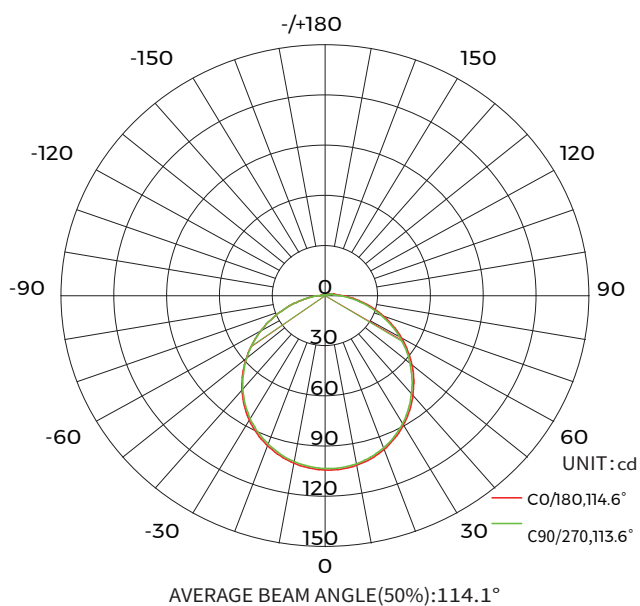

Light distribution

Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.

Flux out:250.3lm





Height	Eavg, Emax	Angle:113.42°	Diameter
1m	33.60,117.1lx		304.61cm
2m	8.401,29.28lx		609.22cm
3m	3.734,13.01lx		913.83cm
4m	2.100,7.320lx		1218.44cm
5m	1.344,4.685lx		1523.05cm
6m	0.9334,3.253lx		1827.66cm
7m	0.6858,2.390lx		2132.28cm
8m	0.5250,1.830lx		2436.89cm
9m	0.4149,1.446lx		2741.50cm
10m	0.3360,1.171lx		3046.11cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




Effective average illuminance

【Product Mechanical Parameters】













• IP65 Glued cap-top outlet



• IP65 Metal cap-top outlet



[Accessory Information]

Name	Description	Image	Sectional size	Ordering code	Quantity case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packing (mm)	Remark
Alumina carrier	Flat mounting aluminum groove			AS-NMS0612A-1000	120	0.082	9.84	11	1180*125*115	Size: L1000*W8*H13.5mm with screws
Aluminum clip	Flat mounting of clip			AS-NMS0612A-20	800	0.0017	1.68	1.83	250*250*150	Size: L20*W8*H13.5mm with screws
Alumina carrier	Aluminum groove reserved outlet position			AS-NMS0612A1-1000	100	0.01015	10.15	11.2	1180*125*115	Size: L1000*W8*H18.5mm with screws
Aluminum clip	Clip of reserved outlet position			AS-NMS0612A1-20	600	0.002	1.44	1.59	250*250*150	Size: L20*W8*H18.5mm with screws
PC carrier	Flat mounting PC groove			AS-NMS0612P-1000	120	0.0355	4.26	5.3	1180*135*130	Size: L1000*W8*H14.1mm with screws
PC carrier	Flat mounting of PC clip			AS-NMS0612P-20	800	0.0009	1.04	1.19	250*250*150	Size: L20*W13.5*H6.4mm with screws
Alumina carrier	Flush mounting slots			AS-NMS0612A3-1000	14	0.28	3.92	5	1180*135*130	Size: L1000*W8*H18.5mm with screws
Moldable carrier	Moldable groove			AS-NMS0612M-500	66	0.035	3.5	3.85	500*290*290	Size: L500*W7.3*H10.6mm with screws
Metal end cap kit	Metal end cap kit			AS-NJS0612TSH0-EC	2000	0.0015	1.2	1.5	250*250*150	/
End cap set	End cap set, including end cap and plug (outlet from the top direction)			AS-NMS0612GH0-EC	800	0.0035	1.44	1.7		
End cap set	End cap set, including end cap and plug (outlet from the left direction)			AS-NMS0612GS0-EC	800	0.0035	1.44	1.7		
End cap set	End cap set, including end cap and plug (outlet from the bottom direction)			AS-NMS0612GD0-EC	800	0.0035	1.44	1.7		
Glue	588G acidic glue		/	AS-PG-0002	150	0.014	2.1	2.4		10ml/pcs

【Accessory Information】

Name	Description	Image	Sectional size	Ordering code	Quantity case (PCS)	net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packing (mm)	Remark
Wire	2P PVC Wire (0.5M)		/	AS-WS-0005	150	0.0128	1.92	2.22	250*250*150	Suitable for single color strip
Wire	2P PVC Wire (2M)			AS-WS-0006	125	0.0512	6.4	6.7		
Gray wire	2PIN Gray wire (0.5M)			AS-WS-0009	200	0.0077	1.54	1.84		
Gray wire	2PIN Gray wire (2M)			AS-WS-0010	100	0.031	3.1	3.4		
Connector	2PIN IP68 waterproof connector		/	AS-FC-0001	512	0.016	8.192	9.5		Suitable for single color strip


【Solution Of Control System】

Product Image	Product Name	Product number	Order code	Product specifications	Applicable Products
	Monochrome remote	CK1-GBA	402-02-000000-00001	output signal: RF(2.4GHz) Working voltage: 3VDC (CR2032) Remote control distance: 30m Working temperature: Ta: 0-30 °C-0+55 °C	Monochrome light strip (Use with CR1-GBA)
	Monochrome light controller	CR1-GBA	402-01-000000-00001	Input voltage: 12-48VDC Output current: 15A@12V-10A@36V/48V Output Power: 180W@12V-360W@24V 360W@36V-480W@48V Working temperature: Ta: 0-30 °C-0+55 °C	Monochrome light strip (Use with CK1-GBA)

[Packaging Solutions]

• Standard Packaging


1. Line marking, the line marking is affixed at a distance of 80mm from the end of the line;

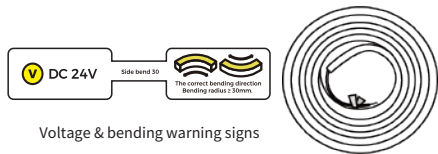

2. Put the product information label on the back back of the static bag inside the marking line;



3.Put the light strip into anelectrostatic bag, one roll per bag, and seal the bag;

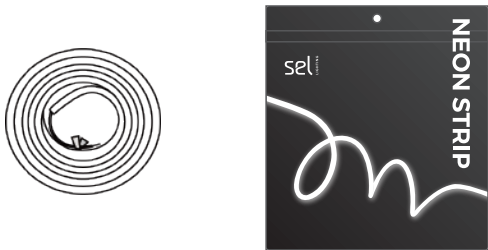


4. Label the carton and pack it into the carton



5. Pack 4 boxes of products in the carton



6. Put the product information label and the box number label on the side of the carton, and the QC inspection stamp

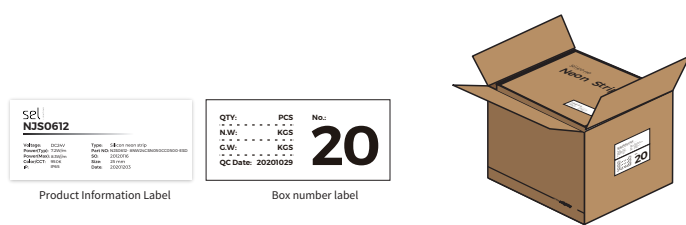


Model	Size	Product Quantity (box)	Product Quantity (case)	Net weight (kg)	Net weight per box (kg)	Gross weight (kg)	Carton size(m)
NJS0612-8XXXXCSN050CC0500-Plus	L5000*6*12mm	5M*4	80M	0.41	6.56	8.82	0.41*0.26*0.26

【Reliability test】

Test Item	Classification	Reference	Test method or condition
Safety test	Mechanical strength	IEC 60598-1; IEC 60598-2-21	The hammer spring Impact energy 0.35J
	IP	IEC 60598-1; IEC 60598-2-21	IP65
	Winding Test	IEC 60598-1; IEC 60598-2-21	φ150mm cylinder, 60N pull, winding 10 times at (-25°C ±2°C), and 10 times after(-15°C ±2°C, 16h).
	Cold Bend Test	IEC 60598-1; IEC 60598-2-21	wound on mandrel, low-temperature (-15°C ±2°C, 16h), around the mandrel for two turns
	Cold Impact test	IEC 60598-1; IEC 60598-2-21	Low-temperature (-15°C ±5°C, 16h), hammer falls from a height of 100mm.
	Insulation Resistance	IEC 60598-1; IEC 60598-2-21	≤ 2MΩ
	Electrical strength	IEC 60598-1; IEC 60598-2-21	500V
Mechanical reliability testing	Bending test	Colors	Each 200mm, bending up and down 100 times
	Bending test	Colors	Each 200mm, bending left and right 100 times
	Torsion test	Colors	Twist clockwise 5 times and then release, repeat 200 times
	Disassembly and assembly test	Colors	Repeat disassembly and assembly, 10 times
Environment Reliability testing	High temperature storing test	IEC 60068-2-2	80°C, 168h
	Low temperature storing test	IEC 60068-2-1	-40°C, 168h
	High temperature and Humidity impact	IEC 60068-2-78	60°C, 85%RH
	Salt Spray test	IEC 60068-2-11	5% salt solution concentration, 24h
	IK	IEC 62262	5 times of impact on each exposed surface
	Lifetime aging test	Colors	35°C, 6000h
	switch test	Colors	10s On, 10s Off, 10000 times

【Precautions】

- Use a 24V DC isolated power supply to drive the neon lamp strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the neon lamp strip.
- In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product.
- Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.
- Attention shall be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.
- Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- Please do not bend the strip into an arc with a diameter less than 30mm to ensure the longevity and reliability, the bending diameter too small will damage the product itself.
- If the actual length of application exceeds the specified using length, it will lead to overload heating and uneven brightness.
- Non-professionals are prohibited from installing, disassembling and repairing the product.
- Do not use any acid or alkaline adhesive to fix products (including not limited to glass cement, etc.)
- Products with different IP grade should be used in different environments, the product with IP65 is not suitable for use in water-immersed environment .
- The final color of products with different sizes and specifications is slightly deviated due to structural differences under the same color temperature, which should be confirmed before use.
- Engineering packaging neon strip (20 ~ 50m), please use the cable shed during construction to avoid damage caused by the tensile force of the product.
- In mass production, 1-2 splices are allowed within every 5 meters.
- Please use professional cutting tools when cutting.

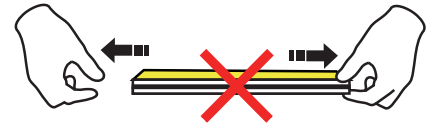

No stretching



No distortion



No trampling