

PRO Series

Specification


DS8256

24V-12mm



【General description】



- Bridgelux led integrated, High efficiency up to 140lm/w@4000K , CRI80+
- Constant current design, Same brightness from one end to another
- SDCM≤3,one Bin delivery, With life span over 60000H, 5 years warranty
- Ta: -25~40℃; Tc: 75℃ (max)

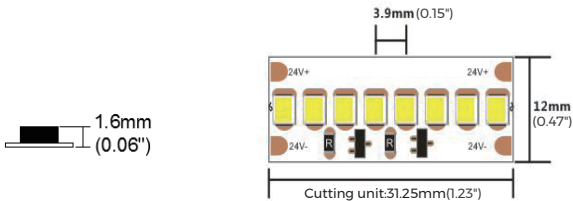

【Dimension】

- Input voltage: DC24V
 CRI: 80/90
 Max.power: 39W(1m)
 Power range: 31~39W
 Rated current: 1.42A(1m) /3.4A(2.5m)
 Typical Power: 34W(1m) /81.6W(2.5m)
 tape IP: IP20
 On-off times: 10000 (test times)
 Warranty: 5years






Max.length: 2500mm(8.2')
 Cutting unit: 8leds/31.25mm(1.23")
 LED pitch: 3.9mm(0.15")
 Min. bend diameter: Φ60mm(2.36")
 Mounting: 3M tape
 Copper foil: 3oz



【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>80	SW	2700K	4380	545	129	E
Ra>80	WW	3000K	4610	575	136	E
Ra>80	NW	4000K	4800	600	141	E
Ra>80	DW	5000K	4800	600	141	E
Ra>80	W	6500K	4610	575	136	E
Ra>90	SW	2700K	3720	420	109	F
Ra>90	WW	3000K	3920	445	115	F
Ra>90	NW	4000K	4080	465	120	E
Ra>90	DW	5000K	4080	465	120	E
Ra>90	W	6500K	3920	445	115	F

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

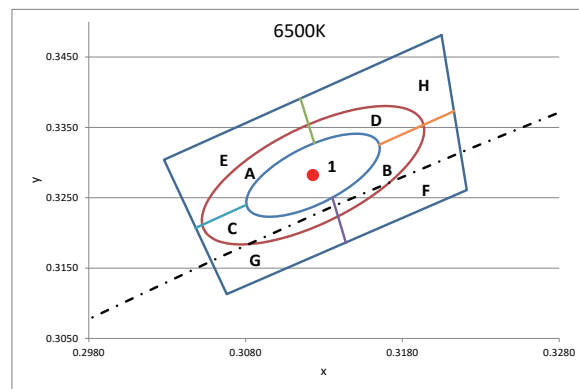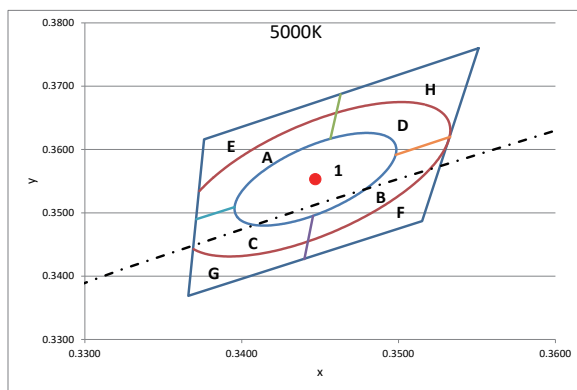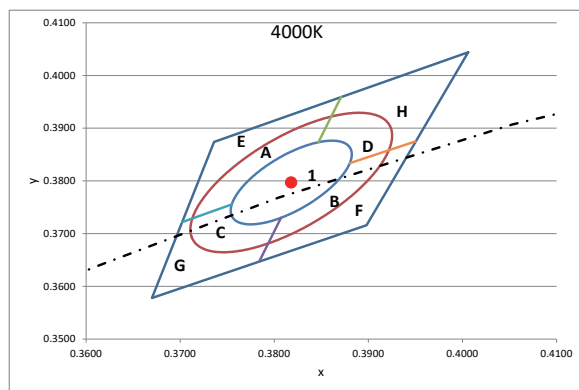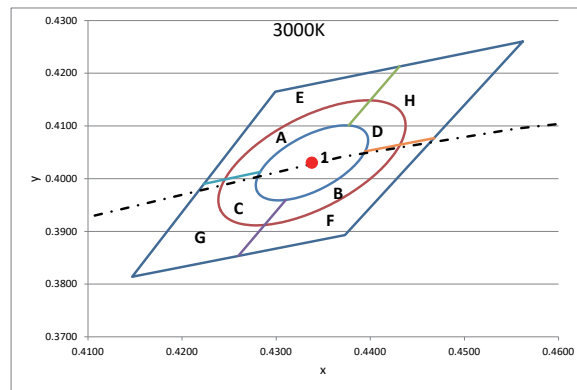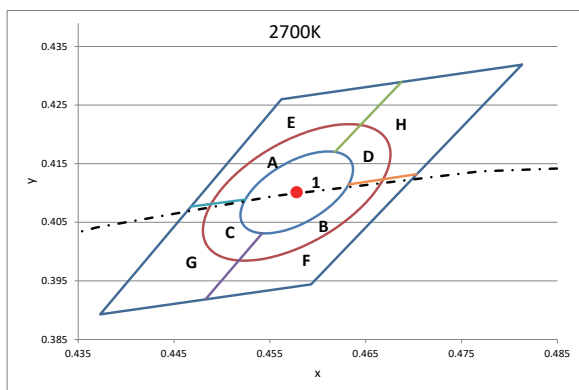

【Electronic & output data】


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	12mm*1.6mm	2700K/3000K/4000K/6500K	100%

【Accessories Information】


Name	Picture	Code	coding	description
Connector for wire and FPC		94-03-00-0038	TXB212-NOGA	12mm width, 2PIN connector of wire and FPC, suitable for white color strip, NO/NA, 2PIN wire18- 22AWG
Connector for FPC and FPC		94-03-00-0040	TBB212-NOGA	12mm width, 2PIN connector of FPC and FPC, suitable for white color strip,NO/NA

【Packing】

SEL brand package

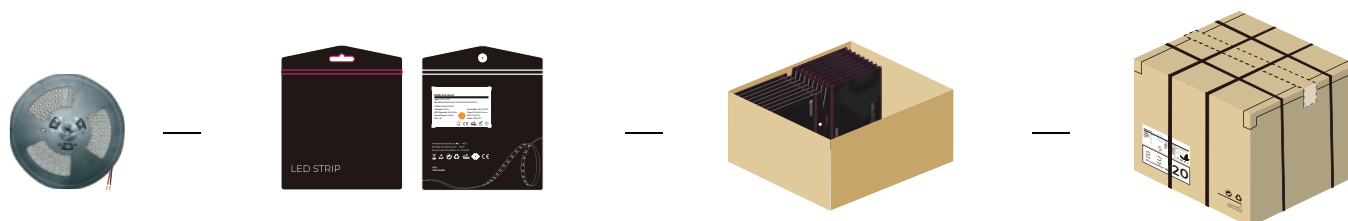

General customized package

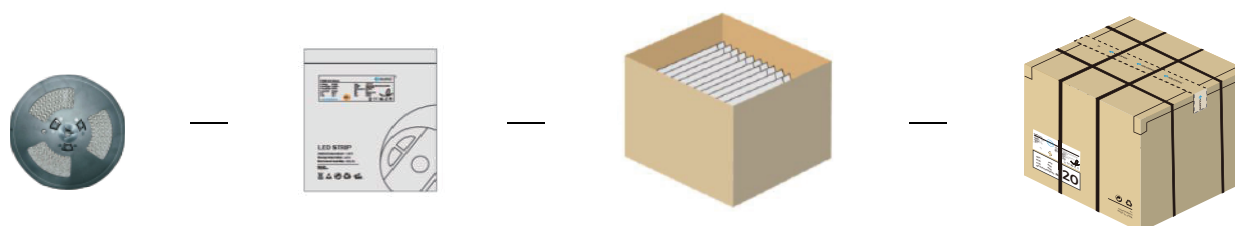

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	2500*12*1.6	2.5	125	0.125	6.25	7.18	41*41*26

Remark: data with 10% tolerance

· Engineering packaging of NO(IP20)/NA(IP65).



IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	50000*12*1.5	50	400	2.5	20	23	41*41*26

Remark:data with 10% tolerance

TEL: (619) 340-1203

E-mail:contact@90pluslighting.com

www.90pluslighting.com

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃.Storage temperature: 0℃~60℃.Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).